



8 reasons to buy a Daikin (multi-)split system

Full R-32 range for average and cold outdoor temperatures

1 Best performance and highest energy efficiencies



2 Top indoor air quality through **unique filtration**




3 Reliability thanks to **best technologies and service**



4 Connectivity: **WLAN available** on all units



5 Multi connection up to **5 ports**



6 Highest quality standards: from parts to production



7 Best comfort through **intelligent sensors** and **airflow techniques**



8 Iconic and **award-winning** design



Residential

air to air solutions

Why choose a Daikin split system?	270
Product range overview	284
Benefits overview	286
R-32 standard range	288
Wall mounted units	288
^{UNIQUE} ^{NEW}  FTXZ-N / RXZ-N	289
^{NEW} FTXJ-AW/S/B / RXJ-A	292
stylish	294
perfora	294
comfora	300
FTXP-M (9) / RXP-M(9)	301
sensira	302
sensira	303
^{NEW} sensira	304
Floor standing units	306
C/FVXM-A / RXM-R(9)	308
FVXM-F / RXM-R(9)	309
Concealed ceiling unit	310
FDXM-F9 / RXM-R(9)	310
Multi outdoor units	312
^{NEW} 2MXM40-50-68A	313
^{NEW} 3MXM40-52-68A	313
^{NEW} 4MXM68-80A	313
^{NEW} 5MXM90A	313
Multi+ outdoor unit and tank	314
^{NEW} 4MWXM52A	314
EKHWET-BV3	314
Sensira multi outdoor units	316
2-3MXF-A(9)	316
Hybrid multi	317
CHYHBH-AV32 / EHYKOMB-AA2/3	317
R-32 Siesta range	318
Siesta wall mounted units	318
ATXM-R / ARXM-R(9)	319
ATXP-M / ARXP-M	320
^{UPDATE} ATXF-D/A / ARXF-D/A	321
ATXC-C / ARXC-C	322
^{NEW} ATXQ-A / ARXQ-A	323
Siesta multi outdoor unit	324
2/3AMXM-M9/N9	324
2-3AMXF-A(9)	325
R-32 Optimised heating range	326
Wall mounted units	327
^{NEW} ^{NEW} ^{UPDATE} ^{UPDATE} ^{Options & accessories} ^{Combination tables} ^{Bluevolution for complete range} 	327
stylish	327
perfora	328
comfora	329
Floor standing units	330
perfora	330
Siesta wall mounted units	331
ATXTP-M / ARXTP-R	331

For latest data, please consult my.daikin.eu

BLUEVOLUTION

The Bluevolution technology combines a specifically developed compressor and the R-32 refrigerant. Daikin is the first company in the world to launch heat pumps equipped with R-32. With a lower Global Warming Potential (GWP), the R-32 is equivalent in power to standard refrigerants, but achieves higher energy efficiency and lower CO₂ emissions. Easy to recover and reuse, R-32 is the perfect solution for attaining the new European CO₂ emission targets.



A+++


Best performance


and highest energy efficiencies

An air conditioner provides you comfort all year long. Whether it is extremely cold or hot outside, you expect your air conditioner to perform in the same stable way. Our units are tested in all weather conditions, guaranteeing their capacity at all outdoor temperatures. Our special optimised for heating range provides heating even at -25°C.




Additionally we strive for offering units with the **highest seasonal energy efficiencies, up to A++ in cooling and heating**. This performance and efficiency level can only be met by implementing the best technologies in our units.

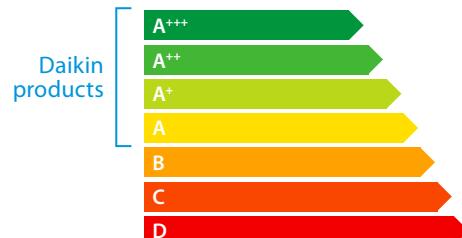


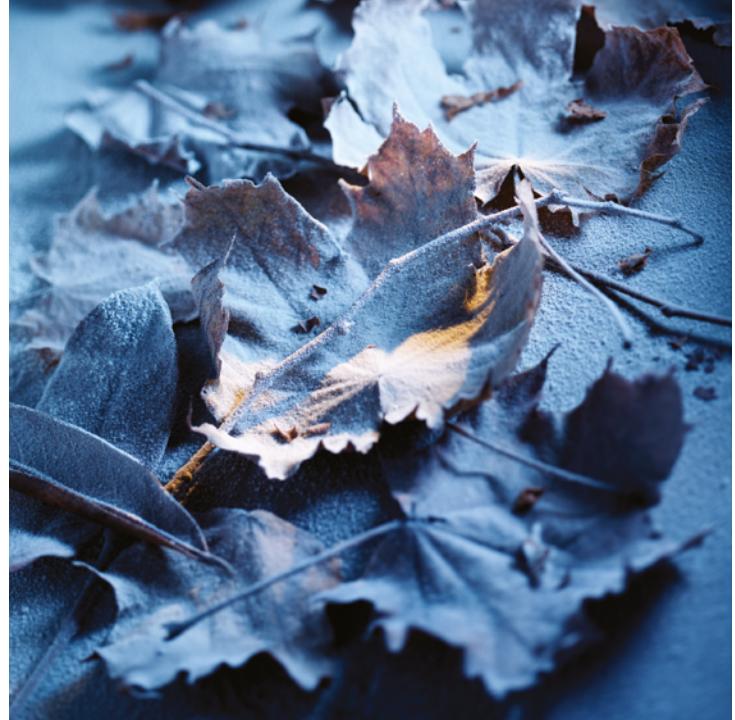

Heat pump principle

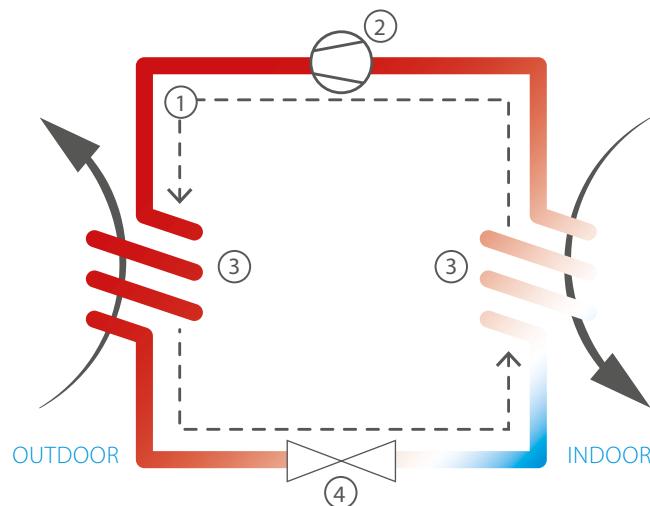

COOLING CYCLE

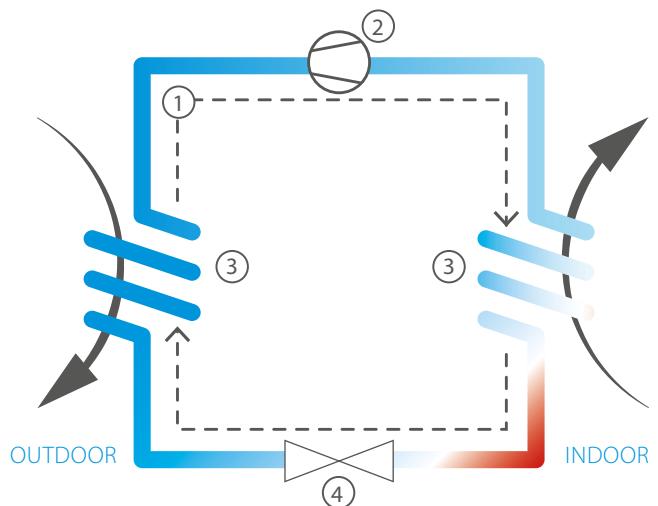

HEATING CYCLE

- ① **REFRIGERANT:** R-32 is the best energy performing refrigerant with low environmental impact, developed and produced by Daikin.
- ② **COMPRESSOR:** Our in-house developed swing compressor provides maximum capacity
- ③ **2 HEAT EXCHANGERS:** The evaporator and condenser are made out of high quality copper tubes, with incisions inside of the tubes to increase the exchange of heat even more.

The aluminium fins on the outdoor unit are precoated, making them resistant for harsh outdoor conditions

- ④ **THE ELECTRONIC EXPANSION VALVE**
releases the liquified refrigerant electronically in the evaporator thus exact temperatures can be reached in the evaporator.

This results in:

- > Best comfort
- > Best and reliable energy efficiencies



Top indoor air quality through unique filtration

Internal pollution has less obvious consequences on people and manifests the effects in the long run, this causes a lower level of attention.

90% of our time is spent indoors.

The indoor air is 2 to 5 times more polluted than outdoor air.

Within our air conditioners, we offer **several filtering techniques** depending on the range:

	Flash Streamer	Titanium Apatite deodorising filter	Silver Allergen removing filter	Dust Filter	Self Cleaning Air filter
Ururu Sarara	•	•			•
Stylish	•	•	•	•	
Daikin Emura		•	•	•	
Perfera	•	•	•	•	
Comfora		•	•	•	
Sensira		•		•	

The **different type of filters** remove odours, allergens and dust.

		Odours 	Allergens 	Dust 
Flash streamer	Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air	•	•	
Titanium apatite deodorising filter	Decomposes bothersome odours of for example tobacco and pets	•		
Silver allergen removal and air purifying filter	Captures allergens such as pollen to ensure a steady supply of clean air		•	
Dust filter	Removes airborne dust particles to ensure a steady supply of clean air			•
Self-cleaning filter	The air filter removes airborne dust particles from the air while the integrated brush regularly and automatically cleans the filter to ensure a steady supply of clean air			•

To increase your personal comfort and indoor air quality to a next level,
our air conditioners can work together with our air purifiers.

If you only require heating or cooling, an air conditioner is sufficient. If you want perfect indoor air quality including heating and/or cooling, it is advised to combine your air conditioning system with an air purifier.

Comfort



- › Cooling
- › Heating
- › Air purification by removing odours, allergens, dust

99,98%
of coronavirus
removed in
2.5 minutes



Pure air




- › Proven effectiveness against respiratory viruses evaluated by Institut Pasteur de Lille
- › Humidification



Air purifier filtering principle

CLASH

The dust collection filter catches the floating substances with the attached harmful gases and Streamer decomposes the gases by oxidation.

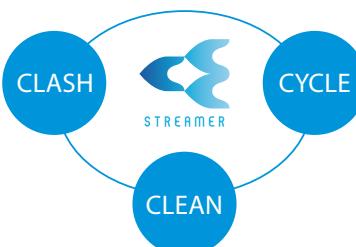

CYCLE

The deodorising filter adsorbs and decomposes odour. Thanks to the regeneration of the adsorbing capacity, the deodorising capacity is maintained. No need to change the deodorising filter, unlike air purifiers with activated carbon filters.

CLEAN

Removes bacteria from dust collection filter and humidifying filter.

*Daikin device MCK55WVM (commercial name MCK55W), tested by Institut Pasteur de Lille, removes 99.996 % of Human Coronavirus HCoV-229E in 2.5 minutes running time at 'turbo' speed in laboratory conditions(air-tight chamber with inner volume 0.47 m³, no air renewal). Human Coronavirus HCoV-229E is different from the virus responsible for COVID-19, SARS-CoV-2, but belongs to the same family of coronaviruses. Daikin device MC55WVM (commercial names MC55W/VB), tested by Institut Pasteur de Lille, removes 99.98 % of Human Coronavirus HCoV-229E in 2.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 1.4 m³, no air renewal). Human Coronavirus HCoV-229E is different from the virus responsible for COVID-19, SARS-CoV-2, but belongs to the same family of coronaviruses. Daikin device MCK55WVM (commercial name MCK55W), tested by Institut Pasteur de Lille, removes 99.986 % of Influenza A virus subtype H1N1 in 2.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 0.47 m³, no air renewal). Daikin device MC55WVM (commercial names MC55W/VB), tested by Institut Pasteur de Lille, removes 99.93 % of Influenza A virus subtype H1N1 in 2.5 minutes running time at 'turbo' speed in laboratory conditions (air-tight chamber with inner volume 0.47 m³, no air renewal).



NEW

DCS Lite

From the professional portal, installers can activate the remote monitoring allowing them to supervise your installation on multiple parameters, from their location. They will get an automatic notification in case there is something wrong with the installation. By changing certain settings they can improve your comfort immediately. Save time and get a better support, thanks to these new features.

How to access?


Through the e-care app and SBM Pro portal.

What to expect


Remote monitoring and servicing of split products, after consent from the end user.

- › Control your customer's unit and change settings.
- › Read out temperature, energy consumption and error codes.

	Description	DCS lite
CONTROL	Unit on/off	•
	Operation mode	•
	Temperature set point	•
	Fan speed	•
	Econo mode	•
	Schedules	•
	Flash streamer	•
	Powerful mode	•
	Comfort	•
	Horizontal swing	•
	Vertical swing	•
	Demand control	•
	Holiday mode	•
	Indoor temperature	•
INFO	Outdoor temperature	•
	Energy consumption	•
	Error state & code	•
	Adapter model number	•
	Adapter serial number	•

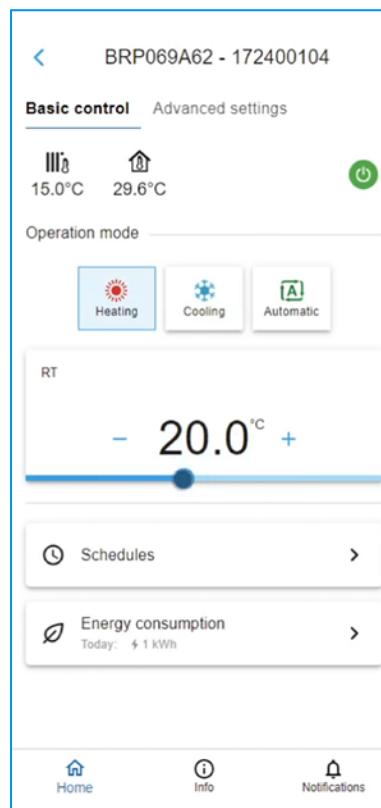

Adjust a room setpoint remotely

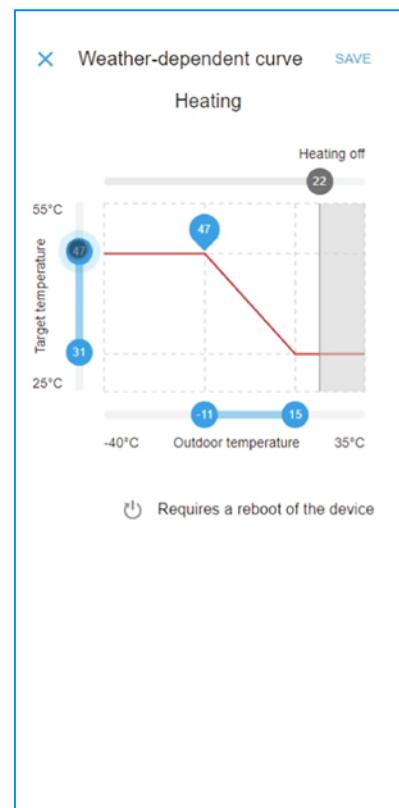

Adjust the weather-dependent curve remotely

Connectivity

The Onecta app can control and monitor up to 50 split air conditioning units.

All Bluevolution units are connectable with the Onecta app.


Control

Control operation mode, temperature, air purification, fan speed & direction




Schedule

Schedule the set temperature, operation mode and fan speed

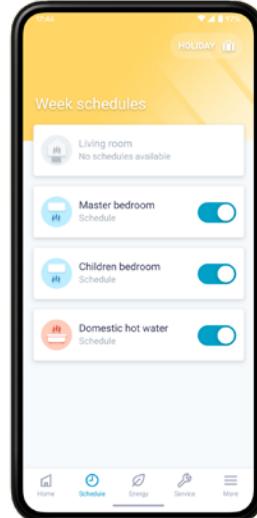


Monitor

Monitor your energy consumption, set holiday schedule

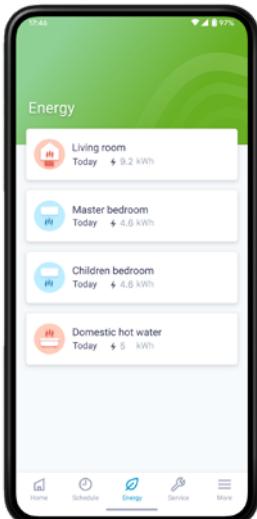

Identify

Identify the rooms of your house

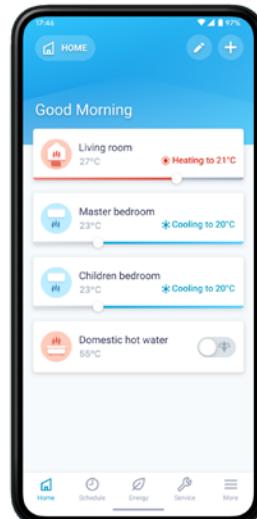


Intuitive online and voice control

Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!


Your benefits

- › Access to various features for controlling your internal climate
- › Manage the temperature, operating mode, air purification and fans with the interactive thermostat
- › Create different operating schedules and modes
- › Monitor energy consumption

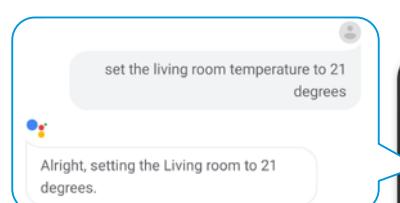

amazon alexa

works with the
Google Assistant

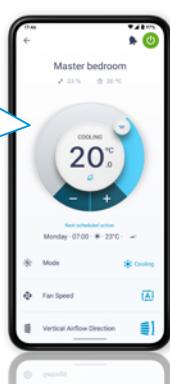




Multi


A Daikin multi split system offers you unexpected possibilities in creating a comfortable and cosy home. This is your solution to reduce limitations like environmental impact and financial aspects.

Choose between 2 options

Multi
for cooling and heating
(up to 5 indoor units)

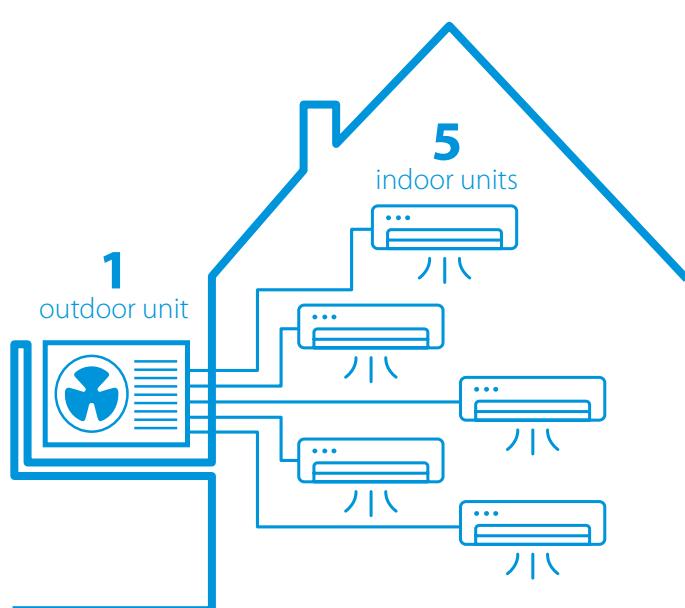

NEW Multi+
for cooling, heating and hot water
Connect **Multi+ outdoor unit** with up to 3 indoor units and a 90 l or 120 l tank to provide domestic hot water

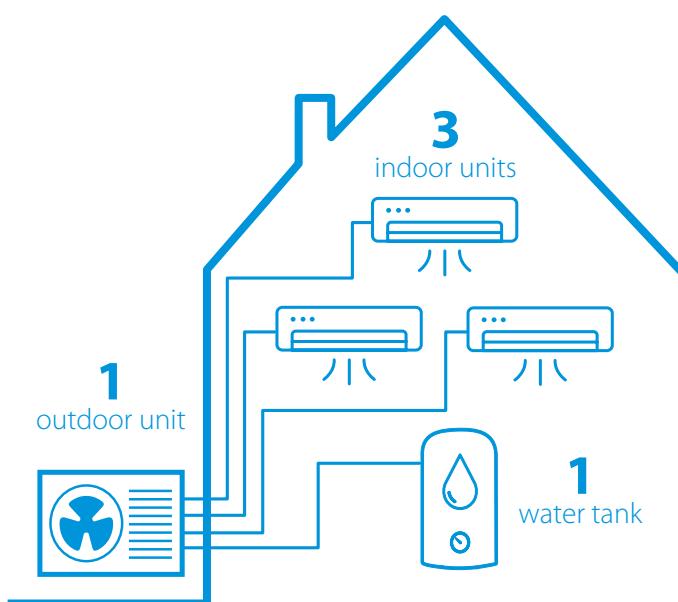

Less mounting space, less visibility, less sound



SAVE SPACE

Drastically reduce the space required for placing a number of units on your facade.



LESS VISIBILITY

Enjoy your nice ambience. Finding just one hiding place is much easier.



LESS NOISE

Only one unit in operation is much quieter than two or more units.

Easier installation, wiring, piping and maintenance



SAVE MOUNTING EQUIPMENT

Wherever you want to place an outdoor unit, for every unit you will need correct mounting equipment for a secure fixing and problem-free operation.



SAVE TIME

The physical installation, wiring, drain piping as well as the initial setup of only one system is much easier and faster.



REDUCED CHANCE OF TECHNICAL ERRORS

When using only one outdoor unit instead of two or more, the statistical probability of a possible technical defect is reduced with every unit that you do not need.

More flexibility: connect up to 5 indoor units of any style

There are many possibilities in comfort you can profit from a multi split solution:



Up to 5 indoor units connectable to **only one outdoor** unit



Every single indoor unit can be **regulated separately**



Choose from a **greater variety** of connectable indoor unit types out of our split and Sky Air series



Use **low capacity** indoor units specially designed for small rooms which can only be connected to a multi split system



Are you planning an additional indoor unit later on? Just **decide now** for an outdoor unit with higher capacity and simply **connect it later**.

Lower power consumption, high efficiency



Our big compressors can work more efficiently than various smaller ones with the same capacity in sum. Also save a significant proportion of energy thanks to standby mode.



Quality

Innovation and quality have always been keystones of Daikin philosophy. We strongly believe that by offering the best products, we can maintain our success. Daikin's quality is continuously reinforced by the intensive training of our sales network and improvements in our products and production processes. Quality begins at the design phase. Manufacturing our own compressors, refrigerants, and other major components allows us to design quality control into our products from the beginning.

Stand By Me, my climate of security

With your customer's new Daikin installation and Stand By Me service programme, you can rest assured they are benefiting from the best comfort, energy efficiency, usability and service available on the market.



Free warranty
extension



FREE



Quick follow-up by Daikin
service partners



Extended warranty
on parts

The first advantage of **Stand By Me** is a free warranty extension:

- applies to both labour and parts
- begins immediately after registration

Daikin service partners are automatically notified when a customer registers their installation on www.standbyme.daikin.eu and needs maintenance.

Your customer is guaranteed:

- quick and reliable service
- management of all information related to their installation such as, registration documents, attendance records, maintenance records, etc.
- immediate access to the correct information contributes to flawless service

For a small fee, customers can extend the warranty on specific parts. **Stand By Me** guarantees:

- that each component is replaced quickly
- helps avoid financial surprises
- long life and smooth operation and all other benefits of a Daikin installation
- reliable service from official Daikin service partners


Daikin service partners work exclusively with Daikin parts and have all of the necessary technical knowledge to solve any issue that may arise

Register
your Daikin unit:
www.standbyme.daikin.eu



The screenshots show the Daikin Stand By Me website interface. The top banner features a smiling couple and the text 'Comfort in your house'. Below it, there are sections for 'Dakin customer?' (with options for additional warranty, service, and contact), 'Dakin Professional?' (with a link to register), and 'DAIKIN OFFERS YOU' (with a link to learn more). The middle section is titled 'Extended warranty' with a sub-section 'What are the advantages?'. The bottom section is titled 'Why register?' with a list of benefits (extended warranty, service, and maintenance plan). It also includes fields for entering a product serial number or model and a contact form.

Installer service

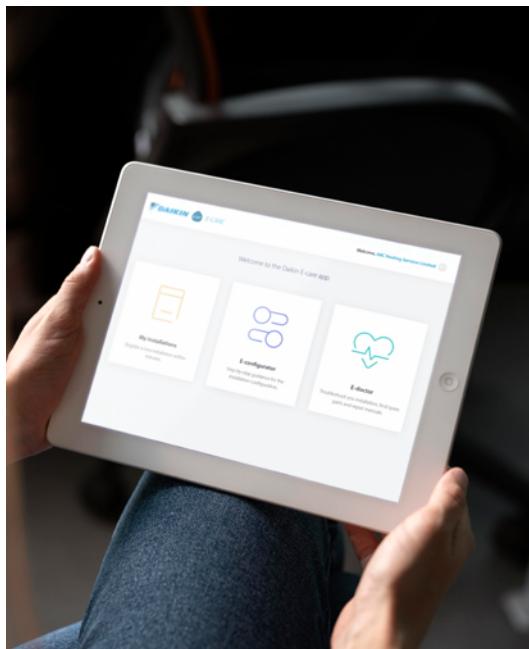

E-Care app



The Daikin e-Care app wants to make the life of a Daikin installer easier by offering Stand By Me registrations via QR code scanning, easy configuration of your heating installation and trouble-shooting via the e-Doctor part.

NEW

Order your **spareparts** directly via the e-Care app, update the settings of your installation with a **Wifi USB** stick and avoid any possible mistake during commissioning of your installation thanks to the easy guidance of the **Commissioning Assistant**.




GET IT ON
Google Play



Available on the
App Store



Multi Split selection software

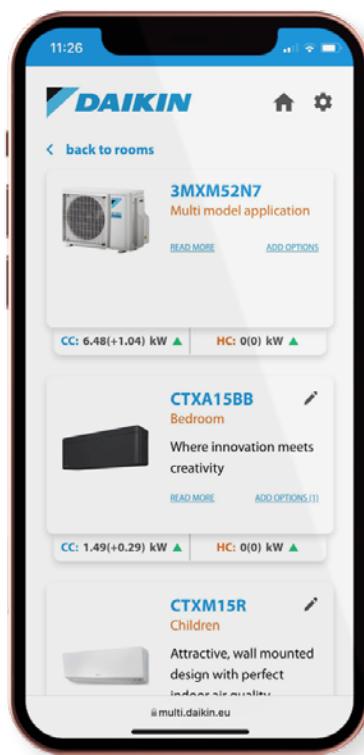

Make an accurate selection of your Daikin Multi Split system in a few steps!

Easy web-based selection tool for our multi split range. It allows to choose the most designated system for each customer's individual needs.

- 1 Sign in with your Daikin ID
- 2 Create a new project or choose one of your previously created projects
- 3 Enter your project details
- 4 Enter the building details
- 5 Add rooms
- 6 The best solution is proposed



Go to multi.daikin.eu
and watch the instruction video





Daikin 3D app for end-users

Daikin 3D app is the application that allows you to choose the air conditioning and watch it at home BEFORE you buy it!

With the Daikin 3D app you can **virtually place** an air conditioner in your own interior.

Switch on the device, get close, look from every angle, add dimensions and take a photo so that you can easily compare all the different Daikin options.

The image shows a hand holding a white smartphone displaying the Daikin 3D app. The app's interface includes a navigation bar with icons for 'DESCRIPTION', 'SPECIFICATIONS', and 'AUGMENTED REALITY'. Below the navigation bar, there's a section for 'SIZE' with buttons for 20, 25, 35, 42, and 50. A central image shows a virtual air conditioner unit with a touch interaction icon. At the bottom of the app screen, there are four categories: 'Ururu Sarara', 'Stylish', 'Daikin Emura', and 'Perfe...'. To the right of the phone, there are two QR codes: one for the App Store and one for Google Play, with a blue hand icon pointing towards the Google Play QR code.

Product range
Choose the desired device

Product detail
Consult the technical data sheets and find additional information

3D visualisation
Customize the size, colour, rotate and move the air conditioning to your liking



Best comfort through intelligent sensors and airflow techniques



Low sound

Our indoor units are almost inaudible to hear with sound levels down to 19dBA thanks to high-end airflow techniques and in-house developed fans.



Intelligent thermal sensor

Stylish FTXA uses an intelligent thermal sensor to detect the surface temperature of a room to create a more comfortable climate by directing the airflow that requires cooling or heating.




2-area motion detection sensor

Air flow is sent to a zone other than where the person is located at that moment. If no people are detected, the unit will automatically switch over to the energy efficient setting.



3-D air flow

Combines vertical and horizontal auto-swing to circulate a stream of warm or cool air right to the corners of even large spaces.



Fireplace logic

When installed close to a heating device (e.g. fireplace or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house (Applicable for optimised heating FTXTM-R and FTXTA-BW/BB)

NEW In addition, a special software is developed on a range of outdoor units* to lower the sound level if required by legislation. For more information, please contact your local sales office.

* RXM20-35R9, RXA20-35A9, RXJ20-35A, 2MXM40-50A, 3MXM40-52A, 2AMXM40-50A



Iconic and award winning designs

Our Stylish and Ururu Sarara have earned several awards for their innovative look and functional capabilities.



reddot design award
winner 2013



White FTXA-AW



Silver FTXA-BS



GOOD
DESIGN



iF
DESIGN
AWARD
2018



Blackwood FTXA-BT



Black FTXA-BB



reddot award 2018
winner



Full Split R-32 product range



Full **R-32** indoor unit range for average and cold outdoor temperatures

BLUEVOLUTION

		Model	Product name	15	20	25	30	35	40	42	50	60	71
Standard range	Wall mounted	Ururu Sarara Complete climate control with (de)humidification, air purification & ventilation with top efficiencies in heating & cooling	FTXZ-N				A+++ (pair only)	A+++ (pair only)			A+++ (pair only)		
		Daikin Emura Design that speaks for itself	FTXJ-AW/S/B			A+++ (pair only)	A+++ (pair only)	A+++ (pair only)		A++ (pair only)	A++ (pair only)		
		Stylish Most compact design wall mounted unit	CTXA-AW/BS/BT/BB		● (multi only)								
		Perfera Wall mounted unit design for high performance and high indoor air quality	FTXM-R		● (multi only)		A+++ (pair only)	A+++ (pair only)	A+++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)
		Comfora Discreet wall mounted unit providing high efficiency and comfort	FTXP-M9			A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)		A++ (pair only)	A++ (pair only)	A++ (pair only)
		Sensira Wall mounted unit for low energy consumption and pleasant comfort	FTXF-D			A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)
		Sensira Wall mounted unit, offering good value for money and ensuring a steady supply of clean air	FTXC-C			A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)		A++ (pair only)	A++ (pair only)	A++ (pair only)
		Sensira Wall mounted unit, offering good value for money	FTXQ-A			A++ (pair only)	A++ (pair only)						
	Floor standing	Floor standing unit Design floor standing unit for optimal heating comfort thanks to unique heating features	CVXM-A		● (multi only)								
		Floor standing unit Floor standing unit for optimal heating comfort thanks to dual airflow	FVXM-A			A++ (pair only)	A++ (pair only)				A++ (pair only)		
Siesta range	Wall mounted	Concealed ceiling unit Compact concealed ceiling unit, with a height of only 200mm	FDXM-F9			A++ (pair only)	A++ (pair only)				A* (pair only)	A* (pair only)	
		Siesta wall mounted unit Discreet, modern design for optimal efficiency and comfort thanks to 2 area motion detection sensor	ATXM-R		● (multi only)	A++ (pair only)	A++ (pair only)				A++ (pair only)		
		Siesta wall mounted unit Discreet Siesta wall mounted unit providing high efficiency and comfort	ATXP-M			A++ (pair only)	A++ (pair only)				A++ (pair only)		
		Siesta wall mounted unit Wall mounted unit for low energy consumption and pleasant comfort	ATXF-D/A			A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)
		Siesta wall mounted unit Wall mounted unit, offering good value for money and ensuring a steady supply of clean air	ATXC-C			A++ (pair only)	A++ (pair only)	A++ (pair only)	A++ (pair only)		A++ (pair only)	A++ (pair only)	A++ (pair only)
		Siesta wall mounted unit Wall mounted unit, offering good value for money	ATXQ-A			A++ (pair only)	A++ (pair only)						
		Stylish Most compact design wall mounted unit, even at ambient temperatures down to -25°C	FTXTA-BW/BB				A++ (pair only)						
Optimised heating range	Wall mounted	Perfera Attractive, wall mounted design with perfect indoor air quality	FTXTM-R				A++ (pair only)			A++ (pair only)			
		Comfora Discreet wall mounted unit providing high efficiency and comfort	FTXTP-M				A++ (pair only)			A++ (pair only)			
		Floor standing unit Design floor standing unit for optimal heating comfort thanks to unique heating features	FVXM-A				A++ (pair only)			A++ (pair only)			
		Siesta wall mounted unit Discreet wall mounted unit providing high efficiency and comfort	ATXTP-M				A++ (pair only)			A++ (pair only)			

Energy efficiency class in cooling and heating (average climate)



Full R-32 pair and multi outdoor unit range

Flexible configurations work in all homes
Whether you are looking for a single room solution or a system for your entire home, we can accommodate your needs.

Pair split or multi split combination – the direct system comparison



Conventional pair split installation
for air-conditioning three rooms

Solution for the same situation with
only one multi split outdoor unit

Model	Product name	20	25	30	35	40	42	50	52	60	68	71	80	90
	RXZ-N			●		●		●						
	RXA-A9/B	●	●			●		●	●					
	RXJ-A	●	●			●		●	●					
	RXM-R(9)	●	●			●		●	●		●		●	
Standard range	RXP-M(9)	●	●			●			●		●		●	
	RXF-D	●	●			●		●	●		●		●	
	RXC-C	●	●			●			●		●		●	
	RXQ-A			●		●								
	2-port MXM-A						●		●					● new capacity
	3-port MXM-A							●		●			●	
	4-port MXM-A									●			●	
	5-port MXM-A													●
Multi heat pump	2-port MXF-A					●		●						
	3-port MXF-A9									●			●	
	4-port MWXM-A									●				
	ARXM-R(9)			●		●			●					
	ARXP-M	●	●			●								
Pair heat pump	ARXF-D/A	●	●			●		●	●					
	ARXC-C	●	●			●			●		●		●	
	ARXQ-A			●		●								
	2-port AMXM-M9						●		●					
	3-port AMXM-N9							●		●				
Siesta range	2-port AMXF-A						●		●					
	3-port AMXF-A9									●				
	RXTA-B					●								
	RXTM-R						(pair only)		(pair only)					
	RXTP-R					(pair only)		(pair only)						
Optimised heating range	ARXTP-R					(pair only)		(pair only)						

Pair heat pump down -25°C

Benefits overview

Split

BLUEEVOLUTION

R-32

Standard range

	Wall mounted										Concealed ceiling
	NEW			UPDATE			NEW				
	FTXZ-N	C/FTXA-AW/BS/ BT/BB	FTXJ-AW/S/B	C/FTXM-R	FTXP-M(9)	FTXF-D	CTXF-C / FTXF-B	FTXC-C	FTXQ-A	FDXM-F9	
	Econo mode
	2-area motion detection sensor			.	.						
	3-area motion detection sensor	.									.
	Energy saving during operation standby
	Home leave operation										.
	Night set mode	
	Fan only
	Auto cleaning filter	.								*	
	Comfort mode
	Powerful mode
	Auto cooling-heating changeover
	Whisper quiet (down to 19dBA)				
	Practically inaudible				
	Indoor unit silent operation
	Comfortable sleeping mode	.								.	
	Outdoor unit silent operation	
	Fire place logic										
	Heat boost				.						
	Heat plus										
	Floor warming										
	3-D Air flow				
	Vertical auto swing
	Horizontal auto swing
	Auto fan speed
	Fan speed steps	5	5	5	5	5	3	3	5	5	3
	Intelligent thermal sensor										
	Coanda Effect	(cooling only)	(cooling and heating)								
	Ururu - humidification	.									
	Sarara - dehumidification	.									
	Dry programme	
	Flash Streamer**	.	.								
	Titanium apatite deodorising filter	
	Silver allergen removal and air purifying filter										
	Air filter
	Onecta app	*	*	*	*	*	*
	Weekly timer	
	24 Hour timer
	Infrared remote control
	Wired remote control		*	*	*	*					*
	Centralised remote control
	Multi zoning										.
	Auto-restart
	Self-diagnosis
	Multi model application		.	.	.		20,25,35 class		20,25,35 class		
	Guaranteed operation down to -25°C										.

* Available as option

** The Flash Streamer technology is not meant to be used for medical purposes

Floor standing		Siesta range						Optimised heating range						
		Siesta Wall mounted UPDATE				NEW		Wall mounted			Floor standing	Siesta Wall mounted UPDATE		
								ATXM-R	ATXP-M	ATXF-D/A	ATXC-C	ATXQ-A	FTXTA-BW/BB	FTXTM-R
C/FVXM-A	FVXM-F												FVXM-A	ATXTP-M
•	•	•	•	•	•			•	•	•	•	•	•	•
•		•								•				
•		•	•	•	•			•	•	•	•	•	•	•
•		•	•	•	•			•	•	•	•	•	•	•
•		•	•	•	•			•	•	•	•	•	•	•
				•	•			•	•	•	•	•	•	•
				•	•			•	•	•	•	•	•	•
				•	•			•	•	•	•	•	•	•
					•			•	•	•	•	•	•	•
					•			•	•	•	•	•	•	•
							•							
								•	•	•	•	•	•	•
								•	•	•	•	•	•	•
								•	•	•	•	•	•	•
									•	•	•	•	•	•
									•	•	•	•	•	•
										•	•	•	•	•
5	5	5	5	3	5	5	5	5	5	5	5	5	5	5
(2 and 3 port)					20,25,35 class		20,25,35 class (ATXF-A only)							

The best of the best




Why choose Ururu Sarara?

The Daikin Ururu Sarara brings a new level of sophisticated control to air conditioning. It has five air treatment techniques which together provide a total comfort solution. In addition, the Ururu Sarara range has SEER and SCOP A+++ ratings thanks to its energy efficient compressor and heat exchanger. Because of its innovative technology, as well as its design, it won the prestigious Red Dot design award in 2013.

5 air treatment techniques

- › Heating and cooling in one unit, for year-round comfort with the highest energy label available
- › In winter, the Ururu function replenishes the moisture in the air to maintain a comfortable feel without unnecessary heating
- › In summer, the Sarara function removes excess moisture while maintaining an even temperature thus eliminating the need for extra cooling
- › Ventilation for fresh air even with closed windows
- › Air purification and automatic filter cleaning to remove allergens to supply clean air

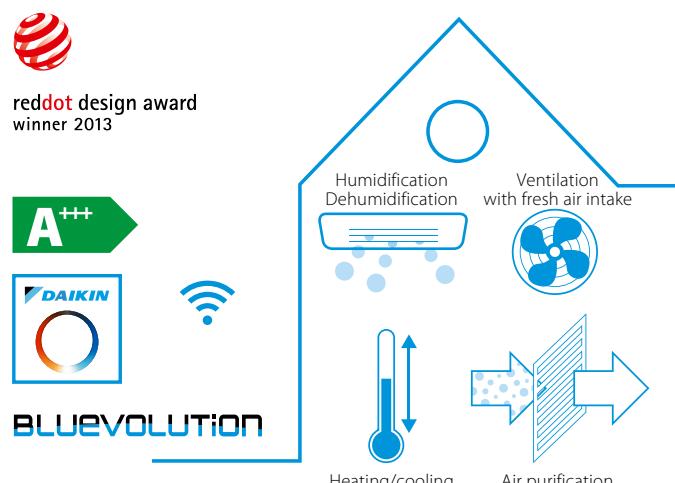

Wall mounted unit

Complete climate control with (de) humidification, air purification & ventilation with top efficiencies in heating & cooling

- › Unique combination of humidification, dehumidification, ventilation, air purification and heating & cooling in 1 system
- › 3 area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment. Detection is done in 3 directions: left, front and right. If no people are detected, the unit will automatically switch over to the energy-efficient setting
- › No need to clean filters, thanks to the self cleaning filter
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › Seasonal efficiency values: full range A+++ in cooling and heating
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › Reddot design award winner 2013



More details and final information can be found by scanning or clicking the QR codes.



FTXZ-N



RXZ-N

	FTXZ + RXZ	25N + 25N	35N + 35N	50N + 50N
Cooling capacity	Min./Nom./Max. kW	0.6/2.5/3.9	0.6/3.5/5.3	0.6/5.0/5.8
Heating capacity	Min./Nom./Max. kW	0.6/3.6/7.5	0.6/5.0/9.0	0.6/6.3/9.4
Power input	Cooling Min./Nom./Max. kW Heating Min./Nom./Max. kW	0.11/0.41/0.88 0.10/0.62/2.01	0.11/0.66/1.33 0.10/1.00/2.53	0.11/1.10/1.60 0.10/1.41/2.64
Space cooling	Energy efficiency class Capacity Pdesign kW SEER Annual energy consumption kWh/a	2.50 9.54 92	3.50 9.00 136	5.00 8.60 203
Space heating (Average climate)	Energy efficiency class Capacity Pdesign kW SCOP/A Annual energy consumption kWh/a	3.50 5.90 831	4.50 5.73 1,100	5.60 5.50 1,427
Nominal efficiency	EER COP Annual energy consumption kWh Energy labeling Directive Cooling/Heating	6.10 5.80 205	5.30 5.00 330	4.55 4.47 550
			A/A	

	FTXZ	25N	35N	50N
Dimensions	Unit HeightxWidthxDepth mm		295x798x372	
Weight	Unit kg		15	
Air filter	Type		Auto cleaning filter	
Fan	Air flow rate Cooling Heating	Silent operation/Low/High m³/min 4.0/5.3/10.7 4.8/6.7/11.7	4.0/5.6/12.1 4.8/6.9/13.3	4.6/6.6/15.0 5.9/7.7/14.4
Sound power level	Cooling Heating	dBA 54 56	57 57	60 59
Sound pressure level	Cooling Heating	Silent operation/Low/Nom./High dBA 19/26/33/38 19/28/35/39	19/27/35/42 19/29/36/42	23/30/38/47 24/31/38/44
Control systems	Infrared remote control		ARC477A1	
Power supply	Phase/Frequency/Voltage	Hz/V	1~50/220-240	

	RXZ	25N	35N	50N
Dimensions	Unit HeightxWidthxDepth mm		693x795x300	
Weight	Unit kg		50	
Sound power level	Cooling Heating	dBA 59 59	61 61	63 64
Sound pressure level	Cooling Heating	High dBA 46 46	48 48	49 50
Operation range	Cooling Heating	Ambient Min.~Max. °CDB Ambient Min.~Max. °CWB	-10~43 -20~18	
Refrigerant	Type GWP Charge kg/TCO2Eq		R-32 675 1.34/0.9	
Piping connections	Liquid OD mm Gas OD mm Piping length OU - IU Max. m Level difference IU - OU Max. m		6.35 9.5 10 8	
Power supply	Phase/Frequency/Voltage Hz/V		1~50/220-240	
Current - 50Hz	Maximum fuse amps (MFA) A		16	

Daikin Emura

Design that speaks for itself



Why choose Daikin Emura?

- › Ultimate comfort, designed with the highest **quality** in mind ... Its design speaks for itself: Daikin Emura pleases the eye and has a strong focus on comfort and user experience to improve your well-being at home.
- › When you choose Daikin technology, you can count on year-round **comfort, energy efficiency, reliability and control**.

High energy efficiency

Seasonal efficiency gives a more realistic indication on how efficient air conditioners operate over an entire heating or cooling season. The label includes multiple classifications from A+++ to G. Daikin Emura achieves high energy efficiencies:

- › SEER up to **A++**
- › SCOP up to **A++**

Benefits

- Almost inaudible with sound levels down to 19 dBA
- 3D airflow
- Intelligent thermal sensor
- Heat boost
- Weekly timer
- Onecta app: always in control no matter where you are, including voice control
- Connectable to pair, multi and VRV



Unique design

Silver, matt white and matt black, these are the three monochrome colours in which the Daikin Emura air conditioner is available.



The front panel of the remote control matches the colours of the indoor unit – the casing is anthracite grey to create a floating effect.



The outdoor unit comes in ivory white.



Comfort

Intelligent thermal sensor

Daikin Emura uses an intelligent thermal sensor to detect a room's current temperature. After determining the room temperature, the intelligent thermal sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm and cool air to areas that need it.

3D airflow

Combines vertical and horizontal auto-swing to circulate a stream of warm or cool air right to the corners of even large spaces.

Inaudible to hear

Daikin Emura is almost inaudible with sound levels down to 19 dBA.

Coanda effect

By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

Heat boost

Daikin Emura quickly heats the room when starting up, ensuring the set temperature is reached faster.

Wall mounted unit

Design that speaks for itself

- › Remarkable blend of iconic design and engineering excellence with an elegant finish in matt crystal white, silver and black
- › The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- › The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular airconditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc.
- › Onecta app: control your indoor from any location with an app, via your local network or internet
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!

More details and final information can be found by scanning or clicking the QR codes.



FTXJ-AW



FTXJ-AS



FTXJ-AB



RXJ-A



- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Seasonal efficiency values up to A+++ in cooling and heating

Efficiency data		FTXJ/RXJ	20AW/S/B + 20A	25AW/S/B + 25A	35AW/S/B + 35A	42AW/S/B + 42A	50AW/S/B + 50A
Cooling capacity	Min./Nom./Max.	kW	1.3/2.0/2.6	1.3/2.5/3.2	1.4/3.4/4.0	1.7/4.2/5.0	1.7/5.0/5.3
Heating capacity	Min./Nom./Max.	kW	1.3/2.5/3.5	1.3/2.8/4.7	1.4/4.0/5.2	1.7/5.4/6.0	1.7/5.8/6.5
Power input	Cooling Nom.	kW	0.43	0.56	0.78	1.05	1.36
	Heating Nom.	kW	0.50	0.56	0.99	1.31	1.45
Space cooling	Energy efficiency class		A+++			A++	
	Capacity Pdesign	kW	2	2.5	3.4	4.2	5
	SEER		8.75	8.74	8.73	7.5	7.33
	Annual energy consumption	kWh/a	80	100	136	196	239
Space heating (Average climate)	Energy efficiency class		A++			A++	
	Capacity Pdesign	kW	2.02	2.07	2.11	3.26	3.44
	SCOP		5.15	5.15	5.15	4.6	4.6
	Annual energy consumption	kWh/a	652	666	680	1,156	1,218
Nominal efficiency	EER		4.7	4.46	4.37	3.99	3.68
	COP		5	5	4.04	4.12	4
	Annual energy consumption		213	280	389	526	679
	Energy labeling Directive Cooling/Heating				A/A		


Indoor unit		FTXJ	20AW/S/B	25AW/S/B	35AW/S/B	42AW/S/B	50AW/S/B
Dimensions	Unit HeightxWidthxDepth	mm			305x900x212		
Weight	Unit	kg			12		
Air filter	Type				Removable / washable		
Fan	Air flow rate	Cooling m³/min	4.6/6.0/8.4/11.0	4.6/6.0/8.6/11.4	4.6/6.0/8.6/11.8	4.6/7.2/9.5/13	5.2/7.6/10.4/13.5
		Heating m³/min	4.6/6.4/8.7/11.1	4.6/6.4/9.0/11.3	4.6/6.4/9.0/11.7	5.2/7.7/10.5/14.4	5.7/8.2/11.1/15.0
Sound power level	Cooling	dBA	57	57	60	60	60
	Heating	dBA	-	-	-	-	-
Sound pressure level	Cooling	Silent operation/Low/High	19/25/39	19/25/40	19/25/41	21/29/45	24/31/46
	Heating	Silent operation/Low/High	19/25/39	19/25/40	19/25/41	21/29/45	24/33/46
Control systems	Infrared remote control		ARC488A1W/S/K				

* +2 dBA in Multi combination

Outdoor unit		RXJ	20A	25A	35A	42A	50A
Dimensions	Unit HeightxWidthxDepth	mm			552x840x350		
Weight	Unit	kg			734x954x408		
Sound power level	Cooling Nom.	dBA	59	59	61	62	62
	Heating Nom.	dBA	59	59	61	62	62
Sound pressure level	Cooling Nom.	dBA	46	46	49	48	48
	Heating Nom.	dBA	47	47	49	48	49
Operation range	Cooling Ambient Min.~Max.	°CDB	-10~50				
	Heating Ambient Min.~Max.	°CWB	-20~24				
Refrigerant	Type/GWP		R-32/675.0				
	Charge kg/TCO2Eq		0.76/0.52				
Piping connections	Liquid/Gas OD mm		6.35/9.50				
	Piping length OU - IU Max. m		20				
	Additional refrigerant charge kg/m		0.02 (for piping length exceeding 10m)				
	Level difference IU - OU Max. m		15				
Power supply	Phase/Frequency/Voltage Hz/V		1~/50 /220-240				
Current - 50Hz	Maximum fuse amps (MFA) A	10	13				

Contains fluorinated greenhouse gases




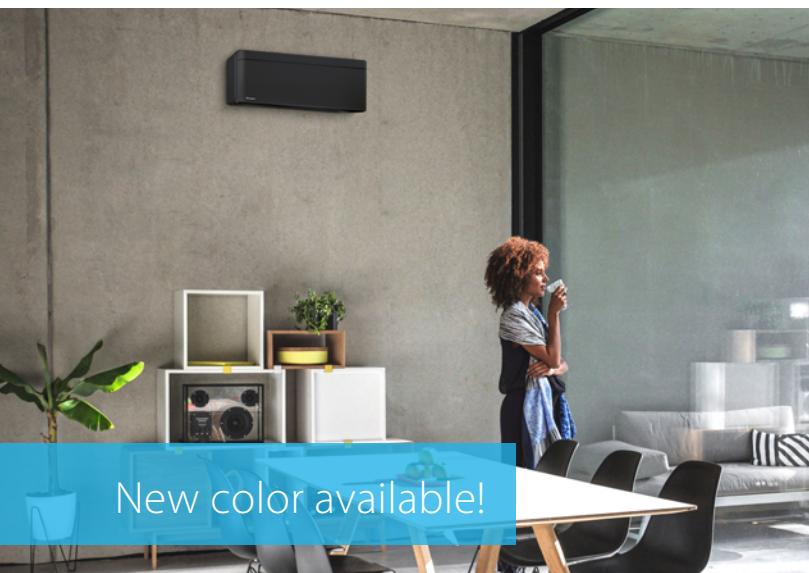


Stylish where innovation meets creativity



White FTXA-AW

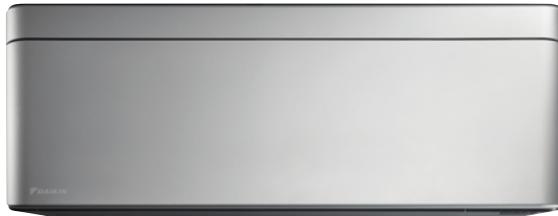

Silver FTXA-BS

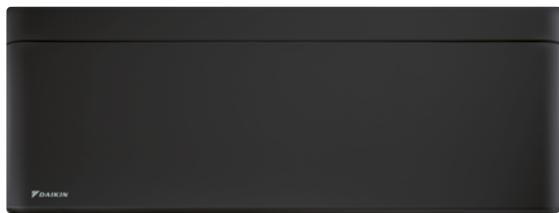

Black FTXA-BB



Blackwood FTXA-BT

up to
A+++
in heating & cooling

Available in 4 colours

- › Users can choose from **four distinct colours** (white, silver, black and blackwood)
- › **Curved corners** create an unobtrusive and space-saving design
- › **Thin dimensions** make it the most compact design unit on the market
- › Simple panel enables variation in texture and colour to easily blend into any room
- › Award winning design: Stylish earned the Reddot award, the Good Design Award and iF award for its innovative look and functional capabilities








GOOD DESIGN AWARD 2017

The Coanda effect

Already present in the Ururu Sarara, the **Coanda effect** optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

The Coanda effect creates two different airflow patterns depending on whether Stylish is in cooling or heating mode. On the top is the Coanda effect in cooling mode (ceiling airflow), while the bottom images demonstrate the Coanda effect in heating mode (vertical airflow).

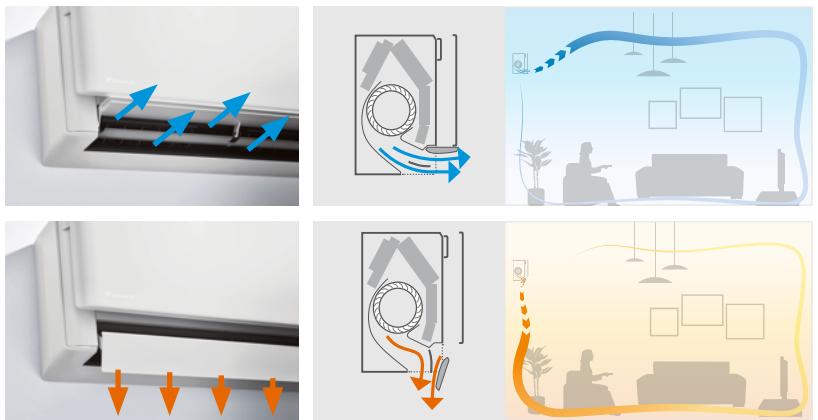

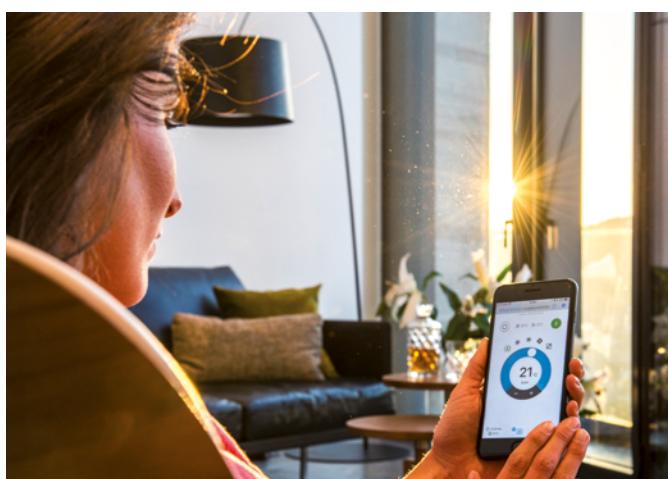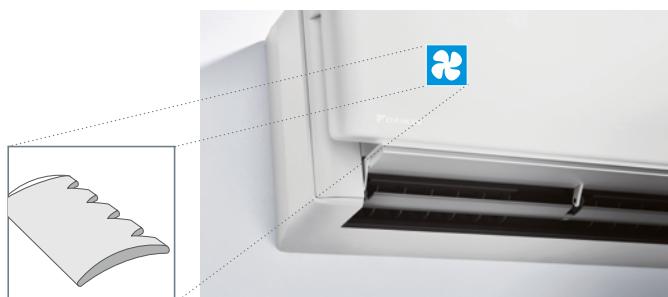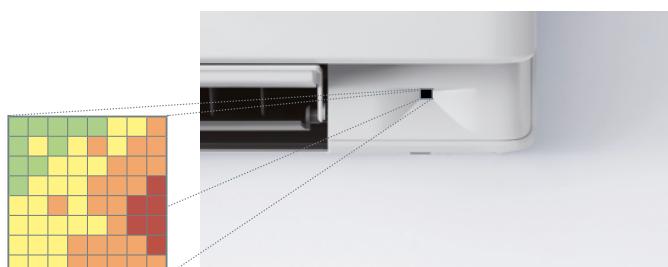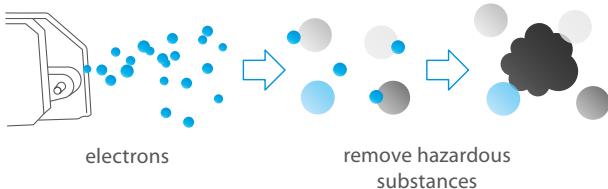

Air quality

Flash streamer: using electrons to trigger chemical reactions with airborne particles, the Flash Streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing better, cleaner air.

Intelligent thermal sensor

Stylish uses an **intelligent thermal sensor** to detect the surface temperature of a room to create a more comfortable climate. After determining the current room temperature, the grid eye sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it.

Quiet operation

Stylish uses a **specially designed fan** to optimise airflow for higher energy efficiency at low sound levels. To achieve higher energy efficiency, Daikin designed a fan that runs efficiently within Stylish's compact dimensions. Together, the fan and heat exchanger attain top energy performance but operate at a sound level that is practically inaudible to occupants.

Onecta app

Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!

Your benefits

- › Access to various features for controlling your internal climate
- › Manage the temperature, operating mode, air purification and fans with the interactive thermostat
- › Create different operating schedules and modes
- › Monitor energy consumption

Wall mounted unit

Where innovation meets creativity

- › A compact and functional design suitable for all interiors in a white, black, silver and blackwood coloured elegant finish
- › The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- › The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- › Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



› Seasonal efficiency values up to A+++ in cooling and heating



CTXA-AW



CTXA-BB



CTXA-BT



CTXA-BS



RXA-A9



FTXA-AW



FTXA-BB



FTXA-BT



FTXA-BS



RXA-B

More details and final information can be found by scanning or clicking the QR codes.

	FTXA + RXA	CTXA15AW/BS/BT/BB	20AW/BS/BT/BB + 20A9	25AW/BS/BT/BB + 25A9	35AW/BS/BT/BB + 35A9	42AW/BS/BT/BB + 42B	50AW/BS/BT/BB + 50B
Cooling capacity	Min./Nom./Max.	kW	1.30/2.00/2.60	1.30/2.50/3.20	1.40/3.40/4.00	1.70/4.20/5.00	1.70/5.00/5.30
Heating capacity	Min./Nom./Max.	kW	1.30/2.50/3.50	1.30/2.80/4.70	1.40/4.00/5.20	1.70/5.40/6.00	1.70/5.80/6.50
Power input	Cooling	Min./Nom./Max.	kW	0.27/0.43/0.63	0.27/0.56/0.78	0.31/0.78/1.04	-/1.05/-
	Heating	Min./Nom./Max.	kW	0.25/0.50/0.91	0.25/0.56/1.22	0.26/0.99/1.67	-/1.31/-
Space cooling	Energy efficiency class		A+++			A+++	
	Capacity	Pdesign	kW	2.00	2.50	3.40	4.20
	SEER			8.75	8.74	8.73	7.50
	Annual energy consumption		kWh/a	80	100	136	196
Space heating (Average climate)	Energy efficiency class		A+++			A++	
	Capacity	Pdesign	kW	2.40	2.45	2.50	3.80
	SCOP/A				5.15		4.60
	Annual energy consumption		kWh/a	653	666	680	1,150
Nominal efficiency	EER			4.70	4.46	4.37	3.99
	COP				5.00	4.04	4.12
	Annual energy consumption		kWh		-		526
	Energy labeling Directive Cooling/Heating						679
						A/A	

Indoor unit	FTXA	CTXA15AW/BS/BT/BB	20AW/BS/BT/BB	25AW/BS/BT/BB	35AW/BS/BT/BB	42AW/BS/BT/BB	50AW/BS/BT/BB
Dimensions	Unit	HeightxWidthxDepth	mm	295x798x189			
Weight	Unit		kg	11.5			
Air filter	Type			Removable / washable			
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m³/min	4.6/6.1/8.2/11.0	4.6/6.1/8.6/11.5	4.6/6.1/8.6/11.9
		Heating	Silent operation/Low/Medium/High	m³/min	4.5/6.4/8.7/10.9	4.5/6.4/9.0/11.1	4.5/6.4/9.0/11.5
Sound power level	Cooling			57		60	
Sound pressure level	Cooling	Silent operation/Low/High	dBA	21/25/39	19/25/39	19/25/40	21/29/45
	Heating	Silent operation/Low/High	dBA	21/25/39	19/25/39	19/25/40	21/29/45
Control systems	Infrared remote control						24/33/46
						ARC466A58	

Outdoor unit	RXA	20A9	25A9	35A9	42B	50B
Dimensions	Unit	HeightxWidthxDepth	mm	550x840x350		734x870x373
Weight	Unit		kg	32		50
Sound power level	Cooling	Nom.	dBA	59.0	61.0	62.0
	Heating	Nom.	dBA	59.0	61.0	62.0
Sound pressure level	Cooling	Nom.	dBA	46.0	49.0	48.0
	Heating	Nom.	dBA	47.0	49.0	48.0
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46	
	Heating	Ambient	Min. - Max.	°CDB	-15-24	-15~18
Refrigerant	Type/GWP			R-32/675.0		
	Charge		kg/TCO2Eq	0.76/0.52		1.10/0.75
Piping connections	Liquid/Gas OD		mm	6.35/9.50		6.35/12.7
	Piping length OU - IU	Max.	m	20		30
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)		
	Level difference IU - OU	Max.	m	15.0		20
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	10	13	

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawing for electrical data | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m.





The perfect
solution
for a comfortable home

Perfera wall mounted unit

makes cool living and working a breeze

Whatever the weather's doing outside, inside you want optimum comfort throughout the day. Like a cool summer breeze, Perfera instinctively knows how to keep the room temperature in your living or working space at the ideal level, so that you and those around you can get on with relaxing, enjoying yourselves – and being productive. The stylishly designed front panel, whisper-quiet operation and the perfect circulation of cooled or heated air help make each room the place you – and everyone – always want to be.

Intelligent - Comfortable - Quiet

3-D 3-D Air flow

By pressing the buttons on the remote control, this function combines vertical and horizontal auto-swing to circulate a stream of cool/warm air right to the corners of even large spaces.

Silent operation


Perfera uses a **specially designed fan** that optimises airflow and creates high energy efficiency at low sound levels. For even higher energy efficiency, Daikin has also designed a new fan that fits snugly into Perfera's compact dimensions.

Together, the fan and heat exchanger produce top energy performance, yet operate at a sound level that is practically inaudible. Shhh!



2-area motion detection sensor

Air flow is sent to a zone other than where the person is located at that moment. If no people are detected, the unit will automatically switch over to the energy efficient setting.

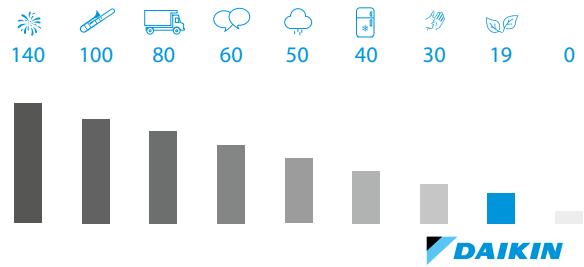




Air quality

Flash streamer/ titanium apatite deodorising filter


Flash streamer: using electrons to trigger chemical reactions with airborne particles, the Flash Streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing better, cleaner air.

And the titanium apatite deodorising filter works hard to combat smells such as tobacco smoke and pets.

FLASH STREAMER

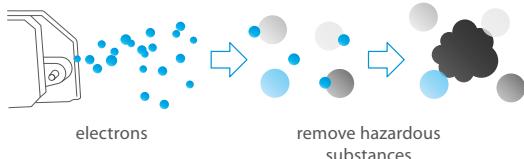

TITANIUM APATITE DEODORISING FILTER

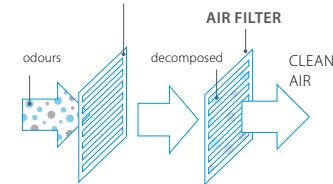

Silver allergen removal filter

The Silver allergen removal and air purifying filter is your solution, because it captures allergens such as pollen to ensure a steady supply of clean air.

Energy efficiency

The enhanced design of the Perfera boosts energy efficiency even further compared with previous models. It boasts a seasonal energy efficiency ratio (SEER) of up to 8.65 and a seasonal coefficient of performance (SCOP) of up to 5.10. This gives the Perfera **best-in-class performance**, with seasonal efficiency values up to A+++ in cooling and heating resulting in low running costs.

The Perfera is an energy-saving winner from every angle.

up to

A+++

in cooling

up to

A+++

in heating



Heat boost

Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster* than a regular air conditioner (pair only).

*Heat Plus test condition: 50 class, outdoor temperature 2°C - Indoor temperature 10°C, R/C setting: 23°C

set the living room temperature to 21 degrees



Alright, setting the Living room to 21 degrees.



Intuitive online and voice control

NEW Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!

amazon alexa

works with the
Google Assistant

Wall mounted unit

Attractive, wall mounted design with perfect indoor air quality

- › Seasonal efficiency values up to A+++ in cooling and heating
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Quiet operation: down to 19dBA sound pressure level
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › 2-area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting. (larger capacity area)

More details and final information can be found by scanning or clicking the QR codes.



CTXM-R



FTXM-R



RXM-R



RXM-R9



Efficiency data		FTXM + RXM	CTXM15R	20R + 20R9	25R + 25R9	35R + 35R9	42R + 42R	50R + 50R	60R + 60R	71R + 71R	
Cooling capacity	Min./Nom./Max.	kW		1.30/2.00/2.60	1.30/2.50/3.20	1.40/3.40/4.00	1.70/4.20/5.00	1.70/5.00/6.00	1.70/6.00/7.00	2.30/7.10/8.50	
Heating capacity	Min./Nom./Max.	kW		1.30/2.50/3.50	1.30/2.80/4.70	1.40/4.00/5.20	1.70/5.40/6.00	1.70/5.80/7.70	1.70/7.00/8.00	2.30/8.20/10.20	
Power input	Cooling Nom.	kW		0.44	0.56	0.80	0.97	1.36	1.77	2.34	
	Heating Nom.	kW		0.50	0.56	0.99	1.31	1.45	1.94	2.57	
Space cooling	Energy efficiency class			A+++				A++			
	Capacity Pdesign	kW		2.00	2.50	3.40	4.20	5.00	6.00	7.10	
	SEER				8.65		7.85	7.41	6.90	6.20	
	Annual energy consumption	kWh/a		81	101	137	187	236	304	401	
Space heating (Average climate)	Energy efficiency class			A+++			A++		A+		
	Capacity Pdesign	kW		2.30	2.40	2.50	4.00	4.60	4.80	6.20	
	SCOP/A				5.10		4.71		4.30	4.10	
	Annual energy consumption	kWh/a		631	659	686	1,189	1,368	1,562	2,117	
Nominal efficiency	EER			4.57	4.50	4.23	4.33	3.68	3.39	3.03	
	COP				5.00	4.04	4.12	4.00	3.61	3.19	
	Annual energy consumption	kWh		219	278	402	485	679	885	1,172	
	Energy labeling Directive Cooling/Heating						A/A		B/D		
Indoor unit		FTXM	CTXM15R	20R	25R	35R	42R	50R	60R	71R	
Dimensions	Unit	HeightxWidthxDepth	mm		295x778x272				299x998x292		
Weight	Unit		kg		10.0				14.5		
Air filter	Type					Removable/washable					
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m ³ /min	4.3/5.7/7.5/10.5	4.1/5.7/7.6/10.5	4.2/6.0/7.8/11.3	4.3/6.5/9.0/11.9	8.3/11.4/14/15.8	9.1/11.8/14/16.7	10.0/12.2/15/16.9
		Heating	Silent operation/ Low/Medium/High	m ³ /min	5.1/6.2/8.2/9.3	4.9/6.3/8.0/9.8	4.9/6.5/8.5/9.8	4.9/6.5/9.7/12.4	10.5/12.0/14.2/15.8	11.1/12.4/15.2/16.5	11.6/12.7/15.8/17.7
Sound power level	Cooling		dBA		57		58	60	58.0	60.0	
	Heating		dBA		54		60	58.0	59.0	61.0	
Sound pressure level	Cooling	Silent operation/Low/High	dBA		19/25/41		19/29/45	21/30/45	27.0/36.0/44.0	30.0/37.0/46.0	32.0/38.0/47.0
	Heating	Silent operation/Low/High	dBA		20/26/39		20/28/39	21/29/45	31.0/34.0/43.0	33.0/36.0/45.0	34.0/37.0/46.0
Control systems	Infrared remote control					ARC466A67					
Outdoor unit		RXM	CTXM15R	20R9	25R9	35R9	42R	50R	60R	71R	
Dimensions	Unit	HeightxWidthxDepth	mm		552x840x350				734x954x401		
Weight	Unit		kg		32			49.0		55	
Sound power level	Cooling Nom.		dBA		59.0	58.0	61.0		-		
	Heating Nom.		dBA		59.0		61.0		-		
Sound pressure level	Cooling Nom.		dBA		46.0	49.0		48.0		47.0	
	Heating Nom.		dBA		47.0	49.0	48.0	49.0		48.0	
Operation range	Cooling Ambient	Min.~Max.	°CDB		-10~50			-10~50		-10~46	
	Heating Ambient	Min. - Max.	°CDB							-15~24	
Refrigerant	Type/GWP					R-32/675.0					
	Charge	kg/TCO2Eq				0.76/0.52		1.10/0.750		1.15/0.780	
Piping connections	Liquid OD	mm			6.35			6			
	Gas OD	mm				9.50			12.7		15.9
	Piping length	OU - IU Max.	m		20			30			
	System	Chargeless	m				10				
	Additional refrigerant charge	kg/m				0.02 (for piping length exceeding 10m)					
	Level difference	IU - OU Max.	m		15			20.0			
Power supply	Phase/Frequency/Voltage	Hz/V				1~50 / 220-240					
Current - 50Hz	Maximum fuse amps (MFA)	A			10		13		16		20

See separate drawing for operation range | See separate drawing for electrical data | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases | See separate drawings for electrical data

Wall mounted unit

Discreet wall mounted unit providing high efficiency and comfort

- > Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- > Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- > Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- > Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- > 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- > The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Seasonal efficiency values up to A++ in cooling and heating
- > Space saving contemporary wall mounted design

More details and final information can be found by scanning or clicking the QR codes.



- > Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.



FTXP-M



FTXP-M9



RXP-M

Efficiency data		FTXP + RXP	20M9 + 20M	25M9 + 25M	35M9 + 35M	50M + 50M	60M + 60M	71M + 71M
Cooling capacity	Min./Nom./Max.	kW	1.3/2.00/2.6	1.3/2.50/3.0	1.3/3.50/4.0	1.7/5.0/6.0	1.7/6.0/7.0	2.3/7.1/7.3
Heating capacity	Min./Nom./Max.	kW	1.30/2.50/3.50	1.30/3.00/4.00	1.30/4.00/4.80	1.7/6.0/7.7	1.7/7.0/8.0	2.3/8.2/9.0
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.50/0.72	0.31/0.65/0.72	0.29/0.1/1.30	0.320/1.385/1.826	0.332/1.824/2.980
	Heating	Min./Nom./Max.	kW	0.25/0.52/0.95	0.25/0.69/0.95	0.29/1.00/1.29	0.440/1.579/2.356	0.456/1.928/2.787
Space cooling	Energy efficiency class					A**		
	Capacity	Pdesign	kW	2.00	2.50	3.50	5.0	6.0
	SEER			6.79	6.92	6.62	7.30	6.82
	Annual energy consumption		kWh/a	103	126	186	240	308
Space heating (Average climate)	Energy efficiency class			A**			A*	
	Capacity	Pdesign	kW	2.20	2.40	2.80	4.60	4.80
	SCOP/A			4.65	4.61	4.64	4.40	4.10
	Annual energy consumption		kWh/a	662	728	845	1,463	1,638
Nominal efficiency	EER			4.02	3.83	3.49	3.61	3.29
	COP			4.77	4.36	4.02	3.80	3.63
	Annual energy consumption		kWh	249	326	505	693	912
	Energy labeling Directive Cooling/Heating				A/A		-/-	

Indoor unit		FTXP	20M9	25M9	35M9	50M	60M	71M
Dimensions	Unit	HeightxWidthxDepth	mm	286x770x225		295x990x263		
Weight	Unit		kg	8.50		13.5		
Air filter	Type	Removable / washable						
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m ³ /min	4.2/5.6/7.4/9.5	4.2/5.8/7.7/9.7	4.5/6.3/8.3/11.5	8.3/11.5/14.0/16.3
		Heating	Silent operation/ Low/Medium/High	m ³ /min	5.2/6.2/8.1/10.4	5.2/6.4/8.1/10.4	5.3/7.0/9.0/11.5	10.4/11.8/14.4/17.3
Sound power level	Cooling		dBA		55	58	59	60
	Heating		dBA		55	58	61	62
Sound pressure level	Cooling	Silent operation/Low/High	dBA	19/25/39	19/26/40	20/27/43	27/34/43	30/36/45
	Heating	Silent operation/Low/High	dBA	21/28/39	21/28/40	21/29/40	30/38/42	32/40/44
Control systems	Infrared remote control							ARC480A53

Outdoor unit		RXP	20M	25M	35M	50M	60M	71M				
Dimensions	Unit	HeightxWidthxDepth	mm	550x658x275		734x870x373						
Weight	Unit		kg	26		46.0						
Sound power level	Cooling			60		61						
Sound pressure level	Cooling	Nom.	dBA	46	48	47	49	52				
	Heating	Nom.	dBA	47	48		49	52				
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~48							
	Heating	Ambient	Min.~Max.	°CWB	-15~18							
Refrigerant	Type	R-32										
GWP		675.0										
Charge	kg/TCO2Eq	0.55/0.37		0.70/0.48		0.90/0.61		1.15/0.78				
Piping connections	Liquid OD		mm	6.4		6.35						
	Gas OD		mm	9.5		12.7						
	Piping length OU - IU Max.		m	20		30						
	Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 10m)								
	Level difference IU - OU Max.	m		12		20						
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50~/220-240								
Current - 50Hz	Maximum fuse amps (MFA)	A		16		20						

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for electrical data | See separate drawing for operation range | Contains fluorinated greenhouse gases

Wall mounted unit

Wall mounted unit for low energy consumption and pleasant comfort

- > Seasonal efficiency values up to A++ in cooling
- > Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- > Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- > Quiet in operation down to 21 dBA
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



FTXF-D



RXF-D

Efficiency data		FTXF + RXF	20D + 20D	25D + 25D	35D + 35D	42D + 42D	50D + 50D	60D + 60D	71D + 71D		
Cooling capacity	Min./Nom./Max.	kW	1.3/2.00/2.4	1.3/2.50/2.8	1.3/3.30/3.8	1.4/4.20/4.3	1.70/5.00/6.00	1.70/6.00/7.00	2.30/7.10/7.30		
Heating capacity	Min./Nom./Max.	kW	1.30/2.40/3.30	1.30/2.80/3.70	1.30/3.50/4.40	1.40/4.60/5.00	1.70/6.00/7.70	1.70/6.40/8.00	2.30/8.20/9.00		
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.592/0.72	0.31/0.772/1.05	0.31/1.00/1.40	0.31/1.27/1.50	-/1.50/-	-/1.85/-		
	Heating	Min./Nom./Max.	kW	0.25/0.640/0.95	0.25/0.750/1.11	0.25/0.940/1.50	0.25/1.24/1.40	-/1.62/-	-/1.63/-		
Space cooling	Energy efficiency class					A++			A++		
	Capacity	Pdesign	kW	2.00	2.50	3.50	4.20	5.00	6.00		
	SEER				6.50			6.21	6.15		
	Annual energy consumption		kWh/a	108	135	188	226	282	342		
Space heating (Average climate)	Energy efficiency class					A+			A+		
	Capacity	Pdesign	kW	2.20	2.40	2.60	3.30	4.60	4.80		
	SCOP/A				4.11			4.06	3.81		
	Annual energy consumption		kWh/a	749	818	885	1,075	1,585	1,654		
Indoor unit	FTXF	20D	25D	35D	42D	50D	60D	71D			
Dimensions	Unit	HeightxWidthxDepth	mm	286 x 770 x 225				295 x 990 x 263			
Weight	Unit		kg	8.00		8.50	9.00	13.5			
Air filter	Type			Removable / washable							
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.3/6.0/8.9.8	4.3/6.2/8/10.0	4.4/6.4/8/11.5	4.9/6.9/9/12.6	10.5/11.9/14.4/16.8		
		Heating	Silent operation/ Low/Medium/High	m³/min	5.3/6.2/8.3/10.4	5.3/6.4/8.4/10.4	5.3/6.5/8.6/11.9	5.2/6.7/8.8/12.8	10.7/12.2/14.8/17.3		
Sound power level	Cooling			dBA	53.0	54.0	59.0	59	60		
	Heating			dBA		55.0	56.0	59.0	61		
Sound pressure level	Cooling	Silent operation/Low/High		dBA	20.0/25.0/39.0	20.0/26.0/40.0	20.0/27.0/43.0	22.0/30.0/45.0	31/34/43		
	Heating	Silent operation/Low/High		dBA	21.0/28.0/39.0	21.0/28.0/40.0	21.0/29.0/40.0	22.0/28.0/44.0	30/33/42		
Control systems	Infrared remote control				ARC470A1						
	Wired remote control				BRC073A1						
Piping connections	Drain				18						
Outdoor unit	RXF	20D	25D	35D	42D	50D	60D	71D			
Dimensions	Unit	HeightxWidthxDepth	mm	550x658x275				734x870x373			
Weight	Unit		kg	24.0		28.0	46.0	50.0			
Sound power level	Cooling				-						
Sound pressure level	Cooling	Low/Nom./High		dBA	-/-46.0		-/-48.0		-/47/-		
	Heating	Low/Nom./High		dBA	-/-47.0		-/-48.0		-/49/-		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10 ~48						
	Heating	Ambient	Min.~Max.	°CWB	-15 ~18						
Refrigerant	Type				R-32						
	GWP				675.0				675		
	Charge	kg/TCO2Eq			0.450/0.300	0.550/0.370	0.750/0.510	0.90/0.61	1.15/0.78		
Piping connections	Liquid - Gas				---						
	Piping length OU - IU	Max.	m		20		30				
	Piping length				-						
	Level IU - OU	Max. difference	m		12.0		20				
Power supply	Phase/Frequency/Voltage	Hz/V			1~/50 /220-240						
Current - 50Hz	Maximum fuse amps (MFA)	A			16			20			
Sound pressure level Nom.		dBA			-						
Piping connections	Total piping length				-						

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. Data for high efficiency series, Eurovent certified | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. Data for standard efficiency series | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases

Wall mounted unit

Wall mounted unit, offering good value for money

- Flat, stylish front panel blends easily within any interior décor and is easier to clean
- Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- Seasonal efficiency values up to A++ in cooling
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



FTXC-C



RXC-C

Efficiency data		FTXC + RXC	20C + 20C	25C + 25C	35C + 35C	50C + 50C	60C + 60C	71C + 71C			
Cooling capacity	Min./Max.	kW	1.3/3.0		1.3/4.0	1.4/6.2	1.8/7.0	2.3/7.3			
Heating capacity	Min./Max.	kW	1.30/4.00		1.30/4.80	1.36/6.60	1.48/8.00	2.30/9.00			
Space cooling	Energy efficiency class				A**						
	Capacity	Pdesign	kW	2.08	2.57	3.44	5.08	6.21			
	SEER			6.89	6.84	6.87	6.45	6.40			
	Annual energy consumption	kWh/a	106	132	175	276	340	459			
Space heating (Average climate)	Energy efficiency class				A*						
	Capacity	Pdesign	kW	1.87	2.23	2.24	3.90	4.10			
	SCOP/A			4.40	4.45	4.28	4.42	4.24			
	Annual energy consumption	kWh/a	594	700	732	1,236	1,354	2,334			
Indoor unit		FTXC	20C	25C	35C	50C	60C	71C			
Dimensions	Unit	HeightxWidthxDepth	mm	288x770x234			297x990x273				
Weight	Unit		kg	9.00		9.50		13.0			
Air filter	Type			Removable / washable							
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m³/min	5.4/6.5/9/10.8		7.4/8.2/10/12.2	10.2/13.6/16/20.4			
Sound power level	Cooling			dBA	54	55	57	60			
Sound pressure level	Cooling	Silent operation/Low/High		dBA	20/26/38	21/26/39	29/33/45	30/38/46			
Control systems	Infrared remote control			ARC486A2							
Outdoor unit		RXC	20C	25C	35C	50C	60C	71C			
Dimensions	Unit	HeightxWidthxDepth	mm	550x658x273			615x845x300				
Weight	Unit		kg	24.0	26.0		39.0	45.0			
Sound power level	Cooling	Nom.		dBA	58	60	65	66			
Sound pressure level	Cooling	High		dBA	45	46	51	54			
Operation range	Cooling	Ambient	Min.~Max.	°CDB	10~46		-10~46				
	Heating	Ambient	Min.~Max.	°CWB	-15~18						
Refrigerant	Type				R-32						
	GWP				675.0						
	Charge		kg/TCO2Eq		0.550/0.371	0.750/0.506	1.00/0.675	1.10/0.743	1.15/0.776		
Piping connections	Liquid	OD	mm		6.35						
	Gas	OD	mm		9.52						
	Piping length	OU - IU	Max. System	m	20			30			
		Chargeless		m		8					
	Additional refrigerant charge		kg/m		0,017 (for piping length exceeding 7.5m)						
	Level difference	IU - OU Max.	m		15.0			20.0			
Power supply	Phase/Frequency/Voltage		Hz/V		1~50 / 220-240						
Current - 50Hz	Maximum fuse amps (MFA)		A		16						

Wall mounted unit

Wall mounted unit, offering good value for money

- Flat, stylish front panel blends easily within any interior décor and is easier to clean
- Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- Seasonal efficiency values up to A++ in cooling
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



FTXQ-A



RXQ-A


Efficiency data			FTXQ + RXQ	25A + 25A	35A + 35A
Cooling capacity	Min./Nom./Max.	kW	1.30/2.50/3.00	1.30/3.50/3.80	1.30/3.90/4.80
Heating capacity	Min./Nom./Max.	kW	1.30/3.00/3.90	1.30/3.90/4.80	1.30/3.90/4.80
Power input	Cooling	Nom. kW	0.77	1.08	1.05
	Heating	Nom. kW	0.81	1.05	1.05
Space cooling	Energy efficiency class			A**	
	Capacity	Pdesign kW	2.50	3.50	
	SEER		6.22	6.21	
	Annual energy consumption	kWh/a	141	197	
Space heating (Average climate)	Energy efficiency class			A*	
	Capacity	Pdesign kW	2.30	2.40	
	SCOP/A		4.22	4.12	
	Annual energy consumption	kWh/a	764	815	
Nominal efficiency	EER			3.24	
	COP			3.71	
	Annual energy consumption	kWh	386	540	
	Energy labeling Directive	Cooling/Heating		A/A	

Indoor unit			FTXQ	25A	35A
Dimensions	Unit	HeightxWidthxDepth	mm	291 x770 x232	
Weight	Unit		kg	9.00	
Air filter	Type			Removable / washable	
Fan	Air flow rate	Cooling Heating	Silent operation/ Low/Medium/High m³/min	5.0/6.5/8.1/10.2 6.8/8.1/9.6/11.1	6.0/7.0/8.5/10.5 6.9/8.3/10.0/12.0
Sound power level	Cooling		dBA	55	
Sound pressure level	Cooling Heating	Silent operation/Low/High Silent operation/Low/High	dBA	23.0 /26.0 /40.0 25.0 /29.0 /40.0	24.0 /28.0 /41.0 25.0 /30.0 /42.0
Control systems	Infrared remote control			ARC470A1	

Outdoor unit			RXQ	25A	35A
Dimensions	Unit	HeightxWidthxDepth	mm	550x740x337	
Weight	Unit		kg	23.0	25.5
Sound power level	Cooling	Nom.	dBA	61.0	62.0
Sound pressure level	Cooling	High	dBA	47.0	
Operation range	Cooling Heating	Ambient Ambient	Min.~Max. °CDB °CWB	10~46 -15~18	
Refrigerant	Type			R-32	
	GWP			675.0	
	Charge		kg/TCO2Eq	0.500/0.340	0.710/0.480
Piping connections	Liquid Gas	OD OD	mm	6.35	
	Piping length Additional refrigerant charge	OU - IU kg/m	m	9.50 0.02 (for piping length exceeding 10m)	
	Level difference Max.	IU - OU	m	20 12.0	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	16	

Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawings for electrical data



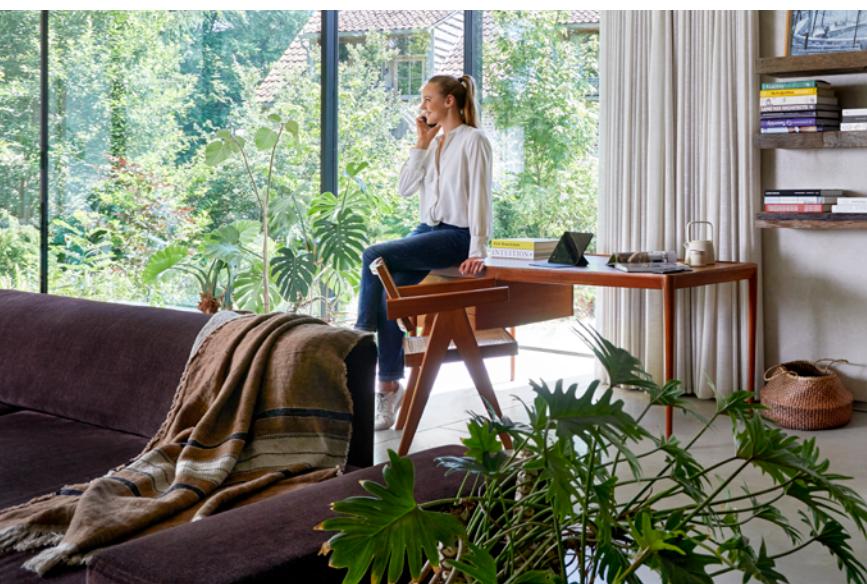

Go with
the heating flow



Perfera floor standing unit

makes your world comfortable


Whatever you're planning to do with your day, you want to be comfortable while you're doing it. Whether it's the coolness of a summer breeze or the cosiness during winter, your living space needs that delicious feeling of wellbeing all year round. Perfera is unobtrusive and features a stylishly designed front panel, whisper-quiet operation and reduced airflow, turning each room into a true haven of conspicuous comfort.



Comfortable: dual airflow

Easier individual control of airflow

The dual airflow of the Perfera floor-standing unit is perfect for creating the ideal level of heating. Air is directed both upwards and downwards to deliver even warm air distribution. And when the Perfera is in heat mode, your feet stay warm and the temperature throughout the room is evenly distributed, guaranteeing maximum comfort. Sheer bliss!

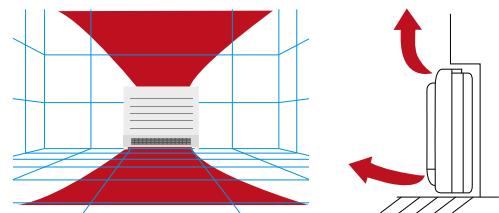

Silent operation

Perfera uses a specially designed turbo fan that optimises airflow and creates high energy efficiency at low sound levels.

up to
A+++
in cooling

up to
A++
in heating



Air quality

Flash streamer/titanium apatite deodorising filter

Flash streamer: using electrons to trigger chemical reactions with airborne particles, the Flash Streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing better, cleaner air. And the titanium apatite deodorising filter works hard to combat smells such as tobacco smoke and pets.

Installation

Whether **built-in or wall-mounted**, the Perfera blends into the background and fits into your interior without any problem.




3 unique heating features



Heat boost

Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster* than a regular air conditioner (pair only).

*Heat Plus test condition: 50 class, outdoor temperature 2°C - Indoor temperature 10°C, R/C setting: 23°C

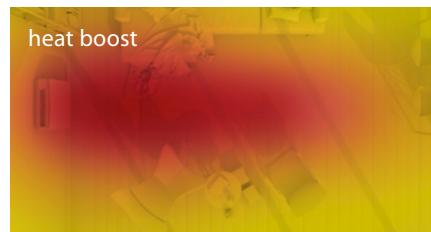

Floor warming

The floor warming function optimises convection by distributing hot air from the bottom of the unit.



Heat plus

The heat plus function provides cosy heating by simulating radiant heat for 30 minutes. Afterwards, the previous settings are again activated.



Intuitive online and voice control

NEW Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!

Floor standing unit

Design floor standing unit for optimal heating comfort thanks to unique heating features

- › Seasonal efficiency values up to A++ in heating, resulting in low running costs compared to gas boilers and electric heating
- › Excellent contemporary design
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › The floor warming function optimises convection by distributing hot air from the bottom of the unit
- › The heat plus function provides 30 minutes cosy heating by simulating radiant heat
- › Dual air discharge flow for better air distribution
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Onecta app: control your indoor from any location with an app, via your local network or internet.

More details and final information can be found by scanning or clicking the QR codes.



CVXM-A




FVXM-A



RXM-R



RXM-R9

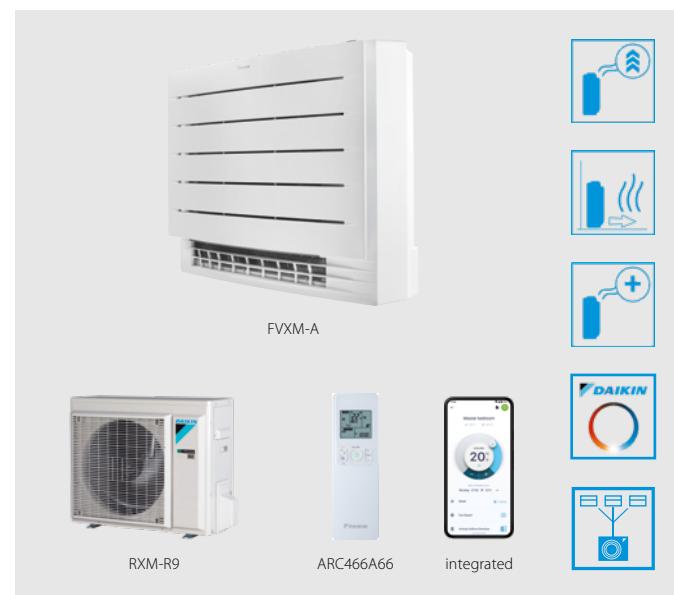

- › Quiet operation: down to 19dBA sound pressure level
- › Combinable with 2 and 3 port multi outdoor units (except 2-3MXM68)

Efficiency data		FVXM + RXM	CVXM20A	25A + 25R9	35A + 35R9	50A + 50R
Cooling capacity	Min./Nom./Max.	kW		1.30/2.40/3.50	1.40/3.40/4.00	1.40/5.00/5.80
Heating capacity	Min./Nom./Max.	kW		1.30/3.40/4.70	1.40/4.50/5.80	1.40/5.80/8.10
Power input	Cooling	Nom.	kW	0.54	0.85	1.31
	Heating	Nom.	kW	0.75	1.15	1.52
Space cooling	Energy efficiency class			A***		A**
	Capacity	Pdesign	kW	2.40	3.40	5.00
	SEER			8.55	8.11	7.30
	Annual energy consumption	kWh/a		98	147	240
Space heating (Average climate)	Energy efficiency class			A**		A*
	Capacity	Pdesign	kW	2.30	2.80	4.10
	SCOP/A			4.65	4.63	4.31
	Annual energy consumption	kWh/a		693	847	1,330
Nominal efficiency	EER			4.47	4.01	3.81
	COP			4.55	3.90	3.81
	Annual energy consumption	kWh		268	424	656
	Energy labeling Directive Cooling/Heating			A/A		

Indoor unit		FVXM	CVXM20A	25A	35A	50A
Dimensions	Unit	HeightxWidthxDepth	mm		600x750x238	
Weight	Unit		kg		17	
Air filter	Type				Removable / washable	
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.1/4.9/7/8.7	4.1/4.9/7/9.2
		Heating	Silent operation/ Low/Medium/High	m³/min	4.1/5.6/7.2/9.2	4.1/5.6/7.2/9.8
Sound power level	Cooling			dBA	52.0	53.0
	Heating			dBA	52.0	53.0
Sound pressure level	Cooling	Silent operation/Low/High	dBA	22.0/25.0/38.0	20.0/25.0/38.0	20.0/25.0/39.0
	Heating	Silent operation/Low/High	dBA	21.0/25.0/38.0	19.0/25.0/38.0	19.0/25.0/39.0
Control systems	Infrared	remote control			ARC466A66	

Outdoor unit		RXM	CVXM20A	25R9	35R9	50R
Dimensions	Unit	HeightxWidthxDepth	mm		552x840x350	
Weight	Unit		kg		32	49.0
Sound power level	Cooling	Nom.	dBA	58.0	61.0	62.0
	Heating	Nom.	dBA	59.0	61.0	62.0
Sound pressure level	Cooling	Nom.	dBA	46.0	49.0	48.0
	Heating	Nom.	dBA	47.0	49.0	
Operation range	Cooling	Ambient	Min.-Max.	°CDB	-10~46	
	Heating	Ambient	Min. - Max.	°CDB	-15~24	
Refrigerant	Type/GWP				R-32/675.0	
	Charge		kg/TCO2eq	0.76/0.52	1.15/0.780	
Piping connections	Liquid/Gas OD		mm	6.35/9.50	6/12.7	
	Piping length	OU - IU	Max.	m	20	30
	System	Chargeless		m		
	Additional refrigerant charge		kg/m		10	
	Level difference	IU - OU	Max.	m	0.02 (for piping length exceeding 10m)	
Power supply	Phase/Frequency/Voltage		Hz/V	15	1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	13	20.0	16

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data | Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases | See separate drawings for electrical data

Floor standing unit

Floor standing unit for optimal heating comfort thanks to dual airflow

- Its low height (620 mm) enables the unit to fit perfectly beneath a window
- Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- Quiet operation: down to 23dBA sound pressure level
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



FVXM-F



RXM-R



RXM-R9

Efficiency data			FVXM + RXM	25F + 25R9	35F + 35R9	50F + 50R
Cooling capacity	Min./Nom./Max.	kW	1.30/2.50/3.00	1.40/3.50/3.80	1.40/5.00/5.60	
Heating capacity	Min./Nom./Max.	kW	1.30/3.40/4.50	1.40/4.50/5.00	1.40/5.80/8.10	
Power input	Cooling Nom.	kW	0.60	1.09	1.55	
	Heating Nom.	kW	0.77	1.19	1.60	
Space cooling	Energy efficiency class			A**		
	Capacity Pdesign	kW	2.50	3.50	5.00	
	SEER		7.20	6.43	6.80	
	Annual energy consumption	kWh/a	120	190	257	
Space heating (Average climate)	Energy efficiency class			A*		
	Capacity Pdesign	kW	2.40	2.90	4.20	
	SCOP/A		4.56		4.00	
	Annual energy consumption	kWh/a	737	1,015	1,471	
Nominal efficiency	EER		4.20	3.21	3.23	
	COP		4.42	3.78	3.63	
	Annual energy consumption	kWh	298	545	773	
	Energy labeling Directive Cooling/Heating			A/A		
Indoor unit			FVXM	25F	35F	50F
Dimensions	Unit	HeightxWidthxDepth	mm		600x700x210	
Weight	Unit		kg		14	
Air filter	Type			Removable / washable		
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.1/4.8/6.5/8.2	4.5/4.9/6.7/8.5
		Heating	Silent operation/ Low/Medium/High	m³/min	4.4/5.0/6.9/8.8	4.7/5.2/7.3/9.4
Sound power level	Cooling			dBA	52	57
	Heating			dBA	52	58
Sound pressure level	Cooling	Silent operation/Low/High	dBA	23/26/38	24/27/39	32/36/44
	Heating	Silent operation/Low/High	dBA	23/26/38	24/27/39	32/36/45
Outdoor unit			RXM	25R9	35R9	50R
Dimensions	Unit	HeightxWidthxDepth	mm		552x840x350	734x954x401
Weight	Unit		kg		32	49.0
Sound power level	Cooling	Nom.	dBA	58.0	61.0	62.0
	Heating	Nom.	dBA	59.0	61.0	62.0
Sound pressure level	Cooling	Nom.	dBA	46.0	49.0	48.0
	Heating	Nom.	dBA	47.0		49.0
Operation range	Cooling	Ambient Min.-~Max.	°CDB		-10~46	
	Heating	Ambient Min. - Max.	°CDB		-15~24	
Refrigerant	Type				R-32	
	GWP				675	675.0
Piping connections	Charge		kg/tCO2Eq	0.76/0.52		1.15/0.780
	Liquid OD		mm	6.35		6
	Gas OD		mm	9.50		12.7
Piping length	OU - IU Max.	m		20		30
	System Chargeless	m			10	
Additional refrigerant charge		kg/m		0.02 (for piping length exceeding 10m)		
	Level difference IU - OU Max.	m		15		20.0
Power supply	Phase/Frequency/Voltage	Hz/V			1~/50 / 220-240	
Current - 50Hz	Maximum fuse amps (MFA)	A		13		16

See separate drawing for electrical data | See separate drawing for operation range | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | 50Hz, 220-230-240V | 220V | 230V | 240V | Contains fluorinated greenhouse gases

Concealed ceiling unit

Compact concealed ceiling unit, with a height of only 200mm

- › Invisible unit as the unit is concealed in the ceiling: only the suction and discharge grilles are visible
- › Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- › Medium external static pressure up to 40Pa facilitates unit use with flexible ducts of varying lengths
- › Unified indoor unit range for R-32 and R-410A
- › Auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- › Multi zoning kit allows multiple individually-controlled climate zones to be served by one indoor unit
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Low energy consumption thanks to DC fan motor



More details and final information can be found by scanning or clicking the QR codes.



FDXM-F9



RXM-R



RXM-R9

Efficiency data		FDXM + RXM	25F9 + 25R	35F9 + 35R	50F9 + 50R	60F9 + 60R
Cooling capacity	Min./Nom./Max.	kW	1.30/2.40/3.00	1.40/3.40/3.80	1.70/5.00/5.30	1.70/6.00/6.50
Heating capacity	Min./Nom./Max.	kW	1.30/3.20/4.50	1.40/4.00/5.00	1.70/5.80/6.00	1.70/7.00/7.10
Space cooling	Energy efficiency class		A ⁺	A ⁺	A ⁺	A ⁺
	Capacity Pdesign	kW	2.40	3.40	5.00	6.00
	SEER		5.68	5.26	5.77	5.56
	Annual energy consumption	kWh/a	148	226	303	378
Space heating (Average climate)	Energy efficiency class		A ⁺	A ⁺	A ⁺	A ⁺
	Capacity Pdesign	kW	2.60	2.90	4.00	4.60
	SCOP/A		4.24	3.88	3.93	3.80
	Annual energy consumption	kWh/a	858	1,046	1,424	1,693
Indoor unit		FDXM	25F9	35F9	50F9	60F9
Dimensions	Unit	HeightxWidthxDepth	mm	200x750x620		200x1,150x620
Weight	Unit		kg	21		28
Air filter	Type			Removable/washable		
Fan	Air flow rate	Cooling Heating	Low/Medium/High m ³ /min	7.3/8.0/8.7	13.3/14.6/15.8	13.5/14.8/16.0
			Low/Medium/High m ³ /min	7.3/8.0/8.7	13.3/14.6/15.8	13.5/14.8/16.0
	External static pressure	Nom.	Pa	30		40
Sound power level	Cooling		dBA	53.0	55.0	56.0
	Heating		dBA	53.0	55.0	56.0
Sound pressure level	Cooling	Low/High	dBA	27.0/35.0		30.0/38.0
	Heating	Low/High	dBA	27.0/35.0		30.0/38.0
Control systems	Infrared remote control			-		
Outdoor unit		RXM	25R9	35R9	50R	60R
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285		734x870x373
Weight	Unit		kg	32		49.0
Sound power level	Cooling Nom.		dBA	58	61	62.0
	Heating Nom.		dBA	59	61	62.0
Sound pressure level	Cooling Nom.		dBA	46	49	48.0
	Heating Nom.		dBA	47	49	49.0
Operation range	Cooling	Ambient Min.~Max.	°CDB		-10~46	
	Heating	Ambient Min. - Max.	°CDB		-15~24	
Refrigerant	Type				R-32	
	GWP			675		675.0
Piping connections	Liquid Gas	OD OD	mm mm	0.76/0.52		1.15/0.780
	Piping length	OU - IU Max.	m	9.50		12.7
	System	Chargeless	m	20		30
	Additional refrigerant charge		kg/m	10		-
	Level difference IU - OU	Max.	m		0.02 (for piping length exceeding 10m)	
Power supply	Phase/Frequency/Voltage		Hz/V	15		20.0
Current - 50Hz	Maximum fuse amps (MFA)		A	13		16

See separate drawing for electrical data | See separate drawing for operation range | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Contains fluorinated greenhouse gases



Less is more



Multi Split Simply extend your comfort!

A Daikin multi split system offers you unexpected possibilities in creating a comfortable and cosy home. This is your solution to reduce limitations like environmental impact and financial aspects.


Less mounting space, less visibility, less sound

- › **Save space:** Drastically reduce the space required for placing a number of units on your facade
- › **Less visibility:** Enjoy your nice ambience. Finding just one hiding place is much easier
- › **Less noise:** Only one unit in operation is much quieter than two or more units

Lower power consumption, high efficiency

- › **Less power consumption:** Our big compressors can work more efficiently than various smaller ones with the same capacity in sum. Also save a significant proportion of energy thanks to standby mode

Pair split or multi split combination –
the direct system comparison

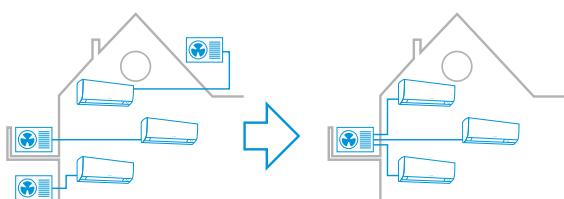

Conventional pair split
installation for air-conditio-
ning three rooms

Solution for the same situa-
tion with only
one multi split outdoor unit

Easier installation, wiring, piping and maintenance

- › **Save mounting equipment:** Wherever you want to place an outdoor unit, for every unit you will need a mounting for a secure fixing and problem-free operation
- › **Save time:** The physical installation, wiring, drain piping as well as the initial setup of only one system is much easier and faster
- › When using only one outdoor unit instead of two or more, the statistical probability of a **possible technical defect is reduced** with every unit that you do not need.

More flexibility: Connect up to 5 indoor units of any style

There are many possibilities in comfort you can profit from a multi split solution:

- › **Up to 5 indoor units** connectable to only one outdoor unit
- › Every single indoor unit can be **regulated separately**
- › Choose from **a greater variety** of connectable indoor unit types out of our split and Sky Air series
- › Use low capacity indoor units specially **designed for small rooms** which can only be connected to a multi split system
- › Are you planning an **additional indoor unit later on?** Just decide now for an outdoor unit with higher capacity and simply connect it later

Multi model application

- > New design outlook for full range
- > Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- > Up to 5 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- > Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



CONNECTABLE INDOOR UNITS	Wall mounted								Concealed ceiling			Floor standing				Round flow	Fully flat	Ceiling suspended	Concealed floor standing
	CTXA-AW/BS/BT/BB		FTXA-AW/BS/ BT/BB	CTXM-R	FTXM-R		FTXJ-AW/S/B	FTXP-M9	FDXM-F9	FBA-A9	CVXM-A	FVXM-A	FVXM-F	FCAG-B	FFA-A9	FHA-A9	FNA-A9		
	15 20 25 35 42 50	15 20 25 35 42 50	15 20 25 35 42 50	20 25 35 42 50 60	71	20 25 35 42 50	20 25 35 42 50	20 25 35 42 50	25 35 50 60 35	20 35 50 60 35	20 25 35 50 60 35	25 35 50 60 35	25 35 50 60 35	25 35 50 60 35	35 50 60 35	35 50 60 35			
2MXM40A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
2MXM50A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
2MXM68A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
3MXM40A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
3MXM52A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
3MXM68A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
4MXM68A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
4MXM80A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
5MXM90A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		

More details and final information can be found by scanning or clicking the QR codes.



2MXM-A



3MXM-A



4MXM-A



5MXM-A

Outdoor unit			2MXM40A	2MXM50A	2MXM68A	3MXM40A	3MXM52A	3MXM68A	4MXM68A	4MXM80A	5MXM90A
Dimensions	Unit	HeightxWidthxDepth	mm	552x852x350					734x974x408		
Weight	Unit		kg	36	41	60.0	57	62.0	63.0	67.0	68.0
Sound power level	Cooling			60		61.0	59.0		61.0		64.0
Sound pressure level	Cooling Nom.		dBA	46		48		46		48	52
	Heating Nom.		dBA	48	50	48	47	48		49	52
Operation range	Cooling Ambient Min.~Max.		°CDB					-10~46			
	Heating Ambient Min.~Max.		°CWB					-15~18			
Refrigerant	Type							R-32			
	GWP							675.0			
	Charge		kg/TCO2Eq	0.88/0.60	1.15/0.78	2.00/1.35	1.80/1.22		2.00/1.35		2.40/1.62
Piping connections	Liquid OD		mm	6.4		6.35	6.4		6.35		
	Gas OD		mm	9.5		9.50	9.5		9.50		
	Piping length System	OU - IU Max.	m	20 (1)				25 (1)			
		Chargeless	m	-				30			
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 20m)				0.02 (for piping length exceeding 30m)			
	Level difference IU - OU Max.		m					15.0			
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-230-240				1~/50 /220-240			
Current - 50Hz	Maximum fuse amps (MFA)		A	16		20	16		20		25 32

(1)For one room | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases | For combination with CVXM-A, FVXM-A - maximum piping length is 30m.

Multi+

Only one system for domestic hot water + air conditioning

- › New design outlook for outdoor unit
- › Seasonal efficiency values up to A+++ in cooling and A++ for air conditioning
- › Domestic hot water efficiencies up to A
- › Wall mounted domestic hot water tank, available in 90l and 120l
- › Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- › The outdoor unit is fitted with a swing compressor, renowned for its low noise and high energy efficiency



CONNECTABLE INDOOR UNITS	Wall mounted										Concealed ceiling					Floor standing			Round flow			Fully flat			Ceiling mounted			Domestic hot water tank							
	C/FTXA-AW/BS/BT/BB					C/FTXM-R					FTXJ-AW/S/B					FDXM-F9			FBA-A9		FVXM-F			FCAG-B		FFA-A9		FHA-A9		FNA-A9			EKHWET-BV3		
4MWXM52A	15	20	25	35	42	50	15	20	25	35	42	50	20	25	35	50	35	50	60	71	25	35	50	35	50	25	35	50	35	50	25	35	50	90	120
*	No combination with additional indoor units possible																																		

More details and final information can be found by scanning or clicking the QR codes.



4MWXM-A

EKHWET-BV3

Efficiency data		EKHWET90BV3 + 4MWXM52A						EKHWET120BV3 + 4MWXM52A					
Heating capacity	Nom.	kW	-					-					
COP	Average climate		2.19					2.30					
	Warm climate		2.68					2.70					
Heat-up time	Average climate	h:mm	1:18					2:15					
	Warm climate	h:mm	1:53					3:35					
Seasonal efficiency	Domestic hot water heating	General average climate	Declared load profile rwh (water heating efficiency) %	M				L					
				90				94					
Water heating energy efficiency class*													
Water temperature by heat pump	Max.							50					


*EN16147(2017)

Domestic hot water tank		EKHWET			90BV3			120BV3		
Casing	Colour							White		
Material								Enamelled steel		
Dimensions	HeightxWidthxDepth	mm			1,032x536x571			1,296x536x571		
Weight	kg				47			55		
Tank	Water volume	l			89			118		
	Energy efficiency class*				B			C		
Operation range	Heating	Ambient	Min.~Max. °C					-15~43		
		Water side	Min.~Max. °C					10~53		

* LOT 2

Outdoor unit		4MWXM						52A					
Dimensions	Unit	HeightxWidthxDepth	mm						734x974x401				
Weight	Unit		kg						60				
Sound power level	Cooling								59				
Sound pressure level	Cooling	Nom./High	dBA						46				
	Heating	Nom./High	dBA						47				
Operation range	Cooling	Ambient	Min.~Max. °C						-10~46				
	Heating	Ambient	Min.~Max. °CWB						-15~24				
Refrigerant	Type								R-32				
	GWP								675				
	Charge	kg/TCO2Eq							2.20/1.49				
Piping connections	Liquid OD	mm							6.35				
DX	Gas OD	mm							9.50/12.7/15.9				
Piping connections	Liquid OD	mm							6.35				
DHW	Gas OD	mm							9.50				
Piping length	OU - IU	Max. m							25				
		Additional refrigerant charge kg/m							0.02 (for piping length exceeding 10m)				
Level difference	IU - OU	Max. m							15				
Power supply	Phase/Frequency/Voltage Hz/V								1~/50 /220-240				
Current - 50Hz	Maximum fuse amps (MFA) A								10				

*Note: blue cells contain preliminary data

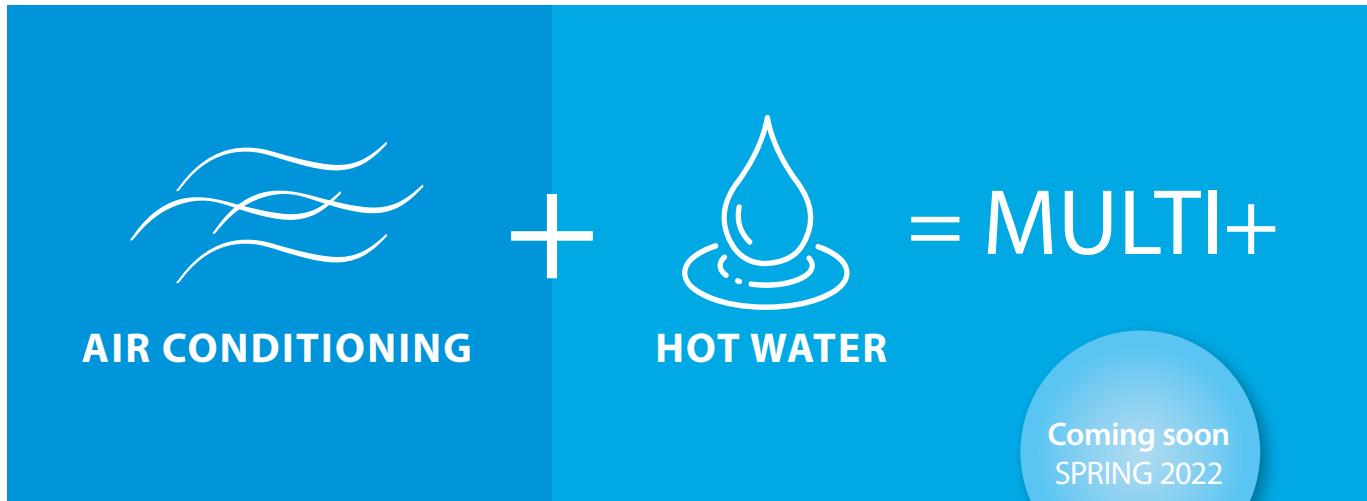


Coming soon
SPRING 2022

NEW
Multi +
for cooling, heating
and hot water

Connect **Multi+ outdoor unit**
with up to 3 indoor units and
a 90 l or 120 l tank to provide
domestic hot water

NEW
Design multi outdoor unit
for the full range

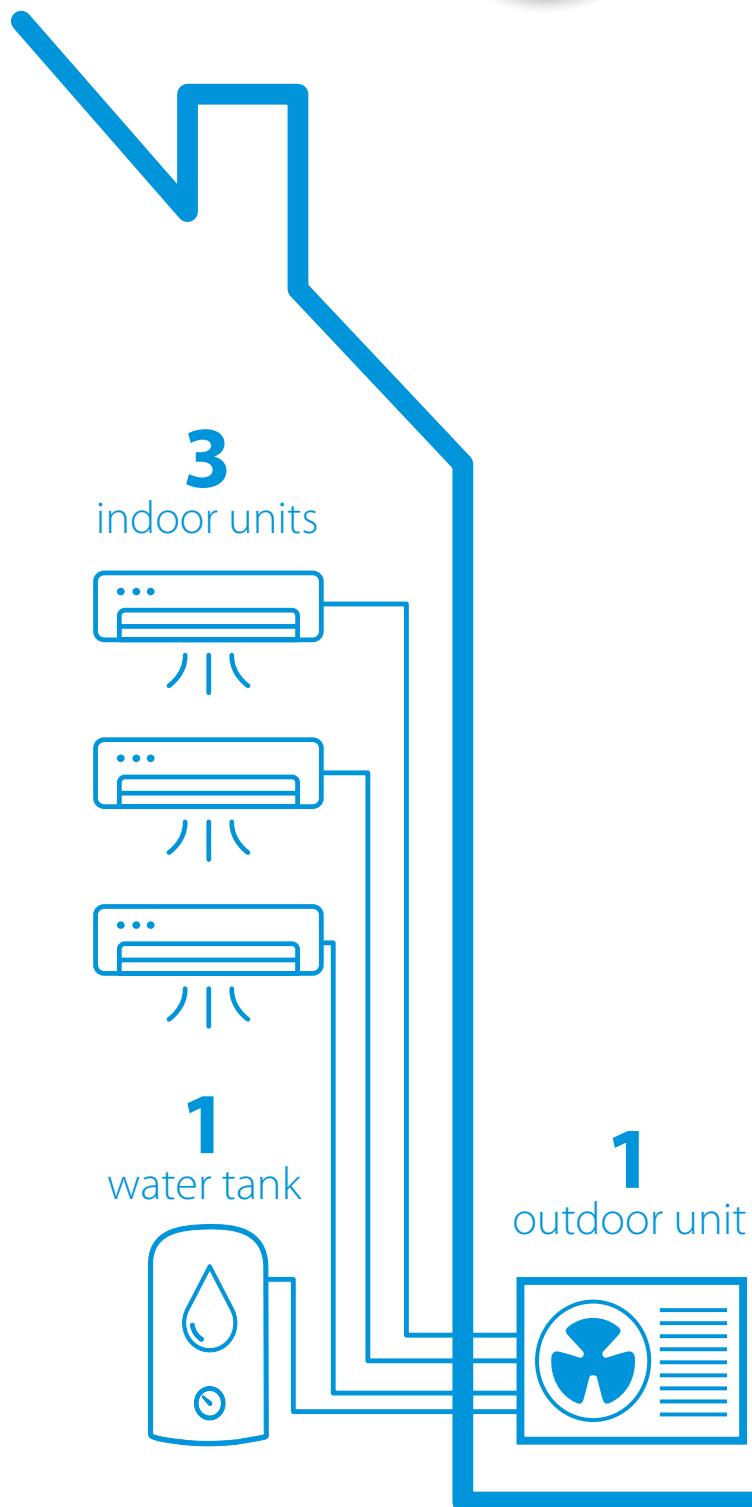

Multi model application

- › Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- › Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Up to 2 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



Indoor units	FTXF20B	FTXF25B	FTXF35B	CTXF20C	CTXF25C	CTXF35C
Outdoor units	2MXF40A	●	●	●	●	●
	2MXF50A	●	●	●	●	●
	3MXF52A9	●	●	●	●	●
	3MXF68A9	●	●	●	●	●

More details and final information can be found by scanning or clicking the QR codes.



2MXF-A



3MXF-A9

Outdoor Unit	2MXF40A	2MXF50A	3MXF52A9	3MXF68A9
Dimensions	Unit HeightxWidthxDepth mm	550x765x285	734x958x340	
Weight	Unit kg	36	41	62.0
Sound power level	Cooling	60	59	61
Sound pressure level	Cooling Nom./High	-/46	-/48	46.0/-
	Heating Nom./High	-/48	-/50	47.0/-
Operation range	Cooling Ambient Min.~Max. °CDB		-10~46	
	Heating Ambient Min.~Max. °CWB		-15~18	
Refrigerant	Type		R-32	
	GWP		675	
	Charge kg/TCO2Eq	0.88/0.60	1.15/0.78	1.80/1.22
Piping connections	Liquid OD mm		6.35	
	Gas OD mm		9.5	
	Piping length OU - IU Max. m	20 (1)		25 (1)
	System Chargeless m	20		30
	Additional refrigerant charge kg/m	0.02 (for piping length exceeding 20m)	0.02 (for piping length exceeding 30m)	
	Level difference IU - OU Max. m		15.0	
Power supply	Phase/Frequency/Voltage Hz/V	1~/50 /220-230-240		
Current - 50Hz	Maximum fuse amps (MFA) A	16		20

(1)For one room | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases

Daikin Altherma hybrid heat pump

Hybrid technology combining gas, air to water and air to air heat pump for heating, cooling and hot water

- Daikin Altherma hybrid heat pump combines air-to-water heat pump technology with gas condensing technology
- Heating only wall mounted indoor unit of air-to-water heat pump
- Wall mounted gas module
- Depending on outdoor temperature, energy prices and internal heat load, Daikin Altherma hybrid heat pump always selects the most economical mode to operate
- Low investment cost: no need to replace the existing radiators (up to 80°C) and pipe work
- Provides sufficient heat in renovation applications as all heat loads are covered up to 32kW
- Easy and fast installation thanks to the compact dimensions and quick interconnections



CHYHBH-AV32 / EHYKOMB-AA2/3

CONNECTABLE INDOOR UNITS	Wall mounted										Concealed ceiling				Floor standing				Round flow	Fully flat	Ceiling suspended	Concealed floor standing	Hybrid heat pump										
	CTXA-AW/BS/BT/BB	FTXA-AW/BS/ BT/BB	CTXM-R	FTXM-R			FTXJ-MW/S	FTXP-M9	FDXM-F9	FBA-A9	CTXM-A	FVXM-A	FVXM-F	FCAG-B	FFA-A9	FHA-A9	FNA-A9	CHYHBH-AV32															
	15	20	25	35	42	50	15	20	25	35	42	50	60	71	20	25	35	50	60	20	25	35	50	60	35	50	60	25	35	50	60	05	08
3MXM52N7	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
3MXM68N9	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
4MXM68N9	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
4MXM80N9	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
5MXM90N9	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

More details and final information can be found by scanning or clicking the QR codes.



CHYHBH-AV32



EHYKOMB-AA2



EHYKOMB-AA3

Efficiency data				CHYHBH05AV32 /3MXM52N8	CHYHBH05AV32 /3MXM68N9	CHYHBH05AV32 /4MXM68N9	CHYHBH05AV32 /4MXM80N9	CHYHBH08AV32 /4MXM80N9	CHYHBH05AV32 /5MXM90N9	CHYHBH08AV32 /5MXM90N9
Heating capacity	Nom.	kW	4.41 (1)		4.50 (1)		6.78 (1)	4.50 (1)	6.78 (1)	
COP			4.49 (1)		3.91 (1)		4.17 (1)	4.04 (1)	4.17 (1)	
Pump							51.80 (1)			
Seasonal efficiency	Domestic hot water heating	General Average climate	Declared load profile ηwh (water heating efficiency) %				XL			
							96			
Water heating energy efficiency class							A+			

(1) DB/WB 7°C/6°C - LWC 35°C (DT=5°C), boiler bypassed

Indoor Unit (Hydrobox)				CHYHBH05AV32	CHYHBH08AV32
Casing	Colour			White	
	Material			Precoated sheet metal	
Dimensions	Unit HeightxWidthxDepth	mm		902x450x164	
Weight	Unit kg			30.0	
Operation range	Heating Ambient Min.~Max. °C			-15 ~24	
	Water side Min.~Max. °C			25 ~50	
Indoor unit (Boiler)				EHYKOMB33AA2/AA3	
Central heating	Heat input Qn (net Nom calorific value)	Min/Max	kW	6.2 / 7.6 / 7.6 / 22.1 / 27.0 / 27.0	
	Output Pn at 80/60°C	Min/Nom	kW	6.7 / 8.2 / 8.2 / 21.8 / 26.6 / 26.6	
	Efficiency	Net calorific value	%	98 / 107	
	Operation range	Min./Max. °C		15 / 80	
Domestic hot water	Output Min./Nom. Water flow Rate Nom	l/min	kW	7.6/32.7	
	Operation range Min./Max. °C			9.0 / 15.0	
Gas	Connection Diameter	mm		40/65	
	Consumption Min./Max (G20)	m³/h		15	
	Consumption Min./Max (G25)	m³/h		0.78/3.39	
	Consumption Min./Max (G31)	m³/h		0.90/3.93	
Supply air	Connection Concentric	mm		0.30/1.29	
Flue gas Casing	Connection Colour	mm		100	
	Material			1	
Dimensions	Unit HeightxWidthxDepth	Casing mm		60	
Weight	Unit Empty	kg		White - RAL9010	
Power supply	Phase/Frequency/Voltage	Hz/V		Precoated sheet metal	
Electrical power consumption	Max. Standby	W		710x450x240	
				36	
				1~/50/230	
				55	
				2	



Siesta wall mounted units



The Siesta range offers a wide variety of wall mounted units with high efficiency values up to A+++. They provide excellent levels of comfort, and almost all indoor units are connectable to a multi outdoor unit.



Siesta Bluevolution range

R-32**BLUEVOLUTION**

Type	Model	Product name	20	25	35	50	60	71
	Wall mounted unit Siesta, discreet, modern unit for optimal efficiency and comfort thanks to 2-area motion detection sensor and Flash Streamer	ATXM-R		● (multi only)	A+++	A+++	A++	
	Wall mounted unit Siesta, providing high efficiency and comfort while reducing the environmental impact	ATXP-M		A++	A++	A++		
<i>Siesta</i> Wall mounted	Siesta wall mounted unit Wall mounted unit for low energy consumption and pleasant comfort	ATXF-D/A		A++	A++	A++	A++	A
	Siesta wall mounted unit Wall mounted unit, offering good value for money and ensuring a steady supply of clean air	ATXC-C		A++	A++	A++	A++	A
	Siesta wall mounted unit Wall mounted unit, offering good value for money	ATXQ-A			A++ A*	A++ A*		

Wall mounted unit

Attractive, wall mounted Siesta unit with perfect indoor air quality

- › Seasonal efficiency values up to A+++ in cooling and heating
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Quiet operation: down to 19dBA sound pressure level
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › 2-area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting. (larger capacity area)



More details and final information can be found by scanning or clicking the QR codes.



ATXM-R



ARXM-R



ARXM-R9

	ATXM + ARXM		20R + 20R	25R + 25R9	35R + 35R9	50R + 50R
Cooling capacity	Min./Nom./Max.	kW		1.30/2.50/3.20	1.40/3.40/4.00	1.70/5.00/6.00
Heating capacity	Min./Nom./Max.	kW		1.30/2.80/4.70	1.40/4.00/5.20	1.70/5.80/7.70
Power input	Cooling Nom.	kW		0.56	0.80	1.45
	Heating Nom.	kW		0.56	0.99	1.53
Space cooling	Energy efficiency class			A+++	A++	
	Capacity Pdesign	kW		2.50	3.40	5.00
	SEER			8.55		7.35
	Annual energy consumption	kWh/a		102	139	238
Space heating (Average climate)	Energy efficiency class			A+++	A++	
	Capacity Pdesign	kW		2.40	2.50	4.60
	SCOP/A			5.10		4.65
	Annual energy consumption	kWh/a		659	686	1,384
Nominal efficiency	EER			4.50	4.23	3.45
	COP			5.00	4.04	3.79
	Annual energy consumption	kWh/a		278	402	725
	Energy labeling Directive Cooling/Heating				A/A	
Indoor unit	ATXM		20R	25R	35R	50R
Dimensions	Unit	HeightxWidthxDepth	mm	295x778x272		299x998x292
Weight	Unit		kg	10.0		14.5
Air filter	Type			Removable / washable		
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.3/5.7/7.5/10.5	4.1/5.7/7.6/10.5
		Heating	Silent operation/ Low/Medium/High	m³/min	5.1/6.2/8.2.9.3	4.9/6.3/8.0/9.8
Sound power level	Cooling				58	58.0
	Heating				55	58.0
Sound pressure level	Cooling	Silent operation/Low/High	dBA	19/25/41	19/25/45	27.0/36.0/44.0
	Heating	Silent operation/Low/High	dBA	20/26/39	20/27/39	31.0/34.0/43.0
Control systems	Infrared remote control					ARC466A67
Outdoor unit	ARXM/ARXM		20R	25R9	35R9	50R
Dimensions	Unit	HeightxWidthxDepth	mm	552x840x350		734x954x401
Weight	Unit		kg	32		49.0
Sound power level	Cooling Nom.		dBA	58.0	61.0	62.0
	Heating Nom.		dBA	59.0	61.0	62.0
Sound pressure level	Cooling Nom.		dBA	46.0	49.0	48.0
	Heating Nom.		dBA	47.0		49.0
Operation range	Cooling Ambient	Min.~Max.	°CDB	-10~50(1)/46(2)	-10(3)/-10(4)~50(3)/46(4)	
	Heating Ambient	Min. - Max.	°CDB	-20(1)/-15(2)-24	-20(3)/-15(4)-24(3)/24(4)	
Refrigerant	Type/GWP			R-32/675.0		
	Charge		kg/TCO2Eq	0.76/0.52		1.15/0.780
Piping connections	Liquid/Gas OD		mm	6.35/9.50		6.35/12.7
	Piping length	OU - IU System	Max. Chargeless	m m	20 10	30 -
	Additional refrigerant charge		kg/m		0.02 (for piping length exceeding 10m)	
	Level difference IU - OU	Max.	m		15	20.0
Power supply	Phase/Frequency/Voltage	Hz/V			1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)	A			13	16

(1) Only possible in combination with ATXM*N2V1B, FTXM*N2V1B, ATXM*R2V1B, ATXM*5V1B, FTXM*2V1B, FTXM*5V1B | (2) Only possible in combination with ATXM*M2V1B, FTXM*M2V1B, FVXM*FV1B, FCAG*AVEB, FFA*A2VEB9, FBA*A2VEB9, FHA*A2VEB9, FDXM*F3V1B, F3V1B, FNA*A2VEB9, ADEA*A2VEB9, FVXM*A2V1B | (3) Only possible in combination with CTXM*N2V1B, ATXM*N2V1B, FTXM*N2V1B | (4) Only possible in combination with CTXM*M2V1B, ATXM*M2V1B, FTXM*M2V1B, FVXM*F2V1B, F2V1B, FCAG*A2VEB9, FFA*A2VEB9, FBA*A2VEB9, FHA*A2VEB9, FDXM*F3V1B, F3V1B, FNA*A2VEB9, ADEA*A2VEB9 | See separate drawing for operation range | See separate drawing for electrical data | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases

Wall mounted unit

Discreet Siesta wall mounted unit providing high efficiency and comfort

- › Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Seasonal efficiency values up to A++ in cooling and heating
- › Space saving contemporary wall mounted design

More details and final information can be found by scanning or clicking the QR codes.



ATXP-M



ARXP-M

Efficiency data			ATXP + ARXP	20M + 20M	25M + 25M	35M + 35M
Cooling capacity	Min./Nom./Max.	kW	1.3/2.00/2.6	1.3/2.50/3.0	1.3/3.50/4.0	1.3/3.50/4.0
Heating capacity	Min./Nom./Max.	kW	1.30/2.50/3.50	1.30/3.00/4.00	1.30/4.00/4.80	1.30/4.00/4.80
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.50/0.72	0.31/0.66/0.72	0.29/1.01/1.30
	Heating	Min./Nom./Max.	kW	0.25/0.52/0.95	0.25/0.69/0.95	0.29/1.00/1.29
Space cooling	Energy efficiency class			A**		
	Capacity	Pdesign	kW	2.00	2.50	3.50
	SEER			6.77	6.85	6.56
Space heating (Average climate)	Annual energy consumption			kWh/a	104	128
	Energy efficiency class				A**	
	Capacity	Pdesign	kW	2.20	2.40	2.80
Nominal efficiency	SCOP/A			4.64	4.60	4.62
	Annual energy consumption			kWh/a	663	730
	EER			3.98	3.79	3.45
Control systems	COP			4.77	4.36	4.02
	Energy labeling Directive Cooling/Heating				A/A	
Indoor unit			ATXP	20M	25M	35M
Dimensions	Unit	HeightxWidthxDepth	mm		286x770x225	
Weight	Unit		kg	8.50		9.00
Air filter	Type			Removable / washable		
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.2/5.6/7.4/9.5	4.2/5.8/7.7/9.7
		Heating	Silent operation/ Low/Medium/High	m³/min	5.2/6.2/8.1/10.4	5.2/6.4/8.1/10.4
Sound power level	Cooling			dBA	55	58
	Heating			dBA	55	58
Sound pressure level	Cooling	Silent operation/Low/High	dBA	19/25/39	19/26/40	20/27/43
	Heating	Silent operation/Low/High	dBA	21/28/39	21/28/40	21/29/40
Control systems	Infrared remote control				ARC480A53	
Outdoor unit			ARXP	20M	25M	35M
Dimensions	Unit	HeightxWidthxDepth	mm		550x658x275	
Weight	Unit		kg	26		28
Sound power level	Cooling		dBA		-	
Sound pressure level	Cooling	High	dBA	46		48
	Heating	High	dBA	47		48
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~48	
	Heating	Ambient	Min.~Max.	°CWB	-20~18	
Refrigerant	Type				R-32	
	GWP				675.0	
Piping connections	Charge		kg/TCO2Eq	0.55/0.37		0.70/0.48
	Liquid	OD	mm		6.35	
Power supply	Gas	OD	mm		9.5	
	Piping length OU - IU	Max.	m		15	
	Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 10m)		
Current - 50Hz	Level difference IU - OU	Max.	m		12	
	Phase/Frequency/Voltage	Hz/V			1~50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)	A			16	

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for electrical data | See separate drawing for operation range | Contains fluorinated greenhouse gases

Wall mounted unit

Siesta wall mounted unit for low energy consumption and pleasant comfort

- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Quiet in operation down to 20 dBA
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



ATXF-D



ATXF-A



ARXF-D



ARXF-A

Efficiency data			ATXF + ARXF	20D + 20D	25D + 25D	35D + 35D	42D + 42D	50A + 50A	60A + 60A	71A + 71A
Cooling capacity	Min./Nom./Max.	kW	1.3/2.00/2.4	1.3/2.50/2.8	1.3/3.30/3.8	1.4/4.20/4.3	1.70/5.00/6.00	1.70/6.00/7.00	2.30/7.10/7.30	
Heating capacity	Min./Nom./Max.	kW	1.30/2.40/3.30	1.30/2.80/3.70	1.30/3.50/4.40	1.40/4.60/5.00	1.70/6.00/7.70	1.70/6.40/8.00	2.30/8.20/9.00	
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.601/0.72	0.31/0.772/1.05	0.31/1.01/1.40	0.31/1.28/1.50	-/1.52/-	-/1.85/-	-/2.81/-
	Heating	Min./Nom./Max.	kW	0.25/0.640/0.95	0.25/0.751/1.11	0.25/0.940/1.50	0.25/1.24/1.40	-/1.62/-	-/1.64/-	-/2.63/-
Space cooling	Energy efficiency class					A**				A
	Capacity	Pdesign	kW	2.00	2.50	3.50	4.20	5.00	6.00	7.10
	SEER				6.40		6.45	6.18	6.12	5.12
	Annual energy consumption	kWh/a		109	137	191	228	283	343	486
Space heating (Average climate)	Energy efficiency class					A*				A
	Capacity	Pdesign	kW	2.20	2.40	2.60	3.30	4.60	4.80	6.20
	SCOP/A			4.07		4.01	4.25		4.03	3.81
	Annual energy consumption	kWh/a		757	837	907	1,086	1,598	1,670	2,278
Indoor unit	ATXF/ATXF		20D	25D	35D	42D	50A	60A	71A	
Dimensions	Unit	HeightxWidthxDepth	mm			286x770x225				295x990x263
Weight	Unit		kg		8.00		8.50	9.00		13.5
Air filter	Type					Removable/washable				
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.3/6.0/8/9.8	4.3/6.2/8/10.0	4.4/6.4/8/11.5	4.9/6.9/9/12.6	10.5/11.9/14.4/16.8	10.7/12.2/14.8/17.3
		Heating	Silent operation/ Low/Medium/High	m³/min	5.3/6.2/8.3/10.4	5.3/6.4/8.4/10.4	5.3/6.5/8.6/11.9	5.2/6.7/8.8/12.8	10.7/12.2/14.8/17.3	11.3/12.8/15.8/17.9
Sound power level	Cooling		dBA	53.0		54.0		59.0	59	60
	Heating		dBA		55.0		56.0	59.0	61	62
Sound pressure level	Cooling	Silent operation/Low/High	dBA	20.0/25.0/39.0	20.0/26.0/40.0	20.0/27.0/43.0	22.0/30.0/45.0	31/34/43	33/36/45	34/37/46
	Heating	Silent operation/Low/High	dBA	21.0/28.0/39.0	21.0/28.0/40.0	21.0/29.0/40.0	22.0/28.0/44.0	30/33/42	32/35/44	33/36/45
Control systems	Infrared remote control					ARC470A1				
	Wired remote control					BRC073A1				
Piping connections	Drain					18				
Outdoor unit	ARXF/ARXF			20D	25D	35D	42D	50A	60A	71A
Dimensions	Unit	HeightxWidthxDepth	mm			550x658x275				734x870x373
Weight	Unit		kg		24.0		28.0	46.0		50.0
Sound power level	Cooling									-
Sound pressure level	Cooling	Low/Nom./High	dBA	-/-/46.0		-/-/48.0		-/47/-	-/49/-	-/52/-
	Heating	Low/Nom./High	dBA	-/-/47.0		-/-/48.0			-/49/-	-/52/-
Operation range	Cooling	Ambient	Min.~Max.	°CDB		-10~48				-10~46
	Heating	Ambient	Min.~Max.	°CWB			-15~18			
Refrigerant	Type					R-32				
	GWP				675.0				675	
	Charge	kg/TCO2Eq		0.450/0.300	0.550/0.370	0.750/0.510	0.90/0.61		1.15/0.78	
Piping connections	Liquid - Gas Type					---				
	Piping length OU - IU	Max.	m		20				30	
	Piping length					-				
	Level difference IU - OU	Max.	m		12.0				20	
Power supply	Phase/Frequency/Voltage	Hz/V				1~/50 /220-240				
Current - 50Hz	Maximum fuse amps (MFA)	A		16					-	
Sound pressure level Nom.		dBA				-				
Piping connections	Total piping length					-				

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. Data for high efficiency series, Eurovent certified | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. Data for standard efficiency series | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases

Wall mounted unit

Siesta wall mounted unit, offering good value for money

- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Onecta app (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › Whisper quiet in operation down to 20 dBA
- › Seasonal efficiency values up to A++ in cooling
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



ATXC-C

ARXC-C

Efficiency data		ATXC + ARXC	20C + 20C	25C + 25C	35C + 35C	50C + 50C	60C + 60C	71C + 71C
Cooling capacity	Min./Max.	kW	1.3/3.0		1.3/4.0	1.4/6.2	1.8/7.0	2.3/7.3
Heating capacity	Min./Max.	kW		1.30/4.00		1.36/6.60	1.48/8.00	2.30/9.00
Space cooling	Energy efficiency class				A++			A
	Capacity	Pdesign	kW	2.08	2.57	3.44	5.08	6.21
	SEER			6.81	6.74	6.78	6.40	6.38
	Annual energy consumption	kWh/a		107	133	178	278	341
Space heating (Average climate)	Energy efficiency class				A+			A
	Capacity	Pdesign	kW	1.87	2.23	2.24	3.90	4.10
	SCOP/A			4.39	4.41	4.26	4.37	4.19
	Annual energy consumption	kWh/a		595	707	736	1,250	1,373
Indoor unit		ATXC	20C	25C	35C	50C	60C	71C
Dimensions	Unit	HeightxWidthxDepth	mm		288x770x234			297x990x273
Weight	Unit		kg	9.00		9.50		13.0
Air filter	Type			Removable / washable				
Fan	Air flow rate	Cooling	Silent operation / Low / Medium / High	m³/min	5.4/6.5/9/10.8	7.4/8.2/10/12.2	10.2/13.6/16/20.4	
Sound power level	Cooling			dBA	54	55	57	60
Sound pressure level	Cooling	Silent operation/Low/High		dBA	20/26/38	21/26/39	29/33/45	30/38/46
Control systems	Infrared remote control				ARC486A2			
Outdoor unit		ARXC	20C	25C	35C	50C	60C	71C
Dimensions	Unit	HeightxWidthxDepth	mm		550x658x273		615x845x300	695x930x350
Weight	Unit		kg	24.0	26.0		39.0	45.0
Sound power level	Cooling	Nom.		dBA	58	60	65	66
Sound pressure level	Cooling	High		dBA	45	46	51	54
Operation range	Cooling	Ambient	Min.~Max.	°CDB	10~46		-10~46	
	Heating	Ambient	Min.~Max.	°CWB		-15~18		
Refrigerant	Type				R-32			
	GWP				675.0			
Piping connections	Charge		kg/TCO2Eq		0.550/0.371	0.750/0.506	1.00/0.675	1.10/0.743
Liquid	OD		mm		6.35			
Gas	OD		mm		9.52			
Piping length	OU - IU	Max.	m		20			30
	System	Chargeless	m			8		
	Additional refrigerant charge		kg/m		0,017 (for piping length exceeding 7.5m)			
Level difference	IU - OU	Max.	m		15.0			20.0
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50 / 220-240			
Current - 50Hz	Maximum fuse amps (MFA)		A		16			

Wall mounted unit

Wall mounted unit, offering good value for money

- Flat, stylish front panel blends easily within any interior décor and is easier to clean
- Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- Seasonal efficiency values up to A++ in cooling
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



More details and final information can be found by scanning or clicking the QR codes.



ATXQ-A



ARXQ-A

Efficiency data				ATXQ + ARXQ	25A + 25A	35A + 35A
Cooling capacity	Min./Nom./Max.	kW		1.30/2.50/3.00	1.30/3.50/3.80	
Heating capacity	Min./Nom./Max.	kW		1.30/3.00/3.90	1.30/3.90/4.80	
Power input	Cooling Nom.	kW		0.77	1.08	
	Heating Nom.	kW		0.81	1.05	
Space cooling	Energy efficiency class				A++	
	Capacity Pdesign	kW		2.50	3.50	
	SEER			6.16	6.15	
	Annual energy consumption	kWh/a		142	199	
Space heating (Average climate)	Energy efficiency class				A+	
	Capacity Pdesign	kW		2.30	2.40	
	SCOP/A			4.15	4.11	
	Annual energy consumption	kWh/a		776	818	
Nominal efficiency	EER				3.24	
	COP				3.71	
	Annual energy consumption	kWh		386	540	
	Energy labeling Directive Cooling/Heating				A/A	
Indoor unit				ATXQ	25A	35A
Dimensions	Unit	HeightxWidthxDepth	mm		291x770x232	
Weight	Unit		kg		9.00	
Air filter	Type				Removable / washable	
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	5.0/6.5/8.1/10.2	6.0/7.0/8.5/10.5
		Heating	Silent operation/ Low/Medium/High	m³/min	6.8/8.1/9.6/11.1	6.9/8.3/10.0/12.0
Sound power level	Cooling		dBA		55	
Sound pressure level	Cooling	Silent operation/Low/High	dBA	23.0/26.0/40.0	24.0/28.0/41.0	
	Heating	Silent operation/Low/High	dBA	25.0/29.0/40.0	25.0/30.0/42.0	
Control systems	Infrared remote control				ARC470A1	
Outdoor unit				ARXQ	25A	35A
Dimensions	Unit	HeightxWidthxDepth	mm		550x740x337	
Weight	Unit		kg	23.0	25.5	
Sound power level	Cooling Nom.		dBA	61.0	62.0	
Sound pressure level	Cooling High		dBA		47.0	
Operation range	Cooling Ambient	Min.~Max.	°CDB		10~46	
	Heating Ambient	Min.~Max.	°CWB		-15~18	
Refrigerant	Type				R-32	
	GWP			0.500/0.340	675.0	
Piping connections	Charge		kg/TCO2Eq			0.710/0.480
	Liquid OD	mm			6.35	
	Gas OD	mm			9.50	
	Piping length OU - IU Max.	m			20	
	Additional refrigerant charge	kg/m			0.02 (for piping length exceeding 10m)	
	Level difference IU - OU Max.	m			12.0	
Power supply	Phase/Frequency/Voltage	Hz/V			1~/50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)	A			16	

Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawings for electrical data

Multi model application

- › Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- › Up to 3 indoor units can be connected to 1 siesta multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of wall mounted indoor units can be connected
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



2AMXM40-50M9

Indoor units	ATXM20R	ATXM25R	ATXM35R	ATXM50R
2AMXM40M9	•	•	•	•
2AMXM50M9	•	•	•	•
3AMXM52N9	•	•	•	•

More details and final information
can be found by scanning or
clicking the QR codes.



2AMXM-M9



3AMXM-N9

Indoor Unit	2AMXM/3AMXM		2AMXM40M9	2AMXM50M9	3AMXM52N9
Dimensions	Unit	HeightxWidthxDepth	mm	552x852x350	734x974x401
Weight	Unit		kg	36	41
Sound power level	Cooling	Nom.	dBA	60	-
	Heating	Nom.	dBA	62	-
	Cooling		dBA	-	59.0
	Heating		dBA	-	59.0
Sound pressure level	Cooling	Nom./High	dBA	-/46	46.0/-
	Heating	Nom./High	dBA	-/48	47.0/-
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46
	Heating	Ambient	Min.~Max.	°CWB	-15~18
Refrigerant	Type			R-32	
	GWP			675	675.0
Piping connections	Liquid	OD	mm	0.88/0.60	1.80/1.22
	Gas	OD	mm	6.4	6.35
	Piping length	OU - IU	Max. System	9.5	9.50
		Max.	m	20 (1)	25 (1)
	Additional refrigerant charge		kg/m	20	30
	Level difference IU - OU	Max.	m	0.02 (for piping length exceeding 20m)	0.02 (for piping length exceeding 30m)
Power supply	Phase/Frequency/Voltage		Hz/V	15.0	
Current - 50Hz	Maximum fuse amps (MFA)		A	1~/50 /220-230-240	1~/50 /220-240
(1)For one room See separate drawing for operation range See separate drawing for electrical data Contains fluorinated greenhouse gases					

Multi model application

- › Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- › Up to 3 indoor units can be connected to 1 siesta multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Up to 2 indoor units can be connected to 1 siesta multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Different types of wall mounted indoor units can be connected
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



2AMXF-A

Indoor units	ATXF25A	ATXF35A
2AMXF40A	•	•
2AMXF50A	•	•
3AMXF52A9	•	•

More details and final information
can be found by scanning or
clicking the QR codes.



2AMXF-A



3AMXF-A9

Indoor Unit	2AMXF/3AMXF	2AMXF40A	2AMXF50A	3AMXF52A9
Dimensions	Unit HeightxWidthxDepth mm	285x614 x900		-x-x-
Weight	Unit kg	36	41	-
Sound power level	Cooling dBA		-	
Sound pressure level	Cooling Nom. dBA	-		46.0
	Heating Nom. dBA	-		47.0
Operation range	Cooling Ambient Min.~Max. °CDB	~20 (1)		-10 ~46
	Heating Ambient Min.~Max. °CWB		~-	
Refrigerant	Type	0.88	1.15	-
	GWP		-	
	Charge kg/TCO2Eq	0.60 /Expansion valve	0.78 /Expansion valve	1.80 /1.22
Piping connections	Liquid OD mm	2	1	-
	Gas OD mm		1	-
	Piping length OU - IU Max. m	-		25 (1)
	System Chargeless m	-		30
	Additional refrigerant charge kg/m	-		0.02 (for piping length exceeding 30m)
	Level difference IU - OU Max. m	30.0		15.0
Power supply	Phase/Frequency/Voltage Hz/V	1~/50 /220-230-240		-/-
Current - 50Hz	Maximum fuse amps (MFA) A		-	

(1)For one room | See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases



Optimised
for heating

Designed for living: solutions for even the coldest regions


Designed for colder climates, Optimised Heating 4 creates a comfortable interior environment while maintaining excellent energy efficiency ratings.

Reliability

To guarantee the seamless operation of your heating system, even in temperatures as low as -25°C, the Optimised Heating 4 range offers enhanced features.

Easy Installation: long piping

The Daikin Optimised 4 offers a quick and easy installation process, which includes extended piping: This longer piping is specifically adapted to accommodate the thicker walls of Scandinavian buildings, and help contractors cut down on installation time.

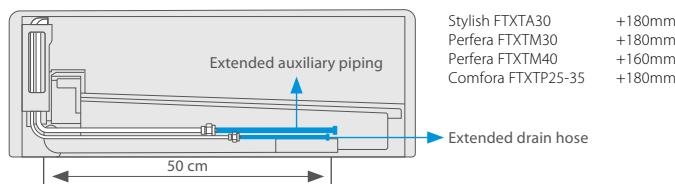


The fireplace scenario

Stylish FTXTA and Perfera FTXTM are flexible and easy to adapt for any room, including spaces that contain additional heat sources, such as a fireplace.

- › If the temperature in the room reaches the desired point set by user, the operation FIREPLACE LOGIC (if activated) will start automatically.
 - › The unit will distribute hot air from the external source across the room using the unit's fan.
 - › The fan speed and the intensity of distribution depends on difference between temperature set by user and actual temperature in the room (in case of big difference between these temperatures the air distribution will be more intensive)
- Measured temperature in the room ≥ set temperature = Thermo off Fan auto adjust according to ΔT
-

The Coanda effect


The **Coanda effect** optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

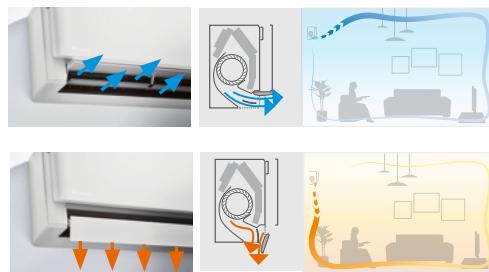

(available in heating and cooling for Stylish FTXTA-BW/BB)

Quiet operation

Stylish uses a **specially designed fan** to optimise airflow for higher energy efficiency at low sound levels. Sound dispersion and noise reduction are the results of a special fan design.

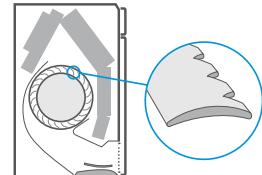


Intelligent thermal sensor

Stylish uses an Intelligent thermal sensor to detect the surface temperature of a room to create a more comfortable climate. After determining the current room temperature, the grid eye sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it.



Dual Airflow

Our floor standing FVXM is ideal for heating comfort thanks to its dual airflow. Wide air flow coverage in both upward and downward directions allowing even air distribution.

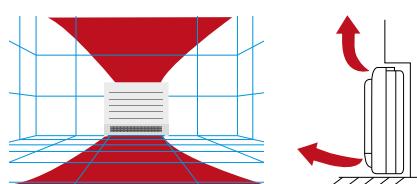

During heating operating, your feet stay warm and the temperature through the room is evenly distributed. Maximum comfort will be ensured.

Bluevolution Range

BLUEEVOLUTION

Type	Model	Product Name	25	30	35	40
Wall mounted	Stylish: Where innovation meets creativity, even at ambient temperatures down to -25°C	FTXTA-BW/BB		A++*(pair only)		
Wall mounted	Perfera: Discreet, modern design for optimal efficiency and comfort thanks to 2-area motion detector sensor	FTXTM-R		A++*(pair only)		A++*(pair only)
Wall mounted	Comfora: Wall mounted unit, providing high efficiency and comfort while reducing the environmental impact	FTXTP-M	A++*(pair only)		A++*(pair only)	
Floor Standing Unit	Design floor standing unit for optimal heating comfort thanks to unique heating features	FVXM-A	A++*(pair only)		A++*(pair only)	
Wall mounted	Wall mounted unit Siesta: providing high efficiency and comfort while reducing the environmental impact	ATXTP-M	A++*(pair only)		A++*(pair only)	

* Space heating - average climate

Wall mounted unit

Where innovation meets creativity, even at ambient temperatures down to -25°C

- › Guaranteed heating capacity at low ambient temperature, down to -25°C
- › When installed close to a heating device (e.g. fire place or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house
- › A compact and functional design suitable for all interiors in a matt black and crystal white finish
- › The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- › The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Seasonal efficiency values up to A+++ in cooling and heating
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)



More details and final information can be found by scanning or clicking the QR codes.



FTXTA-BW



FTXTA-BB



RXTA-B

Efficiency data			FTXTA + RXTA		30BB/BW + 30B
Cooling capacity	Min./Nom./Max.	kW			0.70/3.00/4.50
Heating capacity	Min./Nom./Max.	kW			0.80/3.20/6.90
Power input	Cooling Nom.	kW			0.71
	Heating Nom.	kW			0.66
Space cooling	Energy efficiency class				A++
	Capacity Pdesign	kW			3.00
	SEER				7.63
	Annual energy consumption	kWh/a			138
Space heating (Average climate)	Energy efficiency class				A++
	Capacity Pdesign	kW			2.60
	SCOP/A				5.10
	Annual energy consumption	kWh/a			714
Space heating (Cold climate)	Energy efficiency class				A+
	Capacity Pdesignh	kW			3.80
	Annual energy consumption	kWh/a			1,946
	SCOP/C				4.10
Nominal efficiency	EER				4.20
	COP				4.87
	Annual energy consumption	kWh			357
	Energy labeling Directive Cooling/Heating				A/A
Indoor unit			FTXTA		30BB/BW
Dimensions	Unit	HeightxWidthxDepth	mm		295x798x189
Weight	Unit		kg		11.5
Air filter	Type			Removable/washable	
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High		4.6/5.7/8.3/11.9
		Heating	Silent operation/ Low/Medium/High		5.1/6.0/8.0/11.5
Sound power level	Cooling		dBA		60
	Heating		dBA		60
Sound pressure level	Cooling	Silent operation/Low/High	dBA		20/25/43
	Heating	Silent operation/Low/High	dBA		19/24/41
Control systems	Infrared remote control			ARC466A59	
Outdoor unit			RXTA		30B
Dimensions	Unit	HeightxWidthxDepth	mm		551x763x312
Weight	Unit		kg		38
Sound power level	Cooling Nom.		dBA		61.0
	Heating Nom.		dBA		61.0
Sound pressure level	Cooling Nom.		dBA		48
	Heating Nom.		dBA		49
Operation range	Cooling Ambient	Min.~Max.	°CDB		-10~46
	Heating Ambient	Min.~Max.	°CWB		-25~18
Refrigerant	Type/GWP				R-32/675
	Charge		kg/TCO2Eq		1.1/0.75
Piping connections	Liquid/Gas OD	mm			6.35/9.50
	Piping length OU - IU Max.	m			20
	Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 10m)	
	Level difference IU - OU Max.	m			15
Power supply	Phase/Frequency/Voltage	Hz/V			1~/50 / 220-240
Current - 50Hz	Maximum fuse amps (MFA)	A			16

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for electrical data | See separate drawing for operation range | Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases

Wall mounted unit

Attractive, wall mounted design with perfect indoor air quality down to -25°C

- › Guaranteed heating capacity at low ambient temperature, down to -25°C
- › Seasonal efficiency values up to A+++ in cooling and heating
- › When installed close to a heating device (e.g. fire place or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › 2 area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment; if no people are detected, the unit will automatically switch over to the energy-efficient setting.
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces



- › Quiet operation: down to 19dBA sound pressure level
- › Sleek, unobtrusive air conditioning unit that matches European sensibilities regarding interior design
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency

More details and final information can be found by scanning or clicking the QR codes.



FTXTM-R



RXTM-R


Efficiency data			FTXTM + RXTM			30R + 30R			40R + 40R		
Cooling capacity	Min./Nom./Max.	kW				0.70/3.00/4.50			0.90/4.00/5.10		
Heating capacity	Min./Nom./Max.	kW				0.80/3.20/6.70			1.20/4.00/7.20		
Power input	Cooling	Nom.	kW			0.73			1.08		
	Heating	Nom.	kW			0.60			0.74		
Space cooling	Energy efficiency class						A++				
	Capacity	Pdesign	kW			3.00			4.00		
	SEER					7.60			7.70		
	Annual energy consumption		kWh/a			138			182		
Space heating (Average climate)	Energy efficiency class						A++				
	Capacity	Pdesign	kW			3.00			3.80		
	SCOP/A					5.12			5.30		
	Annual energy consumption		kWh/a			821			1,003		
Space heating (Cold climate)	Energy efficiency class						A*				
	Capacity	Pdesignh	kW			4.38			5.55		
	Annual energy consumption		kWh/a			2,276			2,803		
	SCOP/C					4.04			4.16		
Nominal efficiency	EER					4.10			3.71		
	COP					5.34			5.37		
	Annual energy consumption		kWh			366			539		
	Energy labeling Directive	Cooling/Heating					A/A				
Indoor unit	FTXTM			30R			40R				
Dimensions	Unit	HeightxWidthxDepth	mm			295x778x272			299x998x292		
Weight	Unit		kg			10.0			14.5		
Air filter	Type						Removable/washable				
Fan	Air flow rate	Cooling	Silent operation/Low/Medium/High	m³/min		4.1/5.3/7.8/12.2			4.6/5.8/9.5/15.4		
		Heating	Silent operation/Low/Medium/High	m³/min		4.0/4.9/7.5/12.5			5.9/7.1/10.5/17.5		
Sound power level	Cooling		dBA				60.0				
	Heating		dBA				61.0				
Sound pressure level	Cooling	Silent operation/Low/High	dBA			21.0/25.0/45.0			20.0/24.0/46.0		
	Heating	Silent operation/Low/High	dBA			19.0/22.0/45.0			19.0/22.0/46.0		
Control systems	Infrared remote control			ARC466A75							
Outdoor unit	RXTM			30R			40R				
Dimensions	Unit	HeightxWidthxDepth	mm				551x763x312				
Weight	Unit		kg				38				
Sound power level	Cooling	Nom.	dBA				61.0				
	Heating	Nom.	dBA				61.0				
Sound pressure level	Cooling	Nom.	dBA				48				
	Heating	Nom.	dBA				49				
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-10~46				
	Heating	Ambient	Min.~Max.	°CWB			-25~18				
Refrigerant	Type/GWP						R-32/675				
	Charge		kg/TCO2Eq				1.1/0.74				
Piping connections	Liquid/Gas OD		mm				6.35/9.50				
	Piping length OU - IU	Max.	m				20				
	Additional refrigerant charge		kg/m				0.02 (for piping length exceeding 10m)				
	Level difference IU - OU	Max.	m				15				
Power supply	Phase/Frequency/Voltage		Hz/V				1~/50 / 220-240				
Current - 50Hz	Maximum fuse amps (MFA)		A				16				

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data | Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | See separate drawings for electrical data | Contains fluorinated greenhouse gases

Wall mounted unit

Wall mounted unit providing high efficiency and comfort down to -25°C

- › Guaranteed heating capacity at low ambient temperature, down to -25°C
- › The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- › Seasonal efficiency values: full range A++ in cooling and heating
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Space saving contemporary wall mounted design
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces

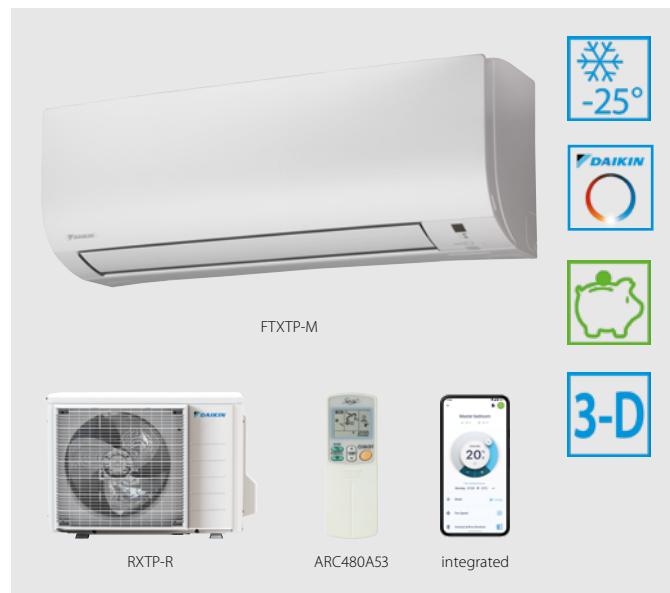

More details and final information can be found by scanning or clicking the QR codes.



FTXTP-M



RXTP-R


Efficiency data			FTXTP + RXTP	25M + 25R	35M + 35R
Cooling capacity	Min./Nom./Max.	kW		0.80/2.50/4.00	0.80/3.50/4.40
Heating capacity	Min./Nom./Max.	kW		1.20/3.20/6.20	1.20/4.00/6.70
Power input	Cooling Nom.	kW		0.57	0.92
	Heating Nom.	kW		0.65	0.90
Space cooling	Energy efficiency class			A**	
	Capacity Pdesign	kW		2.50	3.50
	SEER			7.10	7.20
	Annual energy consumption	kWh/a		123	170
Space heating (Average climate)	Energy efficiency class			A**	
	Capacity Pdesign	kW		2.50	3.00
	SCOP/A			4.93	4.81
	Annual energy consumption	kWh/a		710	873
Space heating (Cold climate)	Energy efficiency class			A	
	Capacity Pdesignh	kW		3.65	4.38
	Annual energy consumption	kWh/a		1,941	2,394
	SCOP/C			3.95	3.84
Nominal efficiency	EER			4.40	3.80
	COP			4.95	4.44
	Annual energy consumption	kWh		284	461
	Energy labeling Directive Cooling/Heating			A/A	
Indoor unit			FTXTP	25M	35M
Dimensions	Unit	HeightxWidthxDepth	mm	286x770x225	
Weight	Unit		kg	9.00	
Air filter	Type			Removable/washable	
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	3.9/5.5/8.3/11.5
		Heating	Silent operation/ Low/Medium/High	m³/min	4.5/5.6/8.7/11.5
Sound power level	Cooling			58	
	Heating			58	
Sound pressure level	Cooling	Silent operation/Low/High	dBA	21/26/43	
	Heating	Silent operation/Low/High	dBA	21/26/43	
Control systems	Infrared remote control			ARC480A53	
Outdoor unit			RXTP	25R	35R
Dimensions	Unit	HeightxWidthxDepth	mm	551x763x312	
Weight	Unit		kg	38	
Sound power level	Cooling Nom.		dBA	61.0	
	Heating Nom.		dBA	61.0	
Sound pressure level	Cooling Nom.		dBA	48	
	Heating Nom.		dBA	49	
Operation range	Cooling Amb.	Min.~Max.	°CDB	-10~46	
	Heating Amb.	Min.~Max.	°CWB	-25~18	
Refrigerant	Type			R-32	
	GWP			675	
	Charge		kg/TCO2Eq	1.1/0.75	
Piping connections	Liquid OD		mm	6.35	
	Gas OD		mm	9.50	
	Piping length OU - IU Max.	m		20	
	Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 10m)	
	Level difference IU - OU Max.	m		15	
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)	A		16	

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data | Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m (horizontal) | Contains fluorinated greenhouse gases

Floor standing unit

Design floor standing unit for optimal heating comfort thanks to unique heating features

- › Seasonal efficiency values up to A++ in heating, resulting in low running costs compared to gas boilers and electric heating
- › Excellent contemporary design
- › Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster than a regular air conditioner (pair only)
- › The floor warming function optimises convection by distributing hot air from the bottom of the unit
- › The heat plus function provides 30 minutes cosy heating by simulating radiant heat
- › Dual air discharge flow for better air distribution
- › Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Quiet operation: down to 19dBA sound pressure level
- › Combinable with 2 and 3 port multi outdoor units (except 2-3MXM68)

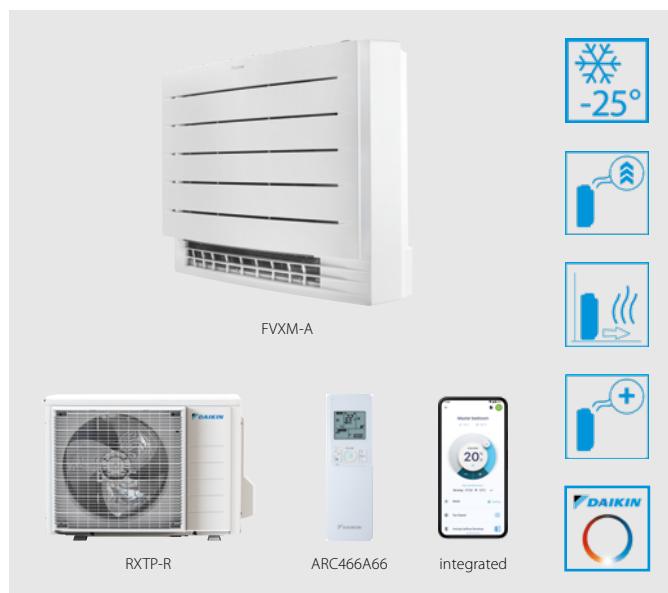

More details and final information can be found by scanning or clicking the QR codes.



FVXM-A



RXTP-R

	FVXM + RXTP			25A + 25R	35A + 35R
Cooling capacity	Min./Nom./Max.	kW		1.40/2.50/4.20	1.40/3.50/4.30
Heating capacity	Min./Nom./Max.	kW		1.20/3.20/5.70	1.20/4.00/6.20
Power input	Cooling Nom.	kW		0.66	1.02
	Heating Nom.	kW		0.83	1.13
Space cooling	Energy efficiency class			A++	
	Capacity Pdesign	kW		2.50	3.50
	SEER			6.50	6.10
	Annual energy consumption	kWh/a		135	201
Space heating (Average climate)	Energy efficiency class			A++	
	Capacity Pdesign	kW		2.50	3.00
	SCOP/A			4.70	4.60
	Annual energy consumption	kWh/a		744	913
Space heating (Cold climate)	Energy efficiency class			A+	
	Capacity Pdesignh	kW		3.65	4.38
	Annual energy consumption	kWh/a		2,032	2,573
	SCOP/C			3.77	3.58
Nominal efficiency	EER			3.81	3.43
	COP			3.86	3.54
	Annual energy consumption	kWh		328	510
	Energy labeling Directive Cooling/Heating			A/A	A/B

	FVXM			25A	35A
Dimensions	Unit	HeightxWidthxDepth	mm	600x750x238	
Weight	Unit		kg	17	
Air filter	Type			Removable/washable	
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.1/4.9/7/8.7
		Heating	Silent operation/ Low/Medium/High	m³/min	4.1/5.6/7.2/9.2
Sound power level	Cooling		dBA	52.0	53.0
	Heating		dBA	52.0	53.0
Sound pressure level	Cooling	Silent operation/Low/High	dBA	20.0/25.0/38.0	20.0/25.0/39.0
	Heating	Silent operation/Low/High	dBA	19.0/25.0/38.0	19.0/25.0/39.0
Control systems	Infrared remote control			ARC466A66	


	RXTP			25R	35R
Dimensions	Unit	HeightxWidthxDepth	mm	551x763x312	
Weight	Unit		kg	38	
Sound power level	Cooling	Nom.	dBA	61.0	
	Heating	Nom.	dBA	61.0	
Sound pressure level	Cooling	Nom.	dBA	48	
	Heating	Nom.	dBA	49	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46
	Heating	Ambient	Min.~Max.	°CWB	-25~18
Refrigerant	Type			R-32	
	GWP			675	
	Charge		kg/TCO2Eq	1.1/0.75	
Piping connections	Liquid OD		mm	6.35	
	Gas OD		mm	9.50	
	Piping length OU - IU	Max.	m	20	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)	
	Level difference IU - OU	Max.	m	15	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	16	

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for electrical data | See separate drawing for operation range | Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m | Contains fluorinated greenhouse gases

Wall mounted unit

Siesta wall mounted unit providing high efficiency and comfort down to -25°C

- › Guaranteed heating capacity at low ambient temperature, down to -25°C
- › The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- › Seasonal efficiency values: full range A++ in cooling and heating
- › Onecta app: control your indoor from any location with an app, via your local network or internet.
- › Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- › Space saving contemporary wall mounted design
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces

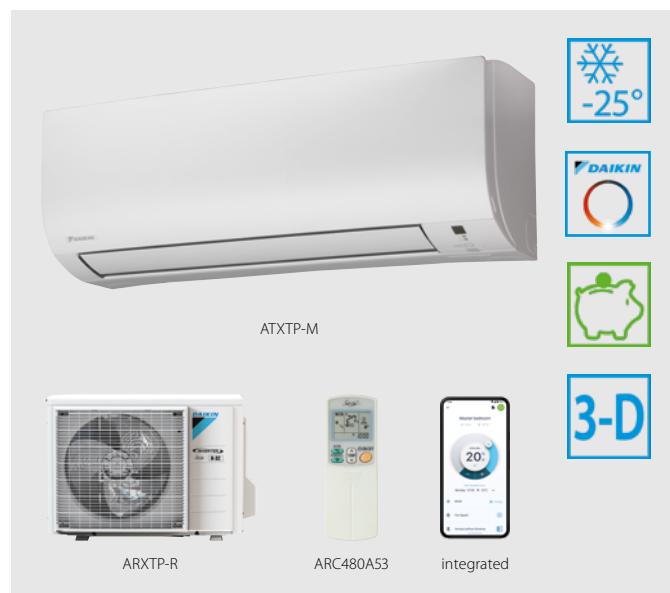

More details and final information can be found by scanning or clicking the QR codes.



ATXTP-M ARXTP-R

Efficiency data			ATXTP + ARXTP	25M + 25R	35M + 35R
Cooling capacity	Min./Nom./Max.	kW	0.80/2.50/4.40	0.80/3.50/4.40	0.80/3.50/4.40
Heating capacity	Min./Nom./Max.	kW	1.20/3.20/6.00	1.20/4.00/6.50	1.20/4.00/6.50
Power input	Cooling Nom.	kW	0.57	0.93	0.93
	Heating Nom.	kW	0.65	0.91	0.91
Space cooling	Energy efficiency class			A++	
	Capacity Pdesign	kW	2.50	3.50	
	SEER		6.98	7.05	
	Annual energy consumption	kWh/a	125	174	
Space heating (Average climate)	Energy efficiency class			A++	
	Capacity Pdesign	kW	2.50	3.00	
	SCOP/A		4.88	4.76	
	Annual energy consumption	kWh/a	717	882	
Space heating (Cold climate)	Energy efficiency class			A++	
	Capacity Pdesignh	kW	3.65	4.38	
	Annual energy consumption	kWh/a	1,960	2,414	
	SCOP/C		3.91	3.81	
Nominal efficiency	EER		4.38	3.75	
	COP		4.90	4.39	
	Annual energy consumption	kWh	285	467	
	Energy labeling Directive Cooling/Heating			A/A	

Indoor unit			ATXTP	25M	35M
Dimensions	Unit	HeightxWidthxDepth	mm	286x770x225	
Weight	Unit		kg	9.00	
Air filter	Type			Removable / washable	
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	3.9/5.5/8.3/11.5	
		Heating	Silent operation/ Low/Medium/High	4.5/5.6/8.7/11.5	
Sound power level	Cooling		dBA	58	
	Heating		dBA	58	
Sound pressure level	Cooling	Silent operation/Low/High	dBA	21/26/43	
	Heating	Silent operation/Low/High	dBA	21/26/43	
Control systems	Infrared remote control			ARC480A53	

Outdoor unit			ARXTP	25R	35R
Dimensions	Unit	HeightxWidthxDepth	mm	551x763x312	
Weight	Unit		kg	38	
Sound power level	Cooling Nom.		dBA	61.0	
	Heating Nom.		dBA	61.0	
Sound pressure level	Cooling Nom.		dBA	48	
	Heating Nom.		dBA	49	
Operation range	Cooling Ambient Min.~Max.	°CDB		-10~46	
	Heating Ambient Min.~Max.	°CWB		-25~18	
Refrigerant	Type			R-32	
	GWP			675	
	Charge	kg/TCO2Eq		1.1/0.75	
Piping connections	Liquid OD	mm		6.35	
	Gas OD	mm		9.50	
	Piping length OU - IU Max.	m		20	
	Additional refrigerant charge	kg/m		0.02 (for piping length exceeding 10m)	
	Level difference IU - OU Max.	m		15	
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50 /220-240	
Current - 50Hz	Maximum fuse amps (MFA)	A		16	

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB; equivalent refrigerant piping: 5m, level difference: 0m. | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data | Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m (horizontal) | Contains fluorinated greenhouse gases

INDOOR UNITS		FTXZ-N	C/FTXA-AW/ BS/BT/BB	FTXJ-AW/S/B	C/FTXM-R	FTXP-M(9)	FTXF-D	FTXC-C	FTXQ-A
Online control system	BRP069B*Onecta app WiFi adapter for smart phone	BRP069B42	Standardly included	Standardly included	Standardly included	BRP069B45	BRP069B45	BRP069B45	BRP069B45
Individual control systems	BRC1E53A/B/C (3)(4)(5) / BRC1H51(9)W/S/K / BRC1H81W/S Premium wired remote control with full-text interface and back-light								
	BRC073A1 (9) Wired remote control (cord for wired remote control required)			●	●	●	●	●	
	BRC2E52C Simplified remote control (with operation mode selector button)								
	BRC3E52C Remote control for hotel use								
	BRC4C65 Infrared remote control								
	BRCW901A03 Extension cord for wired remote control (3m)			●	●	●	●		
	BRCW901A08 Extension cord for wired remote control (8m)			●	●	●	●		
Centralised control systems	DCC601A51 Centralised controller with cloud connection by using the adapter KRP928*	●	●	●	●	●	●		
	DCS302CA51** Central remote control	●	●	●	●	●	●	●	
	DCS301BA51** Unified ON/OFF control	●	●	●	●	●	●	●	
	DCS303A51 Residential central remote control								
	DST301BA51** Schedule timer	●	●	●	●	●	●	●	
	DCM601A51** Intelligent Touch Manager	●	●	●	●	●	●	●	●
Building Management System & Standard protocol interface	EKMBDXA** Modbus interface	●	●	●	●	●	●	●	
	RTD-RA (9)** Modbus gateway	●	●	●	●	●	●	●	
	KLIC-DD (9)** KNX Interface	●	●	●	●	●	●		
Adapters	BRP7A54 (7)(8) Adapter PCB for interlock (key card, ...)								
	KRP1B56 Adapter for wiring								
	KRP413AB1S** Adapter for wiring normal open contact/normal open pulse contact (time clock and other devices to be purchased locally)	●	●	●	●				
	KRP4A54 Adapter for external ON/OFF and monitoring for electrical appendices								
	KRP2A53 Wiring adapter for electrical appendices								
	Installation box for adapter PCBs (when there is no space in the switchbox)								
	KRP980A1 Interface adapter for wired remote control								
	KRP928BB2S** Interface adapter for DIL-net	●	●	●	●	●	●		●
	DTA114A61 Multi tenant								
	KRCS01-4 External wired temperature sensor		●						
	KJB212AA/KJB311A Electrical box with earth terminal (2 blocks / 3 blocks)								
Filters	KAF970A46 Titanium apatite deodorising filter without frame		●	●		●			●
	KAF057A41 Silver particle filter (Ag-ion filter) with frame		●	●					
	KAF046A41 Honeycomb deodorising and air purifying filter with frame	●							
	KAF968A42 Honeycomb deodorising and air purifying filter with frame	●							
	KEK26-1A Noise filter (for electromagnetic use only)								
	BAE20A62/102 Auto-cleaning filter (small/large)								
Others	Anti-theft protection for remote control	KKF936A4	KKF910AA4	KKF910AA4			KKF936A4		
	Wire harness to connect to S21 connector		EKRS21	EKRS21	EKRS21				
	KDT25N32/50/63 Insulation kit for high humidity								

(1) Can be used only in combination with KRP980A1

(2) WLAN installation kit include interface adapter PCB

(3) BRC1E53A: included languages: English, German, French, Italian, Spanish, Dutch, Greek, Russian, Turkish, Portuguese, Polish

(4) BRC1E53B: included languages: English, German, Czech, Hungarian, Romanian, Slovenian, Bulgarian, Slovak, Serbian, Albanian

(5) BRC1E53C: included languages

(6) Installation box for adapter PCB is necessary. Hour meter is field supply and should not be installed inside the equipment.

(7) Installation box for adapter PCB is necessary. They require mounting plate KRP4A96, maximally 2 optional PCBs can be mounted.

(8) Only in combination with simplified remote control BRC2E52C or BRC3E52C.

(9) Wiring adapter supplied by Daikin. Time clock and other devices: to be purchased locally.

(10) Standard there is no remote control delivered with this indoor unit. Wired or infrared control to be ordered separately.

(11) Standard delivered with the unit.

** This indoor unit requires one conversion wire harness (EKRS21) to connect current option which use S21 connector. Wireless Lan as standard of unit is not able to operate with option. When user needs to use option, please turn off function of Wireless Lan.

R-32 and R-410A	R-32	Siesta	R-32		Optimised heating			R-32				
FDXM-F9	C/FVXM-A	FVXM-F	ATXM-R	ATXP-M	ATXF-D/A	ATXC-C	ATXQ-A	FTXTA-AW	FTXTM-R	FTXTP-M	ATXTP-M	FVXM-A
BRP069A81	Standardly included	BRP069B42	Standardly included	BRP069B45	BRP069B45	BRP069B45	BRP069B45	Standardly included	Standardly included	Standardly included	BRP069B41	Standardly included
•												
•(10)								•	•	•	•	•
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
KRP1BA101												
•												
•												
•									•	•		•
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
•												
		KKF910AA4			KKF936A4			KKF910AA4		KKF936A4	KKF936A4	KKF910AA4
	EKRS21		EKRS21					EKRS21				EKRS21
•												

Combination tables

Indoor unit	Cooling capacity [kW]		Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]		Total heating capacity [kW]		
	Room A	Room B	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Min.	Nom.	Max.
1.5	1.50	0.00	1.30	1.50	2.00	0.33	0.31	0.40	1.78	1.70	2.17	2.00	---	1.00	2.00	3.30
2.0	2.00	0.00	1.30	2.00	2.40	0.33	0.44	0.57	1.78	2.38	3.09	3.00	---	1.00	3.00	3.70
2.5	2.50	0.00	1.30	2.50	3.00	0.33	0.61	0.80	1.78	3.33	4.40	3.40	---	1.00	3.40	4.10
3.5	3.50	0.00	1.30	3.50	4.00	0.33	1.04	1.35	1.78	5.71	7.38	3.80	---	1.00	3.80	4.40
1.5+1.5	1.50	1.50	1.50	3.00	3.60	0.31	0.60	0.73	1.67	3.33	4.00	1.75	1.75	1.20	3.50	4.30
1.5+2.0	1.50	2.00	1.50	3.50	4.00	0.31	0.79	0.91	1.67	4.35	4.98	1.63	2.17	1.20	3.80	4.50
1.5+2.5	1.50	2.50	1.50	4.00	4.20	0.31	0.98	1.03	1.67	5.37	5.64	1.58	2.63	1.20	4.20	4.60
1.5+3.5	1.20	2.80	1.50	4.00	4.40	0.31	0.96	1.06	1.67	5.30	5.83	1.26	2.94	1.20	4.20	4.70
2.0+2.0	2.00	2.00	1.50	4.00	4.20	0.31	0.97	1.02	1.67	5.34	5.61	2.10	2.10	1.30	4.20	4.60
2.0+2.5	1.78	2.22	1.50	4.00	4.30	0.31	0.96	1.04	1.67	5.30	5.70	1.87	2.33	1.30	4.20	4.70
2.0+3.5	1.45	2.55	1.50	4.00	4.50	0.31	0.95	1.08	1.67	5.25	5.91	1.53	2.67	1.30	4.20	4.80
2.5+2.5	2.00	2.00	1.50	4.00	4.40	0.31	0.96	1.06	1.67	5.27	5.80	2.10	2.10	1.30	4.20	4.70
2.5+3.5	1.67	2.33	1.50	4.00	4.60	0.31	0.94	1.09	1.67	5.20	5.98	1.75	2.45	1.30	4.20	4.80

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)					
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C
0.26	0.68	1.04	1.43	3.66	5.69	79	---	---	---	---	---	---	---	---	---	---
0.26	0.83	1.24	1.43	4.52	6.78	79	---	---	---	---	---	---	---	---	---	---
0.26	1.02	1.48	1.43	5.59	8.09	79	---	---	---	---	---	---	---	---	---	---
0.26	1.28	1.71	1.43	7.02	9.40	79	---	---	---	---	---	---	---	---	---	---
0.24	0.80	0.99	1.31	4.43	5.45	79	A+++	8.66	3.00	122	A++	4.62	3.00	908	2.50	0.50
0.24	0.88	1.04	1.31	4.85	5.75	79	A+++	8.60	3.50	143	A++	4.61	3.20	972	2.50	0.70
0.24	1.00	1.10	1.31	5.53	6.06	79	A+++	8.55	4.00	164	A++	4.60	3.20	972	2.60	0.60
0.24	0.96	1.12	1.31	5.29	5.92	79	A++	8.26	4.00	170	A++	4.63	3.20	968	2.70	0.50
0.24	0.98	1.08	1.31	5.41	5.93	79	A+++	8.53	4.00	165	A++	4.64	3.20	966	2.60	0.60
0.24	0.97	1.09	1.31	5.36	6.00	79	A+++	8.50	4.00	165	A++	4.60	3.20	973	2.70	0.50
0.24	0.95	1.09	1.31	5.25	6.00	79	A++	8.19	4.00	171	A++	4.60	3.20	974	2.80	0.40
0.24	0.96	1.08	1.31	5.29	5.92	79	A++	8.36	4.00	168	A++	4.60	3.20	974	2.70	0.50
0.24	0.94	1.08	1.31	5.19	5.94	79	A++	8.11	4.00	173	A++	4.61	3.20	971	2.80	0.40

Combination tables

Indoor unit	Cooling capacity [kW]		Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]		Total heating capacity [kW]		
	Room A	Room B	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Min.	Nom.	Max.
1.5	1.50	---	1.40	1.50	2.20	0.31	0.32	0.52	1.53	1.55	2.53	2.00	---	1.10	2.00	3.30
2.0	2.00	---	1.40	2.00	2.90	0.31	0.47	0.77	1.53	2.25	3.76	3.00	---	1.10	3.00	3.70
2.5	2.50	---	1.40	2.50	3.10	0.31	0.67	0.92	1.53	3.27	4.50	3.40	---	1.10	3.40	4.10
3.5	3.50	---	1.40	3.50	4.10	0.31	1.09	1.46	1.53	5.32	7.13	4.00	---	1.10	4.00	4.60
4.2	4.20	---	1.40	4.20	4.70	0.31	1.59	1.75	1.53	7.73	8.57	4.60	---	1.10	4.60	5.00
5.0	5.00	---	1.60	5.00	5.30	0.33	1.30	1.44	1.64	6.33	7.01	5.50	---	1.20	5.50	5.60
1.5+1.5	1.50	1.50	1.60	3.00	4.20	0.33	0.62	0.87	1.64	3.03	4.25	2.00	2.00	1.20	4.00	4.54
1.5+2.0	1.50	2.00	1.60	3.50	4.20	0.33	0.76	0.91	1.64	3.71	4.46	1.89	2.51	1.20	4.40	4.89
1.5+2.5	1.50	2.50	1.60	4.00	4.20	0.33	0.94	0.99	1.64	4.60	4.83	1.80	3.00	1.20	4.80	5.19
1.5+3.5	1.50	3.50	1.60	5.00	5.00	0.33	1.25	1.25	1.64	6.10	6.10	1.56	3.64	1.20	5.20	5.70
1.5+4.2	1.32	3.68	1.60	5.00	5.40	0.33	1.23	1.54	1.64	6.04	6.53	1.47	4.13	1.20	5.60	5.96
1.5+5.0	1.15	3.85	1.80	5.00	5.50	0.33	1.23	1.68	1.64	5.99	6.59	1.29	4.31	1.20	5.60	6.16
2.0+2.0	2.00	2.00	1.80	4.00	5.00	0.33	0.94	1.28	1.64	4.60	5.75	2.60	2.60	1.20	5.20	5.70
2.0+2.5	2.00	2.50	1.80	4.50	5.10	0.33	1.07	1.31	1.64	5.23	5.93	2.49	3.11	1.20	5.60	5.80
2.0+3.5	1.82	3.18	1.80	5.00	5.40	0.33	1.24	1.49	1.64	6.05	6.54	2.04	3.56	1.20	5.60	5.90
2.0+4.2	1.61	3.39	1.80	5.00	5.50	0.33	1.23	1.51	1.64	6.01	6.62	1.81	3.79	1.20	5.60	6.00
2.0+5.0	1.43	3.57	1.80	5.00	5.50	0.33	1.22	1.44	1.64	5.95	6.55	1.60	4.00	1.20	5.60	6.20
2.5+2.5	2.50	2.50	1.80	5.00	5.30	0.33	1.25	1.42	1.64	6.10	6.47	2.80	2.80	1.20	5.60	5.80
2.5+3.5	2.08	2.92	1.80	5.00	5.40	0.33	1.23	1.43	1.64	6.02	6.51	2.33	3.27	1.20	5.60	6.00
2.5+4.2	1.87	3.13	1.80	5.00	5.50	0.33	1.22	1.45	1.64	5.98	6.58	2.09	3.51	1.20	5.60	6.10
2.5+5.0	1.67	3.33	1.80	5.00	5.50	0.33	1.21	1.38	1.64	5.92	6.52	1.87	3.73	1.30	5.60	6.30
3.5+3.5	2.50	2.50	1.80	5.00	5.40	0.33	1.22	1.42	1.64	5.95	6.43	2.80	2.80	1.30	5.60	6.10
3.5+4.2	2.27	2.73	1.80	5.00	5.50	0.33	1.21	1.40	1.64	5.90	6.49	2.55	3.05	1.30	5.60	6.20
3.5+5.0	2.06	2.94	1.80	5.00	5.50	0.33	1.20	1.34	1.64	5.85	6.44	2.31	3.29	1.30	5.60	6.40
4.2+4.2	2.50	2.50	1.80	5.00	5.50	0.33	1.20	1.38	1.64	5.88	6.47	2.80	2.80	1.30	5.60	6.30

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)					
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C
0.29	0.68	0.95	1.44	3.31	4.66	89	---	---	---	---	---	---	---	---	---	---
0.27	0.82	1.13	1.33	3.99	5.52	89	---	---	---	---	---	---	---	---	---	---
0.25	0.99	1.34	1.23	4.81	6.54	89	---	---	---	---	---	---	---	---	---	---
0.25	1.24	1.53	1.23	6.03	7.46	89	---	---	---	---	---	---	---	---	---	---
0.23	1.49	1.81	1.12	7.27	8.85	89	---	---	---	---	---	---	---	---	---	---
0.23	1.35	1.51	1.12	6.56	9.01	89	---	---	---	---	---	---	---	---	---	---
0.23	0.87	0.99	1.12	4.27	4.85	89	A+++	8.80	3.00	120	A++	4.79	3.30	965	2.80	0.50
0.23	1.02	1.13	1.12	4.97	5.53	89	A+++	8.74	3.50	141	A++	4.66	3.80	1140	3.00	0.80
0.23	1.18	1.27	1.12	5.75	6.22	89	A+++	8.64	4.00	162	A++	4.64	3.80	1146	3.20	0.60
0.25	1.28	1.40	1.23	6.25	6.86	89	A+++	8.52	5.00	206	A++	4.61	4.00	1214	3.40	0.60
0.25	1.37	1.46	1.23	6.71	7.15	89	A+++	8.55	5.00	205	A++	4.62	4.10	1241	3.40	0.70
0.25	1.37	1.50	1.23	6.68	7.35	89	A+++	8.50	5.00	206	A++	4.63	4.20	1269	3.40	0.80
0.23	1.27	1.40	1.12	6.22	6.82	89	A+++	8.71	4.00	161	A++	4.61	4.00	1214	3.40	0.60
0.23	1.37	1.42	1.12	6.68	6.92	89	A+++	8.67	4.50	182	A++	4.61	4.10	1244	3.40	0.70
0.25	1.36	1.43	1.23	6.65	7.01	89	A+++	8.54	5.00	205	A++	4.61	4.20	1275	3.40	0.80
0.25	1.36	1.46	1.23	6.63	7.11	89	A+++	8.54	5.00	205	A++	4.63	4.20	1268	3.40	0.80
0.25	1.35	1.50	1.23	6.60	7.31	89	A+++	8.51	5.00	208	A++	4.68	4.20	1255	3.40	0.80
0.23	1.37	1.42	1.12	6.71	6.95	89	A+++	8.53	5.00	205	A++	4.61	4.20	1275	3.40	0.80
0.25	1.38	1.48	1.23	6.76	7.25	89	A+++	8.56	5.00	205	A++	4.62	4.20	1272	3.40	0.80
0.25	1.39	1.51	1.23	6.79	7.40	89	A+++	8.57	5.00	204	A++	4.65	4.20	1265	3.40	0.80
0.25	1.41	1.58	1.23	6.88	7.74	89	A+++	8.52	5.00	206	A++	4.71	4.20	1249	3.40	0.80
0.25	1.40	1.52	1.23	6.83	7.44	89	A+++	8.57	5.00	205	A++	4.66	4.20	1262	3.40	0.80
0.25	1.40	1.55	1.23	6.84	7.58	89	A+++	8.60	5.00	204	A++	4.67	4.20	1258	3.40	0.80
0.25	1.42	1.63	1.23	6.95	7.95	89	A+++	8.52	5.00	206	A++	4.75	4.20	1238	3.40	0.80
0.25	1.41	1.58	1.23	6.88	7.74	89	A+++	8.56	5.00	205	A++	4.70	4.20	1251	3.40	0.80

Combination tables

Indoor unit	Cooling capacity [kW]			Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]			Total heating capacity [kW]		
	Room A	Room B	Room C	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Min.	Nom.	Max.
1.5	1.60	---	---	1.52	1.60	2.49	0.40	0.42	0.59	1.82	1.98	2.71	2.70	---	---	1.47	2.70	4.08
2.0	2.00	---	---	1.65	2.00	3.00	0.41	0.43	0.67	1.89	2.08	3.08	2.72	---	---	1.48	2.72	4.09
2.5	2.50	---	---	1.74	2.50	3.44	0.44	0.44	0.82	2.00	2.62	3.77	3.40	---	---	1.44	3.40	4.30
3.5	3.50	---	---	1.93	3.50	4.86	0.46	0.46	1.43	2.09	3.84	6.53	4.30	---	---	1.45	4.30	4.90
4.2	4.20	---	---	1.93	4.20	5.33	0.46	0.46	1.43	2.09	3.93	6.56	4.32	---	---	1.44	4.32	5.70
5.0	5.00	---	---	1.94	5.00	6.03	0.44	0.44	2.13	2.00	7.20	9.77	5.60	---	---	1.66	5.60	6.90
6.0	6.00	---	---	1.94	6.00	6.51	0.44	0.44	2.13	2.00	7.29	9.77	7.90	---	---	1.88	7.90	8.91
1.5+1.5	1.50	1.50	---	1.95	3.00	4.79	0.40	0.51	1.15	1.81	2.34	5.25	2.65	2.65	---	1.65	5.30	7.38
1.5+2.0	1.50	2.00	---	1.95	3.50	4.96	0.40	0.62	1.22	1.81	2.84	5.58	2.44	3.26	---	1.65	5.70	7.76
1.5+2.5	1.50	2.50	---	1.95	4.00	5.28	0.40	0.75	1.36	1.81	3.44	6.23	2.29	3.81	---	1.65	6.10	7.95
1.5+3.5	1.50	3.50	---	1.95	5.00	6.17	0.39	1.04	1.83	1.77	4.76	8.39	2.07	4.83	---	1.80	6.90	8.50
1.5+4.2	1.50	4.20	---	1.95	5.70	6.39	0.39	1.27	1.96	1.77	5.82	8.97	1.97	5.53	---	1.80	7.50	8.85
1.5+5.0	1.50	5.00	---	1.95	6.50	7.08	0.38	1.50	2.23	1.73	6.87	10.22	1.89	6.31	---	2.18	8.20	10.38
1.5+6.0	1.36	5.44	---	1.96	6.80	7.59	0.37	1.62	2.36	1.68	7.42	10.79	1.72	6.88	---	2.46	8.60	10.58
2.0+2.0	2.00	2.00	---	1.95	4.00	5.12	0.40	0.75	1.29	1.81	3.44	5.91	3.25	3.25	---	1.65	6.50	7.95
2.0+2.5	2.00	2.50	---	1.95	4.50	5.44	0.40	0.89	1.43	1.81	4.08	6.56	3.07	3.83	---	1.65	6.90	8.12
2.0+3.5	2.00	3.50	---	1.95	5.50	6.30	0.39	1.17	1.91	1.77	5.36	8.76	2.73	4.77	---	1.80	7.50	8.67
2.0+4.2	2.00	4.20	---	1.95	6.20	6.51	0.39	1.43	2.05	1.77	6.55	9.37	2.58	5.42	---	1.80	8.00	9.03
2.0+5.0	1.94	4.86	---	1.95	6.80	7.26	0.38	1.59	2.36	1.73	7.28	10.79	2.46	6.14	---	2.18	8.60	10.56
2.0+6.0	1.70	5.10	---	1.96	6.80	7.71	0.37	1.61	2.45	1.68	7.37	11.20	2.15	6.45	---	2.46	8.60	10.75
2.5+2.5	2.50	2.50	---	1.95	5.00	6.10	0.41	1.01	1.78	1.89	4.63	8.15	3.60	3.60	---	1.65	7.20	8.49
2.5+3.5	2.50	3.50	---	1.95	6.00	6.57	0.40	1.29	2.11	1.81	5.91	9.65	3.29	4.61	---	1.89	7.90	9.03
2.5+4.2	2.50	4.20	---	1.95	6.70	6.95	0.40	1.51	2.38	1.81	6.92	10.88	3.10	5.20	---	1.89	8.30	9.29
2.5+5.0	2.27	4.53	---	1.95	6.80	7.37	0.37	1.50	2.45	1.68	6.87	11.20	2.87	5.73	---	2.27	8.60	10.68
2.5+6.0	2.00	4.80	---	1.96	6.80	7.71	0.35	1.48	2.45	1.60	6.78	11.20	2.53	6.07	---	2.55	8.60	10.88
3.5+3.5	3.40	3.40	---	1.95	6.80	7.13	0.38	1.45	2.37	1.73	6.64	10.83	4.30	4.30	---	2.17	8.60	9.38
3.5+4.2	3.09	3.71	---	1.95	6.80	7.24	0.38	1.45	2.46	1.73	6.64	11.24	3.91	4.69	---	2.17	8.60	9.47
3.5+5.0	2.80	4.00	---	1.95	6.80	7.76	0.35	1.42	2.78	1.60	6.50	12.71	3.54	5.06	---	2.56	8.60	10.90
3.5+6.0	2.51	4.29	---	2.26	6.80	8.07	0.40	1.40	2.72	1.81	6.41	12.46	3.17	5.43	---	2.74	8.60	11.01
4.2+4.2	3.40	3.40	---	1.95	6.80	7.14	0.38	1.44	2.37	1.73	6.60	10.83	4.30	4.30	---	2.17	8.60	9.56
4.2+5.0	3.10	3.70	---	1.95	6.80	7.77	0.35	1.41	2.78	1.60	6.46	12.71	3.93	4.67	---	2.56	8.60	10.91
4.2+6.0	2.80	4.00	---	2.26	6.80	8.08	0.40	1.40	2.72	1.81	6.41	12.46	3.54	5.06	---	2.74	8.60	11.02

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling			Seasonal data heating (average climate)						Seasonal data heating (warm climate)						
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.42	0.72	1.22	1.91	3.35	5.59	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.43	0.73	1.28	1.95	3.39	5.64	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.42	1.02	1.37	1.91	4.72	6.08	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.40	1.41	1.75	1.82	6.50	7.15	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.40	1.40	2.04	1.82	6.46	7.15	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.39	1.82	2.59	1.78	8.43	8.70	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.37	2.62	2.64	1.69	12.13	12.08	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.36	1.19	1.83	1.63	5.45	8.38	95	A++	7.29	3.00	144	A	3.85	3.80	1380	3.07	0.73	A+++	6.08	4.40	1012	4.40	0
0.36	1.31	1.99	1.63	6.00	9.09	95	A++	7.53	3.50	163	A	3.85	3.80	1380	3.08	0.72	A+++	6.10	4.40	1010	4.40	0
0.36	1.43	2.06	1.63	6.55	9.43	95	A++	7.75	4.00	181	A	3.87	3.80	1373	3.09	0.71	A+++	6.11	4.40	1008	4.40	0
0.37	1.69	2.35	1.68	7.74	10.74	95	A++	7.80	5.00	225	A	3.86	4.30	1558	3.39	0.91	A+++	6.13	4.40	1005	4.40	0
0.37	1.90	2.57	1.68	8.70	11.75	95	A++	7.84	5.70	255	A	3.88	4.30	1548	3.40	0.90	A+++	6.14	4.40	1003	4.40	0
0.45	2.13	2.91	2.06	9.75	13.31	95	A++	7.86	6.50	290	A	3.87	4.50	1628	3.55	0.95	A+++	6.17	4.40	998	4.40	0
0.48	2.28	2.67	2.19	10.44	12.21	95	A++	7.81	6.80	305	A	3.91	4.80	1717	3.73	1.07	A+++	6.21	4.40	992	4.40	0
0.36	1.37	2.31	1.63	6.28	9.47	95	A++	7.75	4.00	181	A	3.91	3.80	1361	3.09	0.71	A+++	6.10	4.40	1009	4.40	0
0.36	1.52	2.32	1.63	6.96	9.81	95	A++	7.80	4.50	202	A	3.92	3.80	1354	3.10	0.70	A+++	6.12	4.40	1007	4.40	0
0.37	1.75	2.43	1.68	8.01	11.12	95	A++	7.91	5.50	244	A	3.86	4.30	1558	3.39	0.91	A+++	6.13	4.40	1004	4.40	0
0.37	1.98	2.66	1.68	9.07	12.17	95	A++	7.88	6.20	276	A	3.88	4.30	1550	3.40	0.90	A+++	6.15	4.40	1002	4.40	0
0.45	2.26	3.00	2.06	10.35	13.73	95	A++	7.78	6.80	306	A	3.90	4.50	1612	3.55	0.95	A+++	6.19	4.40	996	4.40	0
0.48	2.24	2.74	2.19	10.26	12.55	95	A++	7.71	6.80	309	A	3.93	4.80	1710	3.73	1.07	A+++	6.22	4.40	990	4.40	0
0.36	1.62	2.36	1.63	7.42	10.78	95	A++	7.81	5.00	224	A	3.85	4.00	1455	3.22	0.78	A+++	6.14	4.40	1004	4.40	0
0.38	1.91	2.66	1.72	8.75	12.17	95	A++	7.94	6.00	265	A	3.83	4.30	1569	3.40	0.90	A+++	6.13	4.40	1004	4.40	0
0.38	2.11	2.82	1.72	9.66	12.93	95	A++	7.99	6.70	294	A	3.86	4.30	1559	3.41	0.89	A+++	6.14	4.40	1003	4.40	0
0.46	2.24	3.09	2.11	10.26	14.15	95	A++	7.93	6.80	300	A	3.84	4.50	1637	3.59	0.91	A+++	6.14	4.40	1003	4.40	0
0.50	2.22	2.77	2.28	10.17	12.67	95	A++	7.90	6.80	301	A	3.91	4.80	1716	3.80	1.00	A+++	6.14	4.40	1002	4.40	0
0.42	2.26	2.86	1.94	10.35	13.09	95	A++	8.02	6.80	297	A+	4.00	4.80	1680	3.73	1.07	A+++	6.14	4.40	1003	4.40	0
0.42	2.26	2.91	1.94	10.35	13.31	95	A++	8.00	6.80	298	A+	4.01	4.80	1675	3.75	1.05	A+++	6.14	4.40	1002	4.40	0
0.51	2.22	3.13	2.32	10.17	14.32	95	A++	7.92	6.80	301	A+	4.01	4.80	1675	3.78	1.02	A+++	6.14	4.40	1003	4.40	0
0.52	2.21	2.76	2.37	10.12	12.63	95	A++	7.89	6.80	302	A+	4.06	4.80	1652	3.79	1.01	A+++	6.14	4.40	1002	4.40	0
0.42	2.22	2.94	1.94	10.17	13.47	95	A++	7.98	6.80	298	A+	4.00	4.80	1679	3.76	1.04	A+++	6.16	4.40	1000	4.40	0
0.51	2.21	3.19	2.32	10.12	14.61	95	A++	7.90	6.80	302	A	3.93	5.20	1851	4.01	1.19	A+++	6.15	4.40	1001	4.40	0
0.51	2.20	2.79	2.32	10.07	12.76	95	A++	7.87	6.80	303	A+	4.03	5.20	1804	4.02	1.18	A+++	6.15	4.40	1002	4.40	0

Combination tables

Indoor unit	Cooling capacity [kW]			Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]			Total heating capacity [kW]		
	Room A	Room B	Room C	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Min.	Nom.	Max.
1.5	1.50	---	---	1.40	1.50	2.20	0.32	0.35	0.46	1.52	1.63	2.20	2.30	---	---	1.10	2.30	3.30
2.0	2.00	---	---	1.40	2.00	2.90	0.32	0.48	0.71	1.52	2.28	3.40	2.70	---	---	1.10	2.70	3.70
2.5	2.50	---	---	1.40	2.50	3.10	0.32	0.64	0.82	1.52	3.05	3.90	3.40	---	---	1.10	3.40	4.10
3.5	3.50	---	---	1.40	3.50	4.10	0.32	0.98	1.19	1.52	4.68	5.70	4.20	---	---	1.10	4.20	4.80
1.5+1.5	1.50	1.50	---	1.60	3.00	4.20	0.34	0.59	1.14	1.63	2.82	5.44	1.80	1.80	---	1.20	3.60	5.00
1.5+2.0	1.50	2.00	---	1.60	3.50	4.20	0.34	0.71	1.12	1.63	3.40	5.33	1.54	2.06	---	1.20	3.60	5.00
1.5+2.5	1.50	2.50	---	1.60	4.00	4.20	0.34	0.86	1.10	1.63	4.11	5.33	1.50	2.50	---	1.20	4.00	5.00
1.5+3.5	1.20	2.80	---	1.60	4.00	4.40	0.34	0.85	1.13	1.63	4.07	5.41	1.38	3.22	---	1.20	4.60	5.00
2.0+2.0	2.00	2.00	---	1.60	4.00	4.50	0.34	0.84	1.09	1.63	4.02	5.22	2.30	2.30	---	1.20	4.60	5.00
2.0+2.5	1.78	2.22	---	1.60	4.00	4.50	0.34	0.83	1.07	1.63	3.97	5.22	2.04	2.56	---	1.20	4.60	5.00
2.0+3.5	1.45	2.55	---	1.60	4.00	4.50	0.34	0.83	1.03	1.63	3.97	5.22	1.67	2.93	---	1.20	4.60	5.00
2.5+2.5	2.00	2.00	---	1.60	4.00	4.50	0.34	0.83	1.05	1.63	3.97	5.22	2.30	2.30	---	1.20	4.60	5.00
2.5+3.5	1.67	2.33	---	1.60	4.00	4.60	0.34	0.82	1.03	1.63	3.92	4.93	1.92	2.68	---	1.20	4.60	5.00
3.5+3.5	2.00	2.00	---	1.60	4.00	4.60	0.34	0.82	1.01	1.63	3.92	4.84	2.30	2.30	---	1.20	4.60	5.00
1.5+1.5+1.5	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.78	0.98	1.74	3.73	4.68	1.53	1.53	1.53	1.30	4.60	5.10
1.5+1.5+2.0	1.20	1.20	1.60	1.70	4.00	4.60	0.36	0.77	0.96	1.74	3.68	4.68	1.38	1.38	1.84	1.30	4.60	5.10
1.5+1.5+2.5	1.09	1.09	1.82	1.70	4.00	4.60	0.36	0.77	0.94	1.74	3.68	4.68	1.25	1.25	2.09	1.30	4.60	5.10
1.5+1.5+3.5	0.92	0.92	2.15	1.70	4.00	4.60	0.36	0.76	0.90	1.74	3.64	4.68	1.06	1.06	2.48	1.30	4.60	5.10
1.5+2.0+2.0	1.09	1.45	1.45	1.70	4.00	4.60	0.36	0.77	0.92	1.74	3.68	4.68	1.25	1.67	1.67	1.30	4.60	5.10
1.5+2.0+2.5	1.00	1.33	1.67	1.70	4.00	4.60	0.36	0.76	0.91	1.74	3.64	4.68	1.15	1.53	1.92	1.30	4.60	5.10
1.5+2.0+3.5	0.86	1.14	2.00	1.70	4.00	4.60	0.36	0.76	0.89	1.74	3.64	4.68	0.99	1.31	2.30	1.30	4.60	5.10
1.5+2.5+2.5	0.92	1.54	1.54	1.70	4.00	4.60	0.36	0.76	0.87	1.74	3.64	4.68	1.06	1.77	1.77	1.30	4.60	5.10
2.0+2.0+2.0	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.76	0.85	1.74	3.64	4.68	1.53	1.53	1.53	1.30	4.60	5.10
2.0+2.0+2.5	1.23	1.23	1.54	1.70	4.00	4.60	0.36	0.76	0.83	1.74	3.64	4.68	1.42	1.42	1.77	1.30	4.60	5.10
2.0+2.5+2.5	1.14	1.43	1.43	1.70	4.00	4.60	0.36	0.75	0.81	1.74	3.59	4.68	1.31	1.64	1.64	1.30	4.60	5.10

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)				Seasonal data heating (warm climate)							
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.30	0.60	0.82	1.38	2.77	3.83	91	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.30	0.76	1.23	1.38	3.51	5.75	91	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.30	1.01	1.28	1.38	4.68	5.96	91	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.30	1.42	1.71	1.38	6.60	7.98	91	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.32	0.69	1.30	1.49	3.23	6.07	91	A+++	8.64	3.00	122	A++	4.60	3.60	1096	3.10	0.5	A+++	5.35	3.80	993	3.80	0
0.32	0.69	1.28	1.49	3.23	5.96	91	A+++	8.59	3.50	143	A++	4.62	3.60	1091	3.10	0.5	A+++	5.39	3.80	987	3.80	0
0.32	0.86	1.26	1.49	4.03	5.96	91	A+++	8.51	4.00	164	A+	4.39	4.20	1338	3.50	0.7	A+++	5.35	3.80	995	3.80	0
0.32	0.98	1.22	1.49	4.59	5.96	91	A+++	8.50	4.00	165	A+	4.28	4.80	1570	4.00	0.8	A+++	5.37	3.80	990	3.80	0
0.32	0.97	1.25	1.49	4.54	5.85	91	A+++	8.52	4.00	165	A+	4.24	4.80	1582	3.90	0.9	A+++	5.40	3.80	985	3.80	0
0.32	0.98	1.23	1.49	4.59	5.85	91	A+++	8.52	4.00	165	A+	4.27	4.80	1572	3.90	0.9	A+++	5.38	3.80	988	3.80	0
0.32	0.97	1.19	1.49	4.54	5.85	91	A+++	8.50	4.00	165	A+	4.30	4.80	1560	4.00	0.8	A+++	5.36	3.80	992	3.80	0
0.32	0.96	1.21	1.49	4.49	5.85	91	A+++	8.51	4.00	165	A+	4.34	4.80	1548	3.90	0.9	A+++	5.38	3.80	988	3.80	0
0.32	0.95	1.17	1.49	4.45	5.85	91	A+++	8.50	4.00	165	A+	4.37	4.80	1537	4.00	0.8	A+++	5.36	3.80	991	3.80	0
0.32	0.94	1.15	1.49	4.40	5.75	91	A+++	8.50	4.00	165	A+	4.38	5.00	1598	4.10	0.9	A+++	5.34	3.80	996	3.80	0
0.32	0.89	1.02	1.49	4.17	4.79	91	A+++	8.55	4.00	164	A++	4.65	5.00	1505	4.10	0.9	A+++	5.45	3.80	976	3.80	0
0.32	0.89	1.01	1.49	4.17	4.72	91	A+++	8.55	4.00	164	A++	4.63	5.00	1511	4.10	0.9	A+++	5.42	3.80	981	3.80	0
0.32	0.89	0.99	1.49	4.17	4.63	91	A+++	8.54	4.00	164	A++	4.61	5.00	1517	4.10	0.9	A+++	5.40	3.80	986	3.80	0
0.32	0.88	0.97	1.49	4.12	4.53	91	A+++	8.53	4.00	165	A++	4.61	5.00	1518	4.10	0.9	A+++	5.37	3.80	990	3.80	0
0.32	0.88	0.95	1.49	4.12	4.44	91	A+++	8.53	4.00	164	A++	4.60	5.00	1520	4.10	0.9	A+++	5.38	3.80	989	3.80	0
0.32	0.87	0.93	1.49	4.07	4.35	91	A+++	8.54	4.00	164	A++	4.60	5.00	1521	4.10	0.9	A+++	5.37	3.80	991	3.80	0
0.32	0.87	0.91	1.49	4.07	4.25	91	A+++	8.53	4.00	165	A++	4.62	5.00	1515	4.10	0.9	A+++	5.37	3.80	991	3.80	0
0.32	0.88	0.87	1.49	4.12	4.07	91	A+++	8.53	4.00	165	A++	4.62	5.00	1513	4.10	0.9	A+++	5.36	3.80	992	3.80	0
0.32	0.87	0.89	1.49	4.07	4.16	91	A+++	8.52	4.00	165	A++	4.60	5.00	1521	4.10	0.9	A+++	5.35	3.80	994	3.80	0
0.32	0.87	0.86	1.49	4.07	4.02	91	A+++	8.51	4.00	165	A++	4.62	5.00	1515	4.10	0.9	A+++	5.35	3.80	994	3.80	0
0.32	0.86	0.84	1.49	4.03	3.93	91	A+++	8.50	4.00	165	A++	4.63	5.00	1512	4.10	0.9	A+++	5.34	3.80	996	3.80	0

Combination tables

Indoor unit	Cooling capacity [kW]			Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]			Total heating capacity [kW]		
	Room A	Room B	Room C	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Min.	Nom.	Max.
1.5	1.50	---	---	1.40	1.50	2.40	0.34	0.36	0.63	1.50	1.62	2.86	2.30	---	---	1.10	2.30	3.40
2.0	2.00	---	---	1.60	2.00	3.00	0.36	0.48	0.78	1.60	2.17	3.51	2.70	---	---	1.10	2.70	3.80
2.5	2.50	---	---	1.60	2.50	3.20	0.36	0.64	0.87	1.62	2.89	3.92	3.40	---	---	1.10	3.40	4.20
3.5	3.50	---	---	1.60	3.50	4.20	0.37	0.98	1.30	1.63	4.43	5.88	4.20	---	---	1.10	4.20	4.80
4.2	4.20	---	---	1.60	4.20	4.80	0.37	1.21	1.55	1.63	5.47	7.04	4.80	---	---	1.10	4.80	5.60
5.0	5.00	---	---	1.60	5.00	5.40	0.35	1.76	2.03	1.55	7.94	9.18	---	5.80	---	1.10	5.80	6.80
1.5+1.5	1.50	1.50	---	1.70	3.00	4.70	0.35	0.55	1.32	1.55	2.50	5.98	1.80	1.80	---	1.20	3.60	5.80
1.5+2.0	1.50	2.00	---	1.70	3.50	4.70	0.35	0.66	1.30	1.55	2.99	5.88	1.71	2.29	---	1.20	4.00	5.80
1.5+2.5	1.50	2.50	---	1.70	4.00	5.00	0.35	0.78	1.92	1.55	3.54	8.66	1.69	2.81	---	1.20	4.50	6.90
1.5+3.5	1.50	3.50	---	1.70	5.00	6.00	0.35	1.06	2.17	1.55	4.81	9.80	1.65	3.85	---	1.20	5.50	7.00
1.5+4.2	1.37	3.83	---	1.70	5.20	6.10	0.35	1.10	2.26	1.55	4.99	10.21	1.58	4.42	---	1.20	6.00	7.00
1.5+5.0	1.20	4.00	---	1.80	5.20	6.30	0.37	1.10	2.28	1.68	4.99	10.31	1.57	5.23	---	1.30	6.80	7.20
2.0+2.0	2.00	2.00	---	1.80	4.00	5.10	0.37	0.85	1.91	1.68	3.85	8.66	3.40	3.40	---	1.20	6.80	7.00
2.0+2.5	2.00	2.50	---	1.80	4.50	5.30	0.37	0.95	1.89	1.68	4.31	8.56	3.02	3.78	---	1.20	6.80	7.00
2.0+3.5	1.89	3.31	---	1.80	5.20	6.30	0.37	1.10	2.30	1.68	4.99	10.38	2.47	4.33	---	1.20	6.80	7.10
2.0+4.2	1.68	3.52	---	1.80	5.20	6.30	0.37	1.09	2.25	1.68	4.94	10.18	2.19	4.61	---	1.20	6.80	7.10
2.0+5.0	1.49	3.71	---	1.80	5.20	6.50	0.37	1.09	2.19	1.68	4.94	9.89	1.94	4.86	---	1.40	6.80	7.20
2.5+2.5	2.50	2.50	---	1.80	5.00	6.00	0.37	1.04	2.23	1.68	4.72	10.09	3.40	3.40	---	1.20	6.80	7.00
2.5+3.5	2.17	3.03	---	1.80	5.20	6.10	0.37	1.09	2.21	1.68	4.94	10.00	2.83	3.97	---	1.30	6.80	7.20
2.5+4.2	1.94	3.26	---	1.80	5.20	6.40	0.37	1.09	2.30	1.68	4.94	10.41	2.54	4.26	---	1.30	6.80	7.20
2.5+5.0	1.73	3.47	---	1.80	5.20	6.50	0.37	1.06	2.14	1.68	4.81	9.68	2.27	4.53	---	1.40	6.80	7.40
3.5+3.5	2.60	2.60	---	1.80	5.20	6.40	0.37	1.08	2.28	1.68	4.90	10.31	3.40	3.40	---	1.40	6.80	7.30
3.5+4.2	2.36	2.84	---	1.80	5.20	6.40	0.37	1.08	2.26	1.68	4.90	10.21	3.09	3.71	---	1.40	6.80	7.30
3.5+5.0	2.14	3.06	---	1.80	5.20	6.60	0.37	1.06	2.19	1.68	4.81	9.89	2.80	4.00	---	1.45	6.80	7.50
4.2+4.2	2.60	2.60	---	1.80	5.20	6.50	0.37	1.07	2.24	1.68	4.85	10.11	3.40	3.40	---	1.40	6.80	7.30
1.5+1.5+1.5	1.50	1.50	1.50	1.80	4.50	6.40	0.37	0.90	2.18	1.65	4.08	9.86	2.27	2.27	2.27	1.30	6.80	8.00
1.5+1.5+2.0	1.44	1.44	1.92	1.80	4.80	6.40	0.37	1.02	2.16	1.65	4.61	9.78	2.04	2.04	2.72	1.30	6.80	8.00
1.5+1.5+2.5	1.42	1.42	2.36	1.80	5.20	6.70	0.37	1.09	2.23	1.65	4.94	10.10	1.85	1.85	3.09	1.30	6.80	8.00
1.5+1.5+3.5	1.20	1.20	2.80	1.90	5.20	6.80	0.37	1.09	2.28	1.65	4.94	10.30	1.57	1.57	3.66	1.40	6.80	8.10
1.5+1.5+4.2	1.08	1.08	3.03	1.90	5.20	6.80	0.37	1.08	2.26	1.65	4.90	10.20	1.42	1.42	3.97	1.40	6.80	8.10
1.5+1.5+5.0	0.98	0.98	3.25	1.90	5.20	7.10	0.33	1.05	2.17	1.51	4.76	9.80	1.28	1.28	4.25	1.60	6.80	8.30
1.5+2.0+2.0	1.42	1.89	1.89	1.80	5.20	6.45	0.37	1.10	2.13	1.65	4.99	9.64	1.85	2.47	1.30	6.80	8.00	
1.5+2.0+2.5	1.30	1.73	2.17	1.80	5.20	6.70	0.37	1.09	2.19	1.65	4.94	9.90	1.70	2.27	2.83	1.30	6.80	8.00
1.5+2.0+3.5	1.11	1.49	2.60	1.90	5.20	6.80	0.37	1.08	2.23	1.65	4.90	10.10	1.46	1.94	3.40	1.40	6.80	8.10
1.5+2.0+4.2	1.01	1.35	2.84	1.90	5.20	6.80	0.37	1.08	2.19	1.65	4.90	9.90	1.32	1.77	3.71	1.40	6.80	8.10
1.5+2.0+5.0	0.92	1.22	3.06	1.90	5.20	7.20	0.33	1.04	2.15	1.51	4.72	9.70	1.20	1.60	4.00	1.60	6.80	8.30
1.5+2.5+2.5	1.20	2.00	2.00	1.80	5.20	6.70	0.37	1.09	2.17	1.65	4.94	9.80	1.57	2.62	2.62	1.30	6.80	8.00
1.5+2.5+3.5	1.04	1.73	2.43	1.90	5.20	6.80	0.37	1.08	2.21	1.65	4.90	10.00	1.36	2.27	3.17	1.40	6.80	8.10
1.5+2.5+4.2	0.95	1.59	2.66	1.90	5.20	6.80	0.37	1.07	2.19	1.65	4.85	9.90	1.24	2.07	3.48	1.40	6.80	8.10
1.5+2.5+5.0	0.87	1.44	2.89	1.90	5.20	7.30	0.33	1.04	2.17	1.51	4.72	9.80	1.13	1.89	3.78	1.60	6.80	8.30
1.5+3.5+3.5	0.92	2.14	2.14	1.80	5.20	7.30	0.37	1.07	2.15	1.65	4.85	9.70	1.20	2.80	2.80	1.30	6.80	8.20
2.0+2.0+2.0	1.73	1.73	1.73	1.80	5.20	6.50	0.37	1.07	2.06	1.65	4.85	9.34	2.27	2.27	2.27	1.30	6.80	8.00
2.0+2.0+2.5	1.60	1.60	2.00	1.80	5.20	7.00	0.37	1.06	2.21	1.65	4.81	10.00	2.09	2.09	2.62	1.30	6.80	8.00
2.0+2.0+3.5	1.39	1.39	2.43	1.90	5.20	7.20	0.39	1.05	2.17	1.75	4.76	9.80	1.81	3.17	1.40	6.80	8.10	
2.0+2.0+4.2	1.27	1.27	2.66	1.90	5.20	7.20	0.39	1.04	2.15	1.75	4.72	9.70	1.66	3.48	1.40	6.80	8.10	
2.0+2.0+5.0	1.16	1.16	2.89	1.90	5.20	7.30	0.35	1.03	2.19	1.59	4.67	9.91	1.51	3.78	1.60	6.80	8.30	
2.0+2.5+2.5	1.49	1.86	1.86	1.80	5.20	7.10	0.39	1.05	2.12	1.75	4.76	9.60	1.94	2.43	1.30	6.80	8.00	
2.0+2.5+3.5	1.30	1.63	2.28	1.90	5.20	7.20	0.39	1.04	2.15	1.75	4.72	9.70	1.70	2.13	2.98	1.50	6.80	8.10
2.0+2.5+4.2	1.20	1.49	2.51	1.90	5.20	7.20	0.39	1.04	2.14	1.75	4.72	9.65	1.56	1.95	3.28	1.50	6.80	8.10
2.0+3.5+3.5	1.16	2.02	2.02	1.90	5.20	7.30	0.39	1.04	2.15	1.75	4.72	9.70	1.51	2.64	2.64	1.50	6.80	8.20
2.5+2.5+2.5	1.73	1.73	1.73	1.90	5.20	7.10	0.39	1.04	2.19	1.75	4.72	9.90	2.27	2.27	2.27	1.40	6.80	8.00
2.5+2.5+3.5	1.53	1.53	2.14	1.90	5.20	7.20	0.39	1.04	2.16	1.75	4.72	9.75	2.00	2.00	2.80	1.50	6.80	8.10

Combination tables

Indoor unit	Cooling capacity [kW]			Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]			Total heating capacity [kW]		
	Room A	Room B	Room C	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Min.	Nom.	Max.
2.0+3.5+5.0	1.30	2.27	3.24	2.28	6.80	8.58	0.40	1.69	2.82	1.85	7.74	12.91	1.30	2.27	3.24	2.28	6.80	8.58
2.0+4.2+4.2	1.31	2.75	2.75	1.96	6.80	8.37	0.37	1.73	2.77	1.68	7.92	12.67	1.31	2.75	2.75	1.96	6.80	8.37
2.5+2.5+2.5	2.27	2.27	2.27	1.96	6.80	7.53	0.38	1.76	2.18	1.73	8.06	9.98	2.27	2.27	2.27	1.96	6.80	7.53
2.5+2.5+3.5	2.00	2.00	2.80	1.96	6.80	7.94	0.36	1.72	2.45	1.64	7.88	11.20	2.00	2.00	2.80	1.96	6.80	7.94
2.5+2.5+4.2	1.85	1.85	3.10	1.96	6.80	8.12	0.36	1.71	2.58	1.64	7.83	11.81	1.85	1.85	3.10	1.96	6.80	8.12
2.5+2.5+5.0	1.70	1.70	3.40	2.28	6.80	8.45	0.40	1.67	2.72	1.85	7.65	12.46	1.70	1.70	3.40	2.28	6.80	8.45
2.5+2.5+6.0	1.55	1.55	3.71	2.42	6.80	8.74	0.40	1.65	2.67	1.85	7.56	12.22	1.55	1.55	3.71	2.42	6.80	8.74
2.5+3.5+3.5	1.79	2.51	2.51	2.27	6.80	8.30	0.40	1.70	2.72	1.85	7.79	12.46	1.79	2.51	2.51	2.27	6.80	8.30
2.5+3.5+4.2	1.67	2.33	2.80	2.27	6.80	8.43	0.40	1.69	2.82	1.85	7.74	12.91	1.67	2.33	2.80	2.27	6.80	8.43
2.5+3.5+5.0	1.55	2.16	3.09	2.48	6.80	8.74	0.42	1.65	2.96	1.94	7.56	13.56	1.55	2.16	3.09	2.48	6.80	8.74
2.5+4.2+4.2	1.56	2.62	2.62	2.27	6.80	8.49	0.40	1.68	2.87	1.85	7.69	13.12	1.56	2.62	2.62	2.27	6.80	8.49
3.5+3.5+3.5	2.27	2.27	2.27	2.38	6.80	8.59	0.40	1.68	2.96	1.81	7.69	13.56	2.27	2.27	2.27	2.38	6.80	8.59

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)						Seasonal data heating (warm climate)					
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.40	1.69	2.82	1.85	7.74	12.91	95	A++	7.58	6.80	314	A+	4.28	5.30	1732	4.30	1.00	A+++	5.73	4.40	1074	4.40	0
0.37	1.73	2.77	1.68	7.92	12.67	95	A++	7.63	6.80	312	A+	4.32	5.30	1716	4.32	0.98	A+++	5.69	4.40	1082	4.40	0
0.38	1.76	2.18	1.73	8.06	9.98	95	A++	7.70	6.80	310	A+	4.12	5.30	1800	4.22	1.08	A+++	5.69	4.40	1083	4.40	0
0.36	1.72	2.45	1.64	7.88	11.20	95	A++	7.62	6.80	313	A+	4.16	5.30	1782	4.24	1.06	A+++	5.70	4.40	1081	4.40	0
0.36	1.71	2.58	1.64	7.83	11.81	95	A++	7.60	6.80	313	A+	4.18	5.30	1775	4.25	1.05	A+++	5.70	4.40	1080	4.40	0
0.40	1.67	2.72	1.85	7.65	12.46	95	A++	7.53	6.80	316	A+	4.26	5.30	1742	4.29	1.01	A+++	5.73	4.40	1075	4.40	0
0.40	1.65	2.67	1.85	7.56	12.22	95	A++	7.51	6.80	317	A+	4.30	5.30	1726	4.31	0.99	A+++	5.73	4.40	1074	4.40	0
0.40	1.70	2.72	1.85	7.79	12.46	95	A++	7.59	6.80	314	A+	4.20	5.30	1765	4.26	1.04	A+++	5.71	4.40	1077	4.40	0
0.40	1.69	2.82	1.85	7.74	12.91	95	A++	7.58	6.80	314	A+	4.22	5.30	1758	4.27	1.03	A+++	5.72	4.40	1077	4.40	0
0.42	1.65	2.96	1.94	7.56	13.56	95	A++	7.50	6.80	317	A+	4.30	5.30	1726	4.31	0.99	A+++	5.74	4.40	1073	4.40	0
0.40	1.68	2.87	1.85	7.69	13.12	95	A++	7.56	6.80	315	A+	4.23	5.30	1752	4.28	1.02	A+++	5.72	4.40	1077	4.40	0
0.40	1.68	2.96	1.81	7.69	13.56	95	A++	7.57	6.80	315	A+	4.24	5.30	1748	4.28	1.02	A+++	5.72	4.40	1076	4.40	0

Combination tables

Indoor unit	Cooling capacity [kW]				Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]				Total heating capacity [kW]		
	Room A	Room B	Room C	Room D	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Min.	Nom.	Max.
1.5	1.60	---	---	---	1.57	1.60	2.49	0.40	0.42	0.59	1.82	1.98	2.71	2.70	---	---	---	1.47	2.70	4.08
2.0	2.00	---	---	---	1.65	2.00	3.00	0.42	0.43	0.67	1.91	2.08	3.08	2.72	---	---	---	1.48	2.72	4.09
2.5	2.50	---	---	---	1.74	2.50	3.44	0.44	0.44	0.82	2.00	2.62	3.77	3.40	---	---	---	1.44	3.40	4.30
3.5	3.50	---	---	---	1.93	3.50	4.86	0.46	0.46	1.43	2.09	3.84	6.53	4.30	---	---	---	1.45	4.30	4.90
4.2	4.20	---	---	---	1.93	4.20	5.33	0.46	0.46	1.43	2.09	3.93	6.56	---	---	4.32	---	1.44	4.32	5.70
5.0	5.00	---	---	---	1.94	5.00	6.03	0.44	0.44	2.13	2.00	7.20	9.77	---	---	5.60	---	1.66	5.60	6.90
6.0	6.00	---	---	---	1.94	6.00	6.51	0.44	0.44	2.13	2.00	7.29	9.77	---	---	7.90	---	1.88	7.90	8.91
1.5+1.5	1.50	1.50	---	---	1.95	3.00	4.79	0.40	0.51	1.15	1.81	2.34	5.25	2.65	2.65	---	---	1.65	5.30	7.38
1.5+2.0	1.50	2.00	---	---	1.95	3.50	4.96	0.40	0.62	1.22	1.81	2.84	5.58	2.44	3.26	---	---	1.65	5.70	7.76
1.5+2.5	1.50	2.50	---	---	1.95	4.00	5.28	0.40	0.75	1.36	1.81	3.44	6.23	2.29	3.81	---	---	1.65	6.10	7.95
1.5+3.5	1.50	3.50	---	---	1.95	5.00	6.17	0.39	1.04	1.83	1.77	4.76	8.39	2.07	4.83	---	---	1.80	6.90	8.50
1.5+4.2	1.50	4.20	---	---	1.95	5.70	6.39	0.39	1.27	1.96	1.77	5.82	8.97	1.97	---	5.53	---	1.80	7.50	8.85
1.5+5.0	1.50	5.00	---	---	1.95	6.50	7.08	0.38	1.50	2.23	1.73	6.87	10.22	1.89	---	6.31	---	2.18	8.20	10.38
1.5+6.0	1.36	5.44	---	---	1.96	6.80	7.59	0.37	1.62	2.36	1.68	7.42	10.79	1.72	---	6.88	---	2.46	8.60	10.58
2.0+2.0	2.00	2.00	---	---	1.95	4.00	5.12	0.40	0.75	1.29	1.81	3.44	5.91	3.25	3.25	---	---	1.65	6.50	7.95
2.0+2.5	2.00	2.50	---	---	1.95	4.50	5.44	0.40	0.89	1.43	1.81	4.08	6.56	3.07	3.83	---	---	1.65	6.90	8.12
2.0+3.5	2.00	3.50	---	---	1.95	5.50	6.30	0.39	1.17	1.91	1.77	5.36	8.76	2.73	4.77	---	---	1.80	7.50	8.67
2.0+4.2	2.00	4.20	---	---	1.95	6.20	6.51	0.39	1.43	2.05	1.77	6.55	9.37	2.58	---	5.42	---	1.80	8.00	9.03
2.0+5.0	1.94	4.86	---	---	1.95	6.80	7.26	0.38	1.59	2.36	1.73	7.28	10.79	2.46	---	6.14	---	2.18	8.60	10.56
2.0+6.0	1.70	5.10	---	---	1.96	6.80	7.71	0.37	1.61	2.45	1.68	7.37	11.20	2.15	---	6.45	---	2.46	8.60	10.75
2.5+2.5	2.50	2.50	---	---	1.95	5.00	6.10	0.41	1.01	1.78	1.89	4.63	8.15	3.60	3.60	---	---	1.65	7.20	8.49
2.5+3.5	2.50	3.50	---	---	1.95	6.00	6.57	0.40	1.29	2.11	1.81	5.91	9.65	3.29	4.61	---	---	1.89	7.90	9.03
2.5+4.2	2.50	4.20	---	---	1.95	6.70	6.95	0.40	1.51	2.38	1.81	6.92	10.88	3.10	---	5.20	---	1.89	8.30	9.29
2.5+5.0	2.27	4.53	---	---	1.95	6.80	7.37	0.37	1.50	2.45	1.68	6.87	11.20	2.87	---	5.73	---	2.27	8.60	10.68
2.5+6.0	2.00	4.80	---	---	1.96	6.80	7.71	0.35	1.48	2.45	1.60	6.78	11.20	2.53	---	6.07	---	2.55	8.60	10.88
3.5+3.5	3.40	3.40	---	---	1.95	6.80	7.13	0.38	1.45	2.37	1.73	6.64	10.83	4.30	4.30	---	---	2.17	8.60	9.38
3.5+4.2	3.09	3.71	---	---	1.95	6.80	7.24	0.38	1.45	2.46	1.73	6.64	11.24	3.91	---	4.69	---	2.17	8.60	9.47
3.5+5.0	2.80	4.00	---	---	1.95	6.80	7.76	0.35	1.42	2.78	1.60	6.50	12.71	3.54	---	5.06	---	2.56	8.60	10.90
3.5+6.0	2.51	4.29	---	---	2.26	6.80	8.07	0.40	1.40	2.72	1.81	6.41	12.46	3.17	---	5.43	---	2.74	8.60	11.01
4.2+4.2	3.40	3.40	---	---	1.95	6.80	7.14	0.38	1.44	2.37	1.73	6.60	10.83	---	---	4.30	4.30	2.17	8.60	9.56
4.2+5.0	3.10	3.70	---	---	1.95	6.80	7.77	0.35	1.41	2.78	1.60	6.46	12.71	---	---	3.93	4.67	2.56	8.60	10.91
4.2+6.0	2.80	4.00	---	---	2.26	6.80	8.08	0.40	1.40	2.72	1.81	6.41	12.46	---	---	3.54	5.06	2.74	8.60	11.02
5.0+5.0	3.40	3.40	---	---	2.34	6.80	8.22	0.43	1.38	2.98	1.98	6.32	13.65	---	---	4.30	4.30	2.94	8.60	11.10
5.0+6.0	3.09	3.71	---	---	2.47	6.80	8.45	0.44	1.37	2.92	2.02	6.28	13.36	---	---	3.91	4.69	3.14	8.60	11.10
1.5+1.5+1.5	1.50	1.50	1.50	---	1.96	4.50	6.40	0.39	0.61	1.57	1.77	2.80	7.17	2.17	2.17	---	2.01	6.50	9.92	
1.5+1.5+2.0	1.44	1.44	1.92	---	1.96	4.80	6.56	0.39	0.70	1.65	1.77	3.21	7.54	2.07	2.07	2.76	---	2.01	6.90	10.10
1.5+1.5+2.5	1.42	1.42	2.36	---	1.96	5.20	6.72	0.39	0.83	1.73	1.77	3.81	7.90	2.02	2.02	3.36	---	2.10	7.40	10.18
1.5+1.5+3.5	1.50	1.50	3.50	---	1.96	6.50	7.11	0.38	1.56	1.92	1.73	7.14	8.80	1.89	1.89	4.42	---	2.31	8.20	10.29
1.5+1.5+4.2	1.42	1.42	3.97	---	1.96	6.80	7.33	0.38	1.80	2.05	1.73	8.24	9.37	1.79	1.79	5.02	---	2.31	8.60	10.29
1.5+1.5+5.0	1.28	1.28	4.25	---	1.96	6.80	7.74	0.36	1.75	2.22	1.64	8.01	10.14	1.61	1.61	5.38	---	2.71	8.60	10.46
1.5+1.5+6.0	1.13	1.13	4.53	---	2.31	6.80	7.99	0.40	1.73	2.17	1.85	7.92	9.94	1.43	1.43	5.73	---	2.93	8.60	10.59
1.5+2.0+2.0	1.50	2.00	2.00	---	1.96	5.50	6.48	0.39	1.01	1.61	1.77	4.63	7.38	2.35	3.13	3.13	---	2.01	8.60	10.26
1.5+2.0+2.5	1.50	2.00	2.50	---	1.96	6.00	6.87	0.39	1.32	1.81	1.77	6.05	8.26	2.15	2.87	3.58	---	2.10	8.60	10.36
1.5+2.0+3.5	1.46	1.94	3.40	---	1.96	6.80	7.25	0.38	1.80	2.01	1.73	8.24	9.21	1.84	2.46	4.30	---	2.31	8.60	10.45
1.5+2.0+4.2	1.32	1.77	3.71	---	1.96	6.80	7.47	0.38	1.79	2.14	1.73	8.20	9.78	1.68	2.23	4.69	---	2.31	8.60	10.46
1.5+2.0+5.0	1.20	1.60	4.00	---	1.96	6.80	7.87	0.36	1.74	2.31	1.64	7.97	10.55	1.52	2.02	5.06	---	2.71	8.60	10.88
1.5+2.0+6.0	1.07	1.43	4.29	---	2.31	6.80	8.13	0.40	1.72	2.26	1.85	7.88	10.35	1.36	1.81	5.43	---	2.93	8.60	10.89
1.5+2.5+2.5	1.50	2.50	2.50	---	1.96	6.50	7.10	0.38	1.63	1.92	1.73	7.46	8.80	1.98	3.31	3.31	---	2.20	8.60	10.47
1.5+2.5+3.5	1.36	2.27	3.17	---	1.96	6.80	7.60	0.36	1.79	2.23	1.64	8.20	10.18	1.72	2.87	4.01	---	2.40	8.60	10.58
1.5+2.5+4.2	1.24	2.07	3.48	---	1.96	6.80	7.81	0.36	1.78	2.35	1.64	8.15	10.75	1.57	2.62	4.40	---	2.41	8.60	10.58
1.5+2.5+5.0	1.13	1.89	3.78	---	1.96	6.80	7.95	0.36	1.74	2.35	1.64	7.97	10.75	1.43	2.39	4.78	---	2.81	8.60	11.00
1.5+2.5+6.0	1.02	1.70	4.08	---	2.31	6.80	8.42	0.41	1.71	2.44	1.89	7.83	11.16	1.29	2.15	5.16	---	3.02	8.60	11.00
1.5+3.5+3.5	1.20	2.80	2.80	---	1.96	6.80	7.94	0.37	1.77	2.45	1.68	8.11	11.20	1.52	3.54	3.54	---	2.69	8.60	10.59
1.5+3.5+4.2	1.11	2.59	3.10	---	1.96	6.80	8.13	0.37	1.76	2.58	1.68	8.06	11.81	1.40	3.27	3.93	---	2.69	8.60	10.59
1.5+3.5+5.0	1.02	2.38	3.40	---	1.96	6.80	8.46	0.33	1.72	2.72	1.52	7.88	12.46	1.29	3.01	4.30	---	3.00	8.60	10.93
1.5+3.5+6.0	0.93	2.16	3.71	---	2.31	6.80	8.56	0.41	1.70	2.53	1.89	7.79	11.57</td							

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)				Seasonal data heating (warm climate)							
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.42	0.73	1.22	1.91	3.35	5.58	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.43	0.74	1.28	1.95	3.39	5.86	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.42	1.03	1.37	1.91	4.72	6.27	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.40	1.42	1.75	1.82	6.50	8.01	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.40	1.41	2.04	1.82	6.46	9.34	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.39	1.84	2.59	1.78	8.43	11.85	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.37	2.65	2.64	1.69	12.13	12.08	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
0.36	1.19	1.83	1.63	5.45	8.38	95	A++	7.29	3.00	144	A	3.85	3.80	1380	3.07	0.73	A+++	6.08	4.40	1012	4.40	0
0.36	1.31	1.99	1.63	6.00	9.09	95	A++	7.53	3.50	163	A	3.85	3.80	1380	3.08	0.72	A+++	6.10	4.40	1010	4.40	0
0.36	1.43	2.06	1.63	6.55	9.43	95	A++	7.75	4.00	181	A	3.87	3.80	1373	3.09	0.71	A+++	6.11	4.40	1008	4.40	0
0.37	1.69	2.35	1.68	7.74	10.74	95	A++	7.80	5.00	225	A	3.86	4.30	1558	3.39	0.91	A+++	6.13	4.40	1005	4.40	0
0.37	1.90	2.57	1.68	8.70	11.75	95	A++	7.84	5.70	255	A	3.88	4.30	1548	3.40	0.90	A+++	6.14	4.40	1003	4.40	0
0.45	2.13	2.91	2.06	9.75	13.31	95	A++	7.86	6.50	290	A	3.87	4.50	1628	3.55	0.95	A+++	6.17	4.40	998	4.40	0
0.48	2.28	2.67	2.19	10.44	12.21	95	A++	7.81	6.80	305	A	3.91	4.80	1717	3.73	1.07	A+++	6.21	4.40	992	4.40	0
0.36	1.37	2.31	1.63	6.28	10.57	95	A++	7.75	4.00	181	A	3.91	3.80	1361	3.09	0.71	A+++	6.10	4.40	1009	4.40	0
0.36	1.52	2.32	1.63	6.96	10.62	95	A++	7.80	4.50	202	A	3.92	3.80	1354	3.10	0.70	A+++	6.12	4.40	1007	4.40	0
0.37	1.75	2.43	1.68	8.01	11.12	95	A++	7.91	5.50	244	A	3.86	4.30	1558	3.39	0.91	A+++	6.13	4.40	1004	4.40	0
0.37	1.98	2.66	1.68	9.07	12.17	95	A++	7.88	6.20	276	A	3.88	4.30	1550	3.40	0.90	A+++	6.15	4.40	1002	4.40	0
0.45	2.26	3.00	2.06	10.35	13.73	95	A++	7.78	6.80	306	A	3.90	4.50	1612	3.55	0.95	A+++	6.19	4.40	996	4.40	0
0.48	2.24	2.74	2.19	10.26	12.55	95	A++	7.71	6.80	309	A	3.93	4.80	1710	3.73	1.07	A+++	6.22	4.40	990	4.40	0
0.36	1.62	2.36	1.63	7.42	10.78	95	A++	7.81	5.00	224	A	3.85	4.00	1455	3.22	0.78	A+++	6.14	4.40	1004	4.40	0
0.38	1.91	2.66	1.72	8.75	12.17	95	A++	7.94	6.00	265	A	3.83	4.30	1569	3.40	0.90	A+++	6.13	4.40	1004	4.40	0
0.38	2.11	2.82	1.72	9.66	12.93	95	A++	7.99	6.70	294	A	3.86	4.30	1559	3.41	0.89	A+++	6.14	4.40	1003	4.40	0
0.46	2.24	3.09	2.11	10.26	14.15	95	A++	7.93	6.80	300	A	3.84	4.50	1637	3.59	0.91	A+++	6.14	4.40	1003	4.40	0
0.50	2.22	2.77	2.28	10.17	12.67	95	A++	7.90	6.80	301	A	3.91	4.80	1716	3.80	1.00	A+++	6.14	4.40	1002	4.40	0
0.42	2.26	2.86	1.94	10.35	13.09	95	A++	8.02	6.80	297	A+	4.00	4.80	1680	3.73	1.07	A+++	6.14	4.40	1003	4.40	0
0.42	2.26	2.91	1.94	10.35	13.31	95	A++	8.00	6.80	298	A+	4.01	4.80	1675	3.75	1.05	A+++	6.14	4.40	1002	4.40	0
0.51	2.22	3.13	2.32	10.17	14.32	95	A++	7.92	6.80	301	A+	4.01	4.80	1675	3.78	1.02	A+++	6.14	4.40	1003	4.40	0
0.52	2.21	2.76	2.37	10.12	12.63	95	A++	7.89	6.80	302	A+	4.06	4.80	1652	3.79	1.01	A+++	6.14	4.40	1002	4.40	0
0.42	2.22	2.94	1.94	10.17	13.47	95	A++	7.98	6.80	298	A+	4.00	4.80	1679	3.76	1.04	A+++	6.16	4.40	1000	4.40	0
0.51	2.21	3.19	2.32	10.12	14.61	95	A++	7.90	6.80	302	A	3.93	5.20	1851	4.01	1.19	A+++	6.15	4.40	1001	4.40	0
0.51	2.20	2.79	2.32	10.07	12.76	95	A++	7.87	6.80	303	A+	4.03	5.20	1804	4.02	1.18	A+++	6.15	4.40	1002	4.40	0
0.59	2.17	3.11	2.71	9.94	14.23	95	A++	7.88	6.80	302	A+	4.06	5.20	1793	4.05	1.15	A+++	6.14	4.40	1002	4.40	0
0.60	2.15	2.72	2.75	9.84	12.46	95	A++	7.85	6.80	304	A+	4.09	5.20	1779	4.08	1.12	A+++	6.14	4.40	1003	4.40	0
0.41	1.33	2.26	1.89	6.09	10.36	95	A+++	8.54	4.50	185	A+	4.07	5.30	1822	4.19	1.11	A+++	5.65	4.40	1090	4.40	0
0.41	1.46	2.34	1.89	6.69	10.69	95	A+++	8.52	4.80	198	A+	4.08	5.30	1817	4.20	1.10	A+++	5.65	4.40	1089	4.40	0
0.42	1.64	2.37	1.94	7.51	10.86	95	A+++	8.50	5.00	206	A+	4.09	5.30	1810	4.21	1.09	A+++	5.66	4.40	1089	4.40	0
0.44	1.87	2.49	2.02	8.56	11.41	95	A++	7.85	6.50	290	A+	4.14	5.30	1793	4.23	1.07	A+++	5.66	4.40	1087	4.40	0
0.44	2.03	2.49	2.02	9.30	11.41	95	A++	7.71	6.80	309	A+	4.15	5.30	1786	4.24	1.06	A+++	5.67	4.40	1086	4.40	0
0.55	2.01	2.57	2.50	9.20	11.75	95	A++	7.64	6.80	312	A+	4.23	5.30	1752	4.28	1.02	A+++	5.69	4.40	1081	4.40	0
0.55	1.99	2.31	2.50	9.11	10.57	95	A++	7.62	6.80	313	A+	4.27	5.30	1735	4.30	1.00	A+++	5.71	4.40	1079	4.40	0
0.41	2.05	2.41	1.89	9.39	11.03	95	A++	8.17	5.50	236	A+	4.09	5.30	1814	4.21	1.09	A+++	5.66	4.40	1088	4.40	0
0.42	2.04	2.44	1.94	9.34	11.16	95	A++	7.90	6.00	266	A+	4.10	5.30	1807	4.22	1.08	A+++	5.66	4.40	1087	4.40	0
0.44	2.02	2.58	2.02	9.25	11.79	95	A++	7.71	6.80	309	A+	4.14	5.30	1793	4.23	1.07	A+++	5.67	4.40	1085	4.40	0
0.44	2.01	2.57	2.02	9.20	11.75	95	A++	7.69	6.80	310	A+	4.15	5.30	1786	4.24	1.06	A+++	5.68	4.40	1084	4.40	0
0.55	2.00	2.64	2.50	9.16	12.08	95	A++	7.63	6.80	312	A+	4.23	5.30	1752	4.28	1.02	A+++	5.70	4.40	1080	4.40	0
0.55	1.98	2.38	2.50	9.07	10.91	95	A++	7.60	6.80	313	A+	4.27	5.30	1735	4.30	1.00	A+++	5.71	4.40	1077	4.40	0
0.55	1.99	2.57	2.50	9.11	11.75	95	A++	7.67	6.80	311	A+	4.20	5.30	1765	4.26	1.04	A+++	5.69	4.40	1082	4.40	0
0.55	1.98	2.56	2.50	9.07	11.71	95	A++	7.65	6.80	311	A+	4.22	5.30	1755	4.27	1.03	A+++	5.69	4.40	1082	4.40	0
0.62	1.97	2.59	2.84	9.02	11.87	95	A++	7.58	6.80	314	A+	4.30	5.30	1722	4.31	0.99	A+++	5.72	4.40	1077	4.40	0
0.55	1.96	2.37	2.50	8.98	10.86	95	A++	7.56	6.80	315	A+	4.34	5.30	1707	4.33	0.97	A+++	5.73	4.40	1075	4.40	0
0.55	1.98	2.59	2.50	9.07	11.87	95	A++	7.63	6.80	312	A+	4.24	5.30	1748	4.28	1.02	A+++	5.71	4.40	1079	4.40	0
0.62	1.96	2.67	2.84	8.98	12.21	95	A++	7.56	6.80	315	A+	4.32	5.30	1716	4.32	0.98	A+++	5.73	4.40	1075	4.40	0
0.41	1.72	2.48	1.89	7.88	11.37	95	A++	7.84	6.00	268	A+	4.07	5.30	1821	4.20	1.10	A+++	5.67	4.40	1086	4.40	0
0.42	1.83	2.52	1.94	8.38	11.54	95	A++	7.76	6.50	294	A+											

Combination tables

Indoor unit	Cooling capacity [kW]				Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]				Total heating capacity [kW]		
	Room A	Room B	Room C	Room D	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Min.	Nom.	Max.
2.0+3.5+5.0	1.30	2.27	3.24	---	2.28	6.80	8.58	0.40	1.69	2.82	1.85	7.74	12.91	1.64	2.87	4.10	---	3.00	8.60	11.11
2.0+4.2+4.2	1.31	2.75	2.75	---	1.96	6.80	8.37	0.37	1.73	2.77	1.68	7.92	12.67	1.65	---	3.47	3.47	2.69	8.60	10.77
2.5+2.5+2.5	2.27	2.27	2.27	---	1.96	6.80	7.53	0.38	1.76	2.18	1.73	8.06	9.98	2.87	2.87	2.87	---	2.31	8.60	10.65
2.5+2.5+3.5	2.00	2.00	2.80	---	1.96	6.80	7.94	0.36	1.72	2.45	1.64	7.88	11.20	2.53	2.53	3.54	---	2.50	8.60	10.87
2.5+2.5+4.2	1.85	1.85	3.10	---	1.96	6.80	8.12	0.36	1.71	2.58	1.64	7.83	11.81	2.34	2.34	3.93	---	2.50	8.60	10.88
2.5+2.5+5.0	1.70	1.70	3.40	---	2.28	6.80	8.45	0.40	1.67	2.72	1.85	7.65	12.46	2.15	2.15	4.30	---	2.91	8.60	11.07
2.5+2.5+6.0	1.55	1.55	3.71	---	2.42	6.80	8.74	0.40	1.65	2.67	1.85	7.56	12.22	1.95	1.95	4.69	---	3.12	8.60	11.08
2.5+3.5+3.5	1.79	2.51	2.51	---	2.27	6.80	8.30	0.40	1.70	2.72	1.85	7.79	12.46	2.26	3.17	3.17	---	2.78	8.60	11.00
2.5+3.5+4.2	1.67	2.33	2.80	---	2.27	6.80	8.43	0.40	1.69	2.82	1.85	7.74	12.91	2.11	2.95	3.54	---	2.79	8.60	11.01
2.5+3.5+5.0	1.55	2.16	3.09	---	2.48	6.80	8.74	0.42	1.65	2.96	1.94	7.56	13.56	1.95	2.74	3.91	---	3.19	8.60	11.08
2.5+4.2+4.2	1.56	2.62	2.62	---	2.27	6.80	8.49	0.40	1.68	2.87	1.85	7.69	13.12	1.97	---	3.31	3.31	2.79	8.60	11.01
3.5+3.5+3.5	2.27	2.27	2.27	---	2.38	6.80	8.59	0.40	1.68	2.96	1.81	7.69	13.56	2.87	2.87	2.87	---	2.98	8.60	11.06
1.5+1.5+1.5+1.5	1.65	1.65	1.65	1.97	6.60	7.02	0.38	1.38	1.61	1.73	6.32	7.38	1.95	1.95	1.95	1.95	2.47	7.80	10.07	
1.5+1.5+1.5+2.0	1.52	1.52	1.52	2.03	1.97	6.60	7.22	0.38	1.37	1.69	1.73	6.28	7.72	1.89	1.89	1.89	1.89	2.47	8.20	10.25
1.5+1.5+1.5+2.5	1.41	1.41	1.41	2.36	1.97	6.60	7.45	0.36	1.35	1.78	1.64	6.18	8.15	1.84	1.84	1.84	1.84	2.57	8.60	10.36
1.5+1.5+1.5+3.5	1.28	1.28	1.28	2.98	1.97	6.80	7.87	0.37	1.58	1.99	1.68	7.24	9.12	1.61	1.61	1.61	1.61	3.76	8.60	10.46
1.5+1.5+1.5+4.2	1.17	1.17	1.17	3.28	1.97	6.80	8.04	0.37	1.58	2.07	1.68	7.24	9.49	1.48	1.48	1.48	1.48	2.78	8.60	10.46
1.5+1.5+1.5+5.0	1.07	1.07	1.07	3.58	2.45	6.80	8.28	0.42	1.54	2.27	1.94	7.05	10.39	1.36	1.36	4.53	4.53	3.10	8.60	10.52
1.5+1.5+1.5+6.0	0.97	0.97	0.97	3.89	2.48	6.80	8.38	0.40	1.52	2.08	1.81	6.96	9.53	1.23	1.23	4.91	4.91	3.04	8.60	10.88
1.5+1.5+2.0+2.0	1.46	1.46	1.94	1.97	6.80	7.45	0.38	1.60	1.78	1.73	7.33	8.15	1.84	1.84	2.46	2.46	2.47	8.60	10.44	
1.5+1.5+2.0+2.5	1.36	1.36	1.81	2.27	1.97	6.80	7.62	0.36	1.58	1.87	1.64	7.24	8.55	1.72	1.72	2.29	2.87	2.57	8.60	10.54
1.5+1.5+2.0+3.5	1.20	1.20	1.60	2.80	1.97	6.80	8.03	0.37	1.57	2.07	1.68	7.19	9.49	1.52	1.52	2.02	3.54	2.77	8.60	10.64
1.5+1.5+2.0+4.2	1.11	1.11	1.48	3.10	1.97	6.80	8.19	0.37	1.56	2.16	1.68	7.14	9.90	1.40	1.40	1.87	3.93	2.78	8.60	10.65
1.5+1.5+2.0+5.0	1.02	1.02	1.36	3.40	2.45	6.80	8.43	0.42	1.53	2.36	1.94	7.01	10.78	1.29	1.29	1.72	4.30	3.10	8.60	10.71
1.5+1.5+2.0+6.0	0.93	0.93	1.24	3.71	2.48	6.80	8.56	0.40	1.51	2.18	1.81	6.92	9.98	1.17	1.17	1.56	4.69	3.04	8.60	11.07
1.5+1.5+2.5+2.5	1.28	1.28	2.13	2.13	1.97	6.80	7.70	0.36	1.58	1.90	1.64	7.24	8.72	1.61	1.61	2.69	2.69	2.67	8.60	10.55
1.5+1.5+2.5+3.5	1.13	1.13	1.89	2.64	2.32	6.80	8.11	0.46	1.56	2.12	2.11	7.14	9.69	1.43	1.43	2.39	3.34	2.98	8.60	10.65
1.5+1.5+2.5+4.2	1.05	1.05	1.75	2.94	2.32	6.80	8.27	0.46	1.55	2.21	2.11	7.10	10.10	1.33	1.33	2.22	3.72	2.98	8.60	10.65
1.5+1.5+2.5+5.0	0.97	0.97	1.62	3.24	2.45	6.80	8.70	0.42	1.52	2.46	1.94	6.96	11.24	1.23	1.23	2.05	4.10	3.10	8.60	10.90
1.5+1.5+3.5+3.5	1.02	1.02	2.38	2.38	2.32	6.80	8.57	0.46	1.55	2.39	2.11	7.10	10.92	1.29	1.29	3.01	3.01	3.18	8.60	10.75
1.5+1.5+3.5+4.2	0.95	0.95	2.22	2.67	2.44	6.80	8.65	0.50	1.54	2.44	2.27	7.05	11.16	1.21	1.21	2.81	3.38	2.99	8.60	10.85
1.5+2.0+2.0+2.0	1.36	1.81	1.81	1.97	6.80	7.61	0.38	1.59	1.87	1.73	7.28	8.55	1.72	1.72	2.29	2.29	2.47	8.60	10.63	
1.5+2.0+2.0+2.5	1.28	1.70	1.70	2.13	1.97	6.80	7.78	0.36	1.58	1.95	1.64	7.24	8.92	1.61	1.61	2.15	2.15	2.57	8.60	10.72
1.5+2.0+2.0+3.5	1.13	1.51	1.51	2.64	2.32	6.80	8.18	0.46	1.57	2.16	2.11	7.19	9.90	1.43	1.91	1.91	3.34	2.77	8.60	10.83
1.5+2.0+2.0+4.2	1.05	1.40	1.40	2.94	2.32	6.80	8.34	0.46	1.56	2.25	2.11	7.14	10.31	1.33	1.77	3.72	2.78	8.60	10.84	
1.5+2.0+2.0+5.0	0.97	1.30	1.30	3.24	2.45	6.80	8.77	0.42	1.53	2.51	1.94	7.01	11.49	1.23	1.64	1.64	4.10	3.10	8.60	10.90
1.5+2.0+2.5+2.5	1.20	1.60	2.00	1.97	6.80	7.86	0.36	1.58	1.99	1.64	7.24	9.12	1.52	2.02	2.53	2.53	2.67	8.60	10.72	
1.5+2.0+2.5+3.5	1.07	1.43	1.79	2.51	2.32	6.80	8.26	0.46	1.56	2.21	2.11	7.14	10.10	1.36	1.81	2.26	3.17	2.98	8.60	10.83
1.5+2.0+2.5+4.2	1.00	1.33	1.67	2.80	2.32	6.80	8.43	0.46	1.55	2.30	2.11	7.10	10.51	1.26	1.69	2.11	3.54	2.98	8.60	10.84
1.5+2.0+2.5+5.0	0.93	1.24	1.55	3.09	2.45	6.80	8.85	0.42	1.52	2.55	1.94	6.96	11.69	1.17	1.56	1.95	3.91	3.10	8.60	11.09
1.5+2.0+3.5+3.5	0.97	1.30	2.27	2.27	1.98	6.80	8.64	0.37	1.55	2.44	1.68	7.10	11.16	1.23	1.64	2.87	2.87	3.18	8.60	10.93
1.5+2.5+2.5+2.5	1.13	1.89	1.89	1.97	6.80	8.18	0.33	1.57	2.16	1.52	7.19	9.90	1.43	2.39	2.39	2.39	2.77	8.60	10.73	
1.5+2.5+2.5+3.5	1.02	1.70	1.70	2.38	2.32	6.80	8.49	0.40	1.55	2.34	1.81	7.10	10.71	1.29	2.15	2.15	3.01	3.08	8.60	10.92
1.5+2.5+2.5+4.2	0.95	1.59	1.59	2.67	2.32	6.80	8.50	0.41	1.55	2.34	1.89	7.10	10.71	1.21	2.01	2.01	3.38	2.98	8.60	11.01
1.5+2.5+3.5+3.5	0.93	1.55	2.16	2.16	2.32	6.80	8.71	0.40	1.54	2.48	1.81	7.05	11.36	1.17	1.95	2.74	2.74	3.18	8.60	11.02
2.0+2.0+2.0+2.0	1.70	1.70	1.70	1.97	6.80	7.78	0.38	1.58	1.95	1.73	7.24	8.92	2.15	2.15	2.15	2.15	2.47	8.60	10.81	
2.0+2.0+2.0+2.5	1.60	1.60	2.00	1.97	6.80	7.95	0.36	1.58	2.04	1.64	7.24	9.33	2.02	2.02	2.53	2.53	2.57	8.60	10.90	
2.0+2.0+2.0+3.5	1.43	1.43	1.43	2.51	1.97	6.80	8.33	0.37	1.56	2.25	1.68	7.14	10.31	1.81	1.81	3.17	2.77	8.60	11.00	
2.0+2.0+2.0+4.2	1.33	1.33	1.33	2.80	1.97	6.80	8.49	0.37	1.55	2.34	1.68	7.10	10.71	1.69	1.69	3.54	2.78	8.60	11.01	
2.0+2.0+2.0+5.0	1.24	1.24	1.24	3.09	2.45	6.80	8.91	0.42	1.52	2.61	1.94	6.96	11.93	1.56	1.56	3.91	3.10	8.60	11.08	
2.0+2.0+2.5+2.5	1.51	1.51</td																		

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)					Seasonal data heating (warm climate)						
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.58	1.98	2.82	2.67	9.07	12.88	95	A++	7.58	6.80	314	A+	4.28	5.30	1732	4.30	1.00	A+++	5.73	4.40	1074	4.40	0
0.52	1.97	2.69	2.37	9.02	12.29	95	A++	7.63	6.80	312	A+	4.32	5.30	1716	4.32	0.98	A+++	5.69	4.40	1082	4.40	0
0.45	1.99	2.64	2.06	9.11	12.08	95	A++	7.70	6.80	310	A+	4.12	5.30	1800	4.22	1.08	A+++	5.69	4.40	1083	4.40	0
0.48	1.99	2.72	2.19	9.11	12.46	95	A++	7.62	6.80	313	A+	4.16	5.30	1782	4.24	1.06	A+++	5.70	4.40	1081	4.40	0
0.48	1.97	2.72	2.19	9.02	12.46	95	A++	7.60	6.80	313	A+	4.18	5.30	1775	4.25	1.05	A+++	5.70	4.40	1080	4.40	0
0.58	1.96	2.78	2.67	8.98	12.72	95	A++	7.53	6.80	316	A+	4.26	5.30	1742	4.29	1.01	A+++	5.73	4.40	1075	4.40	0
0.58	1.94	2.43	2.67	8.88	11.12	95	A++	7.51	6.80	317	A+	4.30	5.30	1726	4.31	0.99	A+++	5.73	4.40	1074	4.40	0
0.53	1.96	2.72	2.41	8.98	12.46	95	A++	7.59	6.80	314	A+	4.20	5.30	1765	4.26	1.04	A+++	5.71	4.40	1077	4.40	0
0.53	1.96	2.71	2.41	8.98	12.42	95	A++	7.58	6.80	314	A+	4.22	5.30	1758	4.27	1.03	A+++	5.72	4.40	1077	4.40	0
0.60	1.90	2.74	2.75	8.70	12.55	95	A++	7.50	6.80	317	A+	4.30	5.30	1726	4.31	0.99	A+++	5.74	4.40	1073	4.40	0
0.53	1.95	2.71	2.41	8.93	12.42	95	A++	7.56	6.80	315	A+	4.23	5.30	1752	4.28	1.02	A+++	5.72	4.40	1077	4.40	0
0.57	1.94	2.79	2.62	8.88	12.76	95	A++	7.57	6.80	315	A+	4.24	5.30	1748	4.28	1.02	A+++	5.72	4.40	1076	4.40	0
0.49	1.62	2.12	2.24	7.42	9.68	95	A+++	8.54	6.60	271	A+	4.18	5.80	1942	4.65	1.15	A+++	5.75	4.40	1071	4.40	0
0.49	1.77	2.19	2.24	8.11	10.02	95	A+++	8.52	6.60	271	A+	4.19	5.80	1937	4.66	1.14	A+++	5.77	4.40	1067	4.40	0
0.50	1.88	2.20	2.28	8.61	10.07	95	A+++	8.50	6.60	272	A+	4.19	5.80	1934	4.66	1.14	A+++	5.77	4.40	1066	4.40	0
0.54	1.84	2.21	2.45	8.43	10.11	95	A++	8.03	6.80	297	A+	4.24	5.80	1915	4.68	1.12	A+++	5.80	4.40	1061	4.40	0
0.53	1.84	2.20	2.41	8.43	10.06	95	A++	8.01	6.80	297	A+	4.27	5.80	1901	4.68	1.12	A+++	5.81	4.40	1060	4.40	0
0.59	1.83	2.13	2.71	8.38	9.73	95	A++	7.94	6.80	300	A+	4.28	5.80	1896	4.72	1.08	A+++	5.87	4.40	1050	4.40	0
0.45	1.79	1.98	2.06	8.20	9.05	95	A++	7.91	6.80	301	A+	4.38	5.80	1854	4.74	1.06	A+++	5.90	4.40	1044	4.40	0
0.49	1.87	2.26	2.24	8.56	10.36	95	A++	8.06	6.80	296	A+	4.20	5.80	1931	4.67	1.13	A+++	5.79	4.40	1064	4.40	0
0.50	1.87	2.27	2.28	8.56	10.39	95	A++	8.05	6.80	296	A+	4.21	5.80	1926	4.67	1.13	A+++	5.79	4.40	1063	4.40	0
0.54	1.84	2.26	2.45	8.43	10.34	95	A++	8.02	6.80	297	A+	4.28	5.80	1895	4.69	1.11	A+++	5.82	4.40	1058	4.40	0
0.53	1.82	2.25	2.41	8.33	10.30	95	A++	8.01	6.80	298	A+	4.32	5.80	1877	4.70	1.10	A+++	5.84	4.40	1055	4.40	0
0.59	1.82	2.20	2.71	8.33	10.06	95	A++	7.93	6.80	301	A+	4.34	5.80	1871	4.73	1.07	A+++	5.89	4.40	1045	4.40	0
0.45	1.78	2.04	2.06	8.15	9.35	95	A++	7.90	6.80	302	A+	4.44	5.80	1829	4.75	1.05	A+++	5.93	4.40	1039	4.40	0
0.52	1.86	2.23	2.37	8.52	10.19	95	A++	8.03	6.80	297	A+	4.22	5.80	1921	4.68	1.12	A+++	5.79	4.40	1064	4.40	0
0.59	1.82	2.27	2.71	8.33	10.40	95	A++	8.01	6.80	298	A+	4.32	5.80	1878	4.70	1.10	A+++	5.84	4.40	1054	4.40	0
0.58	1.81	2.27	2.67	8.29	10.40	95	A++	7.99	6.80	298	A+	4.34	5.80	1869	4.70	1.10	A+++	5.85	4.40	1053	4.40	0
0.59	1.80	2.25	2.71	8.24	10.30	95	A++	7.91	6.80	301	A+	4.38	5.80	1852	4.74	1.06	A+++	5.91	4.40	1041	4.40	0
0.64	1.78	2.30	2.93	8.15	10.53	95	A++	7.98	6.80	299	A+	4.45	5.80	1822	4.71	1.09	A+++	5.92	4.40	1040	4.40	0
0.58	1.78	2.34	2.67	8.15	10.69	95	A++	7.96	6.80	299	A++	4.60	5.80	1765	4.72	1.08	A+++	5.96	4.40	1033	4.40	0
0.49	1.87	2.34	2.24	8.56	10.69	95	A++	8.04	6.80	296	A+	4.21	5.80	1926	4.67	1.13	A+++	5.79	4.40	1064	4.40	0
0.50	1.86	2.35	2.28	8.52	10.76	95	A++	8.02	6.80	297	A+	4.22	5.80	1921	4.68	1.12	A+++	5.79	4.40	1064	4.40	0
0.54	1.81	2.36	2.45	8.29	10.80	95	A++	8.00	6.80	298	A+	4.32	5.80	1880	4.70	1.10	A+++	5.85	4.40	1053	4.40	0
0.53	1.80	2.35	2.41	8.24	10.74	95	A++	7.98	6.80	299	A+	4.33	5.80	1872	4.71	1.09	A+++	5.85	4.40	1052	4.40	0
0.59	1.79	2.26	2.71	8.20	10.36	95	A++	7.90	6.80	302	A+	4.36	5.80	1859	4.74	1.06	A+++	5.92	4.40	1041	4.40	0
0.52	1.86	2.29	2.37	8.52	10.48	95	A++	8.01	6.80	298	A+	4.23	5.80	1917	4.69	1.11	A+++	5.79	4.40	1063	4.40	0
0.59	1.80	2.35	2.71	8.24	10.74	95	A++	7.98	6.80	299	A+	4.34	5.80	1871	4.70	1.10	A+++	5.85	4.40	1052	4.40	0
0.58	1.80	2.35	2.67	8.24	10.74	95	A++	7.96	6.80	299	A+	4.35	5.80	1864	4.71	1.09	A+++	5.94	4.40	1037	4.40	0
0.59	1.79	2.33	2.71	8.20	10.66	95	A++	7.88	6.80	302	A+	4.38	5.80	1854	4.75	1.05	A+++	5.92	4.40	1041	4.40	0
0.64	1.78	2.37	2.93	8.15	10.86	95	A++	7.95	6.80	300	A++	4.62	5.80	1757	4.72	1.08	A+++	5.95	4.40	1034	4.40	0
0.55	1.85	2.29	2.50	8.47	10.48	95	A++	7.99	6.80	298	A+	4.24	5.80	1912	4.70	1.10	A+++	5.79	4.40	1063	4.40	0
0.62	1.79	2.38	2.84	8.20	10.91	95	A++	7.96	6.80	299	A+	4.37	5.80	1858	4.71	1.09	A+++	5.95	4.40	1036	4.40	0
0.58	1.78	2.41	2.67	8.15	11.03	95	A++	7.94	6.80	300	A+	4.39	5.80	1848	4.72	1.08	A+++	5.95	4.40	1035	4.40	0
0.64	1.76	2.41	2.93	8.06	11.03	95	A++	7.93	6.80	300	A++	4.63	5.80	1751	4.73	1.07	A+++	5.98	4.40	1031	4.40	0
0.49	1.86	2.40	2.24	8.52	10.99	95	A++	8.03	6.80	297	A+	4.22	5.80	1921	4.68	1.12	A+++	5.79	4.40	1064	4.40	0
0.50	1.86	2.41	2.28	8.52	11.03	95	A++	8.01	6.80	297	A+	4.23	5.80	1917	4.69	1.11	A+++	5.79	4.40	1063	4.40	0
0.54	1.79	2.42	2.45	8.20	11.07	95	A++	7.98	6.80	298	A+	4.38	5.80	1853	4.70	1.10	A+++	5.79	4.40	1047	4.40	0
0.53	1.80	2.42	2.41	8.24	11.07	95	A++	7.97	6.80	299	A+	4.40	5.80	1846	4.71	1.09	A+++	5.94	4.40	1036	4.40	0
0.59	1.78	2.34	2.71	8.15	10.69	95	A++	7.88	6.80	302	A+	4.42	5.80	1836	4.75	1.05	A+++	5.92	4.40	1040	4.40	0
0.52	1.85	2.36	2.37	8.47	10.82	95	A++	7.99	6.80	298	A+	4.24	5.80	1912	4.70	1.10	A+++	5.79	4.40	1063	4.40	0
0.56	1.78	2.42	2.58	8.15	11.07	95	A++	7.97	6.80	299	A+	4.39	5.80	1850	4.71	1.09	A+++	5.96	4.40	1034	4.40	0
0.56	1.78	2.42	2.58	8.15	11.07	95	A++	7.95	6.80	300</												

Combination tables

Indoor unit	Cooling capacity [kW]				Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]				Total heating capacity [kW]		
	Room A	Room B	Room C	Room D	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Min.	Nom.	Max.
1.5	1.80	---	---	---	1.73	1.80	2.96	0.42	0.34	0.58	1.88	---	---	---	1.25	1.88	4.10	0.29	0.51	1.23
2.0	2.00	---	---	---	1.78	2.00	3.08	0.45	0.38	0.62	2.46	---	---	---	1.28	2.46	4.26	0.30	0.66	1.29
2.5	2.50	---	---	---	1.85	2.50	3.65	0.48	0.48	0.81	3.08	---	---	---	1.33	3.08	4.73	0.32	0.86	1.38
3.5	3.50	---	---	---	1.95	3.50	4.90	0.49	0.76	1.33	4.31	---	---	---	1.45	4.31	5.31	0.33	1.39	1.68
4.2	4.20	---	---	---	1.98	4.20	5.33	0.49	1.01	1.47	---	5.18	---	---	1.49	5.18	6.16	0.34	1.63	1.90
5.0	5.00	---	---	---	2.05	5.00	6.03	0.46	1.30	1.74	---	6.15	---	---	1.86	6.15	7.40	0.43	1.74	2.77
6.0	6.00	---	---	---	2.15	6.00	6.80	0.46	1.77	2.28	---	7.38	---	---	2.15	7.38	9.00	0.53	2.15	3.11
7.1	7.10	---	---	---	2.26	7.10	7.45	0.49	2.53	2.83	---	8.74	---	---	2.45	8.74	9.36	0.57	2.71	3.45
1.5+1.5	1.50	1.50	---	---	1.98	3.00	4.79	0.45	0.56	1.02	1.85	1.85	---	---	1.45	3.70	7.43	0.41	0.86	1.84
1.5+2.0	1.50	2.00	---	---	2.01	3.50	4.96	0.49	0.69	1.11	1.84	2.46	---	---	1.51	4.30	7.81	0.41	1.01	2.00
1.5+2.5	1.50	2.50	---	---	2.03	4.00	5.28	0.44	0.83	1.25	1.84	3.06	---	---	1.65	4.90	8.00	0.45	1.17	2.07
1.5+3.5	1.50	3.50	---	---	2.05	5.00	6.17	0.42	1.16	1.59	1.83	4.27	---	---	1.94	6.10	8.55	0.52	1.64	2.36
1.5+4.2	1.50	4.20	---	---	2.12	5.70	6.52	0.46	1.43	1.79	1.84	5.16	---	---	2.14	7.00	8.90	0.55	1.94	2.58
1.5+5.0	1.50	5.00	---	---	2.20	6.50	7.12	0.47	1.70	2.01	1.85	6.15	---	---	2.38	8.00	10.43	0.50	2.11	2.92
1.5+6.0	1.48	5.92	---	---	2.32	7.40	7.77	0.51	2.16	2.38	1.80	7.20	---	---	2.66	9.00	10.63	0.52	2.30	2.68
1.5+7.1	1.40	6.60	---	---	2.47	8.00	8.43	0.54	2.45	2.81	1.67	7.93	---	---	2.96	9.60	10.65	0.55	2.47	2.42
2.0+2.0	2.00	2.00	---	---	1.95	4.00	5.41	0.46	0.84	1.34	2.45	2.45	---	---	1.65	4.90	8.00	0.32	1.16	2.32
2.0+2.5	2.00	2.50	---	---	2.00	4.50	5.85	0.46	0.99	1.50	2.44	3.06	---	---	1.80	5.50	8.17	0.35	1.34	2.33
2.0+3.5	2.00	3.50	---	---	2.10	5.50	6.51	0.46	1.35	1.79	2.44	4.26	---	---	2.09	6.70	8.72	0.40	1.70	2.44
2.0+4.2	2.00	4.20	---	---	2.17	6.20	6.91	0.46	1.64	2.00	2.45	5.15	---	---	2.28	7.60	9.08	0.44	1.98	2.67
2.0+5.0	2.00	5.00	---	---	2.25	7.00	7.45	0.47	1.95	2.21	2.43	6.07	---	---	2.52	8.50	10.61	0.52	2.28	3.01
2.0+6.0	1.85	5.55	---	---	2.39	7.40	8.08	0.51	2.16	2.57	2.33	6.98	---	---	2.79	9.30	10.80	0.54	2.42	2.75
2.0+7.1	1.76	6.24	---	---	2.53	8.00	8.65	0.54	2.45	3.00	2.11	7.49	---	---	3.10	9.60	10.90	0.57	2.47	2.66
2.5+2.5	2.50	2.50	---	---	2.05	5.00	6.28	0.42	1.17	1.69	3.05	3.05	---	---	1.94	6.10	8.54	0.39	1.68	2.37
2.5+3.5	2.50	3.50	---	---	2.15	6.00	6.75	0.46	1.55	1.93	3.04	4.26	---	---	2.23	7.30	9.10	0.52	2.02	2.67
2.5+4.2	2.50	4.20	---	---	2.22	6.70	7.23	0.46	1.89	2.20	3.06	5.14	---	---	2.44	8.20	9.37	0.54	2.28	2.83
2.5+5.0	2.47	4.93	---	---	2.32	7.40	7.80	0.50	2.16	2.39	3.00	6.00	---	---	2.66	9.00	10.70	0.54	2.51	3.10
2.5+6.0	2.35	5.65	---	---	2.46	8.00	8.35	0.54	2.45	2.75	2.82	6.78	---	---	2.94	9.60	10.90	0.55	2.63	2.78
2.5+7.1	2.08	5.92	---	---	2.60	8.00	8.65	0.54	2.45	3.10	2.50	7.10	---	---	3.23	9.60	10.90	0.59	2.50	2.70
3.5+3.5	3.50	3.50	---	---	2.25	7.00	7.45	0.46	2.04	2.31	4.25	4.25	---	---	2.52	8.50	9.55	0.55	2.47	2.87
3.5+4.2	3.50	4.20	---	---	2.35	7.70	7.81	0.50	2.47	2.57	4.09	4.91	---	---	2.71	9.00	10.16	0.57	2.69	3.19
3.5+5.0	3.29	4.71	---	---	2.46	8.00	7.98	0.53	2.45	2.63	3.91	5.59	---	---	2.94	9.50	10.92	0.58	2.66	3.14
3.5+6.0	2.95	5.05	---	---	2.58	8.00	8.61	0.54	2.49	3.04	3.54	6.06	---	---	3.21	9.60	11.03	0.57	2.48	2.77
3.5+7.1	2.64	5.36	---	---	2.74	8.00	8.64	0.58	2.46	2.86	3.17	6.43	---	---	3.52	9.60	11.05	0.63	2.42	2.61
4.2+4.2	4.00	4.00	---	---	2.44	8.00	7.82	0.53	2.66	2.74	4.75	4.75	---	---	2.91	9.50	9.98	0.59	2.55	2.95
4.2+5.0	3.65	4.35	---	---	2.54	8.00	8.17	0.53	2.45	2.82	4.38	5.22	---	---	3.13	9.60	10.93	0.60	2.59	3.20
4.2+6.0	3.29	4.71	---	---	2.68	8.00	8.63	0.58	2.49	3.15	3.95	5.65	---	---	3.41	9.60	11.05	0.61	2.39	2.80
4.2+7.1	2.97	5.03	---	---	2.83	8.00	8.81	0.62	2.46	3.38	3.57	6.03	---	---	3.70	9.60	11.07	0.66	2.38	2.60
5.0+5.0	4.00	4.00	---	---	2.65	8.00	8.33	0.57	2.39	2.78	4.80	4.80	---	---	3.35	9.60	11.10	0.63	2.46	3.12
5.0+6.0	3.64	4.36	---	---	2.79	8.00	8.81	0.62	2.35	3.15	4.36	5.24	---	---	3.62	9.60	11.12	0.62	2.35	2.73
5.0+7.1	3.31	4.69	---	---	2.94	8.00	9.08	0.62	2.35	3.32	3.97	5.63	---	---	3.93	9.60	11.14	0.66	2.33	2.57
6.0+6.0	4.00	4.00	---	---	2.93	8.00	9.42	0.62	2.35	3.49	4.80	4.80	---	---	3.90	9.60	11.14	0.63	2.27	2.55
6.0+7.1	3.66	4.34	---	---	3.22	8.00	9.44	0.58	2.34	3.57	4.40	5.20	---	---	4.20	9.60	11.16	0.67	2.26	2.54
7.1+7.1	4.00	4.00	---	---	3.38	8.00	9.47	0.61	2.30	3.57	4.80	4.80	---	---	4.51	9.60	11.20	0.73	2.20	2.48
1.5+1.5+1.5	1.50	1.50	1.50	---	2.00	4.50	6.40	0.44	0.90	1.41	1.83	1.83	1.83	---	1.80	5.50	9.95	0.40	1.14	2.27
1.5+1.5+2.0	1.50	1.50	2.00	---	2.05	5.00	6.56	0.48	1.04	1.50	1.83	1.83	2.44	---	1.94	6.10	10.13	0.41	1.32	2.35
1.5+1.5+2.5	1.50	1.50	2.50	---	2.10	5.50	6.72	0.48	1.21	1.59	1.83	1.83	3.05	---	2.09	6.70	10.21	0.43	1.49	2.38
1.5+1.5+3.5	1.50	1.50	3.50	---	2.20	6.50	7.13	0.48	1.55	1.82	1.85	1.85	4.31	---	2.38	8.00	10.32	0.47	1.88	2.50
1.5+1.5+4.2	1.50	1.50	4.20	---	2.28	7.20	7.60	0.48	1.86	2.03	1.81	1.81	5.08	---	2.58	8.70	10.32	0.49	2.15	2.50
1.5+1.5+5.0	1.39	1.39	4.63	---	2.39	7.40	8.10	0.52	1.87	2.21	1.74	1.74	5.81	---	2.79	9.30	10.49	0.50	2.21	2.58
1.5+1.5+6.0	1.33	1.33	5.33	---	2.52	8.00	8.55	0.55	2.15	2.45	1.58	6.33	---	3.07	9.50	11.14	0.51	2.20	2.50	
1.5+1.5+7.1	1.19	1.19	5.62	---	2.67	8.00	9.07	0.59	2.15	2.76	1.43	1.43	6.75	---	3.38	9.60	11.17	0.54	2.21	2.49
1.5+2.0+2.0	1.50	2.00	2.00	---	2.10	5.50	6.54	0.48	1.21	1.55	1.83	2.44	2.44	---	2.09	6.70	10.29	0.43	1.49	2.42
1.5+2.0+2.5	1.50	2.00	2.50	---	2.15	6.00	6.89	0.48	1.39	1.70	1.83	2.43	3.04	---	2.23	7.30	10.39	0.45	1.68	2.45
1.5+2.0+3.5	1.50	2.00	3.50	---	2.25	7.00	7.47	0.48	1.76	1.98	1.82	2.43	4.25	---	2.52	8.50	10.48	0.49	2.06	2.59
1.5+2.0+4.2	1.50	2.00	4.20	---	2.35	7.70	7.92	0.51	2.09	2.20	1.75	2.34	4.91	---	2.71	9.00	10.49	0.51	2.22	2.58
1.5+2.0+5.0	1.41	1.88	4.71	---	2.46	8.00	8.31	0.54	2.18											

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)				Seasonal data heating (warm climate)							
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
1.33	2.34	5.63	1.91	1.60	2.70	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
1.38	3.01	5.90	2.04	1.80	2.90	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
1.46	3.95	6.32	2.18	2.20	3.80	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
1.51	6.37	7.68	2.24	3.50	6.10	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
1.55	7.45	8.70	2.26	4.70	6.72	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
1.95	7.99	12.68	2.09	6.00	7.97	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
2.44	9.83	14.23	2.09	8.10	10.43	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
2.62	12.43	15.79	2.22	11.60	13.00	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
1.89	3.94	8.42	2.05	2.60	4.65	95	A++	6.96	3.00	151	A	3.88	3.27	1180	3.05	0.22	A+++	5.49	3.90	994	3.90	0
1.89	4.63	9.15	2.24	3.20	5.10	95	A++	7.09	3.50	173	A	3.88	3.27	1178	3.06	0.21	A+++	5.49	3.90	994	3.90	0
2.06	5.36	9.47	2.02	3.90	5.72	95	A++	7.18	4.00	195	A	3.89	3.27	1176	3.06	0.21	A+++	5.49	3.90	993	3.90	0
2.37	7.51	10.80	1.94	5.40	7.29	95	A++	7.33	5.00	239	A	3.92	3.57	1275	3.24	0.33	A+++	5.49	3.90	994	3.90	0
2.54	8.88	11.81	2.11	6.60	8.30	95	A++	7.34	5.70	272	A	3.92	3.57	1273	3.25	0.32	A+++	5.49	4.00	1019	4.00	0
2.28	9.66	13.36	2.15	7.80	9.20	95	A++	7.41	6.50	307	A+	4.01	4.27	1489	3.64	0.63	A+++	5.51	4.00	1016	4.00	0
2.37	10.53	12.27	2.32	9.90	10.90	95	A++	7.36	7.40	352	A+	4.03	4.27	1483	3.66	0.61	A+++	5.51	4.10	1042	4.10	0
2.50	11.31	11.56	2.48	11.30	13.00	95	A++	7.35	8.60	410	A+	4.04	4.27	1477	3.68	0.59	A+++	5.50	4.10	1042	4.10	0
1.46	5.31	10.62	2.11	3.90	6.12	95	A++	7.18	4.00	195	A	3.87	3.27	1183	3.06	0.21	A+++	5.49	3.90	994	3.90	0
1.59	6.14	10.66	2.11	4.60	7.00	95	A++	7.23	4.50	218	A	3.87	3.27	1181	3.06	0.21	A+++	5.50	3.90	993	3.90	0
1.85	7.79	11.17	2.11	6.20	8.30	95	A++	7.38	5.50	261	A	3.93	3.57	1271	3.25	0.32	A+++	5.49	4.00	1019	4.00	0
2.02	9.07	12.22	2.11	7.60	9.20	95	A++	7.39	6.20	294	A	3.93	3.57	1269	3.25	0.32	A+++	5.50	4.00	1019	4.00	0
2.37	10.44	13.78	2.15	9.00	10.11	95	A++	7.43	7.00	330	A+	4.04	4.27	1479	3.65	0.62	A+++	5.50	4.00	1017	4.00	0
2.45	11.08	12.59	2.32	9.90	11.80	95	A++	7.38	7.40	351	A+	4.05	4.27	1474	3.67	0.60	A+++	5.50	4.10	1043	4.10	0
2.62	11.31	12.17	2.48	11.30	13.80	95	A++	7.40	8.00	379	A+	4.07	4.27	1468	3.68	0.59	A+++	5.50	4.20	1068	4.20	0
1.76	7.69	10.85	1.94	5.40	7.80	95	A++	7.34	5.00	239	A	3.88	3.27	1179	3.07	0.20	A+++	5.50	3.90	993	3.90	0
2.37	9.25	12.22	2.11	7.10	8.82	95	A++	7.39	6.00	285	A	3.94	3.57	1268	3.25	0.32	A+++	5.51	4.00	1017	4.00	0
2.45	10.44	12.95	2.11	8.70	10.05	95	A++	7.45	6.70	315	A	3.95	3.57	1266	3.25	0.32	A+++	5.51	4.00	1016	4.00	0
2.45	11.49	14.19	2.27	9.90	11.00	95	A++	7.36	7.40	352	A+	4.07	4.27	1468	3.65	0.62	A+++	5.52	4.00	1015	4.00	0
2.54	12.04	12.72	2.48	11.30	12.60	95	A++	7.40	8.00	379	A+	4.08	4.27	1463	3.67	0.60	A+++	5.51	4.10	1040	4.10	0
2.71	11.45	12.36	2.48	11.30	14.19	95	A++	7.39	8.50	403	A+	4.10	4.27	1457	3.69	0.58	A+++	5.51	4.20	1066	4.20	0
2.54	11.31	13.14	2.11	9.40	10.57	95	A++	7.43	7.00	330	A+	4.04	4.27	1478	3.64	0.63	A+++	5.51	4.00	1015	4.00	0
2.62	12.32	15.25	2.27	11.40	11.76	95	A++	7.40	7.70	365	A+	4.05	4.27	1475	3.64	0.63	A+++	5.51	4.00	1015	4.00	0
2.67	12.18	14.37	2.44	11.30	12.02	95	A++	7.37	8.00	380	A+	4.04	4.97	1720	4.04	0.93	A+++	5.57	4.00	1005	4.00	0
2.62	11.36	12.68	2.48	11.50	13.91	95	A++	7.38	8.00	380	A+	4.06	4.97	1714	4.06	0.91	A+++	5.57	4.10	1031	4.10	0
2.88	11.08	11.95	2.65	11.30	13.09	95	A++	7.27	9.00	434	A+	4.07	4.97	1707	4.08	0.89	A+++	5.57	4.20	1056	4.20	0
2.71	11.68	11.82	2.44	12.20	12.52	95	A++	7.38	8.40	399	A+	4.06	4.27	1472	3.65	0.62	A+++	5.52	4.00	1015	4.00	0
2.75	11.86	14.65	2.44	11.20	12.91	95	A++	7.32	8.00	383	A+	4.11	4.97	1693	4.05	0.92	A+++	5.57	4.10	1030	4.10	0
2.80	10.94	12.81	2.65	11.50	14.44	95	A++	7.29	8.50	408	A+	4.12	4.97	1686	4.06	0.91	A+++	5.57	4.10	1031	4.10	0
3.01	10.90	11.90	2.82	11.30	15.45	95	A++	7.27	9.00	434	A+	4.14	4.97	1680	4.08	0.89	A+++	5.57	4.20	1056	4.20	0
2.88	11.26	14.28	2.61	11.00	12.70	95	A++	7.40	8.50	402	A+	4.00	6.23	2177	4.75	1.48	A+++	5.64	4.10	1018	4.10	0
2.84	10.76	12.49	2.82	10.80	14.42	95	A++	7.44	9.00	423	A+	4.02	6.23	2168	4.76	1.47	A+++	5.64	4.10	1018	4.10	0
3.01	10.67	11.76	2.82	10.80	15.21	95	A++	7.45	9.00	423	A+	4.03	6.23	2160	4.78	1.45	A+++	5.63	4.20	1043	4.20	0
2.88	10.39	11.67	2.82	10.80	15.99	95	A++	7.45	9.00	423	A+	4.03	6.23	2164	4.77	1.46	A+++	5.64	4.20	1043	4.20	0
3.05	10.35	11.62	2.70	10.70	16.34	95	A++	7.45	9.00	423	A+	4.04	6.23	2155	4.79	1.44	A+++	5.63	4.20	1043	4.20	0
3.36	10.07	11.86	2.90	10.60	16.36	95	A++	7.45	9.00	423	A+	4.04	6.23	2156	4.80	1.43	A+++	5.63	4.30	1069	4.30	0
1.85	5.22	10.39	2.02	4.20	6.44	95	A++	7.93	4.50	199	A	3.92	4.57	1631	3.85	0.72	A+++	5.87	3.60	858	3.60	0
1.89	6.05	10.76	2.19	4.80	6.86	95	A++	8.00	5.00	219	A	3.93	4.57	1626	3.85	0.72	A+++	5.86	3.70	883	3.70	0
1.98	6.82	10.89	2.19	5.60	7.29	95	A++	8.23	5.50	234	A	3.94	4.57	1621	3.85	0.72	A+++	5.85	3.70	885	3.70	0
2.15	8.61	11.44	2.19	7.20	8.40	95	A++	8.25	6.50	276	A	3.94	5.27	1871	4.26	1.01	A+++	5.88	3.80	905	3.80	0
2.24	9.84	11.44	2.19	8.50	9.40	95	A++	8.22	7.20	307	A	3.95	5.27	1865	4.26	1.01	A+++	5.86	3.80	907	3.80	0
2.28	10.12	11.81	2.36	8.60	10.20	95	A++	8.14	7.40	318	A+	4.04	6.23	2155	4.80	1.43	A+++	5.85	3.90	934	3.90	0
2.32	10.07	11.95	2.53	9.90	11.30	95	A++	8.09	8.00	346	A+	4.08	6.23	2138	4.82	1.41	A+++	5.80	4.00	964	4.00	0
2.45	10.12	11.91	2.69	9.90	12.70	95	A++	8.04	8.50	370	A+	4.11	6.23	2122	4.84	1.39	A+++	5.76	4.10	996	4.10	0
1.98	6.82	11.08	2.19	5.60	7.11	95	A++	8.21	5.50	235	A	3.93	4.57	1624	3.85	0.72	A+++	5.85	3.60	862	3.60	0
2.06	7.69	11.21	2.19	6.40	7.77	95	A++	8.20	6.00	256	A	3.96	4.57	1615	3.86	0.71	A+++	5.84	3.60	863	3.60	0
2.24	9.43	11.85	2.19	8.10	9.10	95	A++	8.23	7.00	298	A	3.9										

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)						Seasonal data heating (warm climate)					
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
2.24	10.76	11.08	2.36	9.40	10.30	95	A++	8.09	8.00	346	A+	4.57	6.23	1908	4.87	1.36	A+++	6.49	3.50	755	3.50	0
2.41	10.17	11.91	2.53	9.40	11.10	95	A++	8.09	8.00	346	A++	4.60	6.23	1894	4.87	1.36	A+++	6.48	3.60	778	3.60	0
2.50	10.12	11.91	2.69	9.40	11.90	95	A++	7.69	8.50	387	A++	4.62	6.23	1887	4.88	1.35	A+++	6.48	3.60	778	3.60	0
2.58	9.80	11.95	2.69	9.10	12.30	95	A++	7.62	9.00	413	A++	4.69	6.23	1857	4.89	1.34	A+++	6.41	3.80	830	3.80	0
2.54	9.43	11.60	2.86	9.10	12.90	95	A++	7.65	9.00	412	A++	4.73	6.23	1843	4.89	1.34	A+++	6.37	3.80	835	3.80	0
2.80	9.39	11.56	2.86	9.10	13.20	95	A++	7.71	9.00	409	A++	4.77	6.23	1829	4.90	1.33	A+++	6.34	3.90	862	3.90	0
2.32	10.17	11.95	2.53	8.90	10.80	95	A++	8.20	7.80	333	A+	4.59	6.23	1900	4.87	1.36	A+++	6.50	3.60	775	3.60	0
2.50	10.17	11.91	2.53	9.30	11.70	95	A++	7.74	8.50	385	A++	4.62	6.23	1887	4.88	1.35	A+++	6.49	3.60	776	3.60	0
2.58	10.12	11.91	2.69	9.30	12.30	95	A++	7.68	9.00	410	A++	4.64	6.23	1880	4.88	1.35	A+++	6.49	3.70	798	3.70	0
2.67	9.80	11.95	2.69	9.10	12.60	95	A++	7.68	9.00	411	A++	4.71	6.23	1850	4.89	1.34	A+++	6.42	3.80	828	3.80	0
2.62	9.43	11.60	2.86	9.10	13.20	95	A++	7.69	9.00	410	A++	4.75	6.23	1836	4.90	1.33	A+++	6.39	3.90	855	3.90	0
2.88	9.39	11.56	3.03	9.10	13.50	95	A++	7.71	9.00	409	A++	4.78	6.23	1822	4.90	1.33	A+++	6.35	3.90	860	3.90	0
2.67	10.12	11.91	2.69	9.20	12.00	95	A++	7.74	9.00	407	A++	4.64	6.23	1879	4.88	1.35	A+++	6.51	3.70	796	3.70	0
2.75	10.35	11.91	2.82	9.20	12.90	95	A++	7.74	9.00	407	A++	4.65	6.23	1872	4.88	1.35	A+++	6.50	3.70	796	3.70	0
2.88	9.75	11.91	2.86	9.10	13.08	95	A++	7.74	9.00	407	A++	4.73	6.23	1843	4.90	1.33	A+++	6.44	3.80	826	3.80	0
2.88	9.43	11.56	3.03	9.00	13.20	95	A++	7.76	9.00	406	A++	4.77	6.23	1829	4.90	1.33	A+++	6.40	3.90	853	3.90	0
2.84	10.30	11.86	2.82	9.20	13.19	95	A++	7.75	9.00	407	A++	4.67	6.23	1865	4.89	1.34	A+++	6.52	3.70	795	3.70	0
2.97	9.89	11.91	2.99	9.10	13.08	95	A++	7.75	9.00	407	A++	4.75	6.23	1835	4.90	1.33	A+++	6.45	3.90	847	3.90	0
3.01	9.43	11.56	2.70	9.00	13.60	95	A++	7.76	9.00	406	A++	4.78	6.23	1822	4.90	1.33	A+++	6.41	3.90	851	3.90	0
3.10	9.57	11.73	2.99	8.90	13.30	95	A++	7.75	9.00	407	A++	4.77	6.23	1828	4.90	1.33	A+++	6.46	3.90	845	3.90	0
2.41	10.17	11.95	2.53	9.40	11.40	95	A++	8.21	8.00	341	A++	4.61	6.23	1892	4.88	1.35	A+++	6.48	3.60	777	3.60	0
2.58	10.17	11.91	2.69	9.30	12.30	95	A++	7.75	8.70	393	A++	4.64	6.23	1879	4.89	1.34	A+++	6.47	3.70	800	3.70	0
2.67	10.35	11.91	2.69	9.30	12.90	95	A++	7.75	9.00	407	A++	4.66	6.23	1872	4.90	1.33	A+++	6.47	3.70	801	3.70	0
2.80	9.98	11.95	2.86	9.10	12.90	95	A++	7.74	9.00	407	A++	4.73	6.23	1842	4.91	1.32	A+++	6.40	3.80	831	3.80	0
2.80	9.43	11.60	2.86	9.10	13.20	95	A++	7.76	9.00	406	A++	4.77	6.23	1828	4.91	1.32	A+++	6.36	3.90	858	3.90	0
2.97	9.39	11.56	2.70	9.10	13.50	95	A++	7.77	9.00	405	A++	4.80	6.23	1815	4.91	1.32	A+++	6.32	4.00	885	4.00	0
2.75	10.30	11.91	2.82	9.20	12.50	95	A++	7.78	9.00	405	A++	4.66	6.23	1871	4.90	1.33	A+++	6.49	3.70	799	3.70	0
2.84	10.26	11.91	2.82	9.20	13.04	95	A++	7.79	9.00	405	A++	4.67	6.23	1864	4.90	1.33	A+++	6.48	3.70	799	3.70	0
2.97	9.89	11.91	2.99	9.10	13.08	95	A++	7.78	9.00	405	A++	4.75	6.23	1835	4.91	1.32	A+++	6.41	3.90	851	3.90	0
3.01	9.43	11.56	3.03	9.00	13.60	95	A++	7.79	9.00	404	A++	4.79	6.23	1821	4.91	1.32	A+++	6.38	3.90	856	3.90	0
2.97	10.21	11.86	2.99	9.20	13.19	95	A++	7.79	9.00	405	A++	4.69	6.23	1857	4.90	1.33	A+++	6.50	3.70	797	3.70	0
3.05	9.84	11.91	2.99	9.10	13.24	95	A++	7.79	9.00	405	A++	4.77	6.23	1828	4.91	1.32	A+++	6.43	3.90	850	3.90	0
3.18	9.71	11.73	2.70	8.90	13.30	95	A++	7.79	9.00	404	A++	4.79	6.23	1821	4.92	1.31	A+++	6.44	3.90	848	3.90	0
2.97	9.66	11.91	2.82	9.20	12.60	95	A++	7.81	9.00	404	A++	4.66	6.23	1869	4.93	1.30	A+++	6.49	3.70	798	3.70	0
3.05	10.30	11.86	2.99	9.20	13.05	95	A++	7.81	9.00	404	A++	4.68	6.23	1862	4.93	1.30	A+++	6.49	3.70	799	3.70	0
3.18	9.89	11.91	2.99	9.00	13.25	95	A++	7.80	9.00	404	A++	4.76	6.23	1833	4.94	1.29	A+++	6.41	3.90	851	3.90	0
3.27	10.21	11.86	2.70	9.20	13.22	95	A++	7.82	9.00	403	A++	4.70	6.23	1855	4.94	1.29	A+++	6.50	3.70	797	3.70	0
2.50	10.17	11.95	2.53	9.40	11.70	95	A++	7.78	8.50	382	A++	4.62	6.23	1884	4.89	1.34	A+++	6.49	3.60	777	3.60	0
2.67	10.35	11.91	2.69	9.30	12.11	95	A++	7.76	9.00	406	A++	4.66	6.23	1871	4.90	1.33	A+++	6.47	3.70	800	3.70	0
2.75	10.30	11.91	2.82	9.20	13.02	95	A++	7.76	9.00	406	A++	4.68	6.23	1864	4.90	1.33	A+++	6.47	3.70	800	3.70	0
2.88	9.89	11.95	2.86	9.10	13.07	95	A++	7.76	9.00	406	A++	4.75	6.23	1835	4.91	1.32	A+++	6.40	3.90	853	3.90	0
2.93	9.43	11.60	3.03	9.10	13.50	95	A++	7.77	9.00	405	A++	4.79	6.23	1821	4.92	1.31	A+++	6.36	3.90	858	3.90	0
2.88	10.30	11.91	2.82	9.20	12.30	95	A++	7.77	9.00	406	A++	4.68	6.23	1863	4.90	1.33	A+++	6.49	3.70	798	3.70	0
2.97	10.21	11.91	2.82	9.20	13.04	95	A++	7.77	9.00	406	A++	4.69	6.23	1857	4.91	1.32	A+++	6.48	3.70	799	3.70	0
3.05	9.84	11.91	2.99	9.00	13.25	95	A++	7.76	9.00	406	A++	4.77	6.23	1828	4.92	1.31	A+++	6.41	3.90	851	3.90	0
3.10	9.43	11.56	2.70	9.00	13.60	95	A++	7.78	9.00	405	A++	4.80	6.23	1814	4.92	1.31	A+++	6.38	4.00	878	4.00	0
3.05	10.12	11.86	2.99	9.20	13.21	95	A++	7.78	9.00	405	A++	4.71	6.23	1850	4.91	1.32	A+++	6.50	3.80	819	3.80	0
3.27	9.75	11.91	2.70	9.00	13.25	95	A++	7.77	9.00	406	A++	4.79	6.23	1821	4.92	1.31	A+++	6.43	3.90	849	3.90	0
3.05	10.30	11.91	2.99	9.20	12.74	95	A++	7.79	9.00	405	A++	4.68	6.23	1861	4.94	1.29	A+++	6.49	3.70	798	3.70	0
3.18	10.21	11.86	2.99	9.20	13.22	95	A++	7.79	9.00	404	A++	4.70	6.23	1855	4.94	1.29	A+++	6.49	3.70	798	3.70	0
3.27	9.84	11.91	2.70	9.00	13.09	95	A++	7.79	9.00	405	A++	4.77	6.23	1826	4.95	1.28	A+++	6.42	3.90	851	3.90	0
3.36	10.12	11.86	2.70	9.20	13.22	95	A++	7.80	9.00	404	A++	4.72	6.23	1847	4.94	1.29	A+++	6.50	3.80	819	3.80	0

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)						Seasonal data heating (warm climate)					
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.28	0.53	1.31	1.29	2.43	5.98	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
0.34	0.67	1.37	1.55	3.05	6.25	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
0.36	0.88	1.47	1.64	4.04	6.71	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
0.38	1.40	1.93	1.73	6.42	8.84	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
0.40	1.63	2.06	1.82	7.45	9.42	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
0.47	1.76	2.39	2.13	8.08	10.92	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
0.58	2.25	2.86	2.66	10.32	13.09	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
0.65	2.81	3.01	2.97	12.88	13.77	95	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
0.37	0.88	1.85	1.68	4.03	8.47	95	A++	7.08	3.00	149	A	3.87	3.50	1264	3.18	0.32	A+++	5.85	3.90	933	3.90	0
0.35	1.04	2.01	1.59	4.76	9.20	95	A++	7.22	3.50	170	A	3.88	3.50	1262	3.18	0.32	A+++	5.85	3.90	933	3.90	0
0.37	1.20	2.08	1.68	5.50	9.52	95	A++	7.31	4.00	192	A	3.89	3.50	1259	3.19	0.31	A+++	5.85	3.90	932	3.90	0
0.44	1.68	2.37	2.02	7.69	10.85	95	A++	7.45	5.00	235	A	3.91	3.80	1360	3.37	0.43	A+++	5.86	3.90	932	3.90	0
0.42	1.99	2.59	1.94	9.11	11.85	95	A++	7.45	5.70	268	A	3.92	3.80	1357	3.37	0.43	A+++	5.86	4.00	956	4.00	0
0.44	2.17	2.93	2.02	9.94	13.41	95	A++	7.51	6.50	303	A+	4.00	4.50	1573	3.77	0.73	A+++	5.89	4.00	950	4.00	0
0.48	2.47	2.72	2.19	11.31	12.45	95	A++	7.45	7.50	352	A+	4.01	4.50	1570	3.79	0.71	A+++	5.89	4.10	974	4.10	0
0.52	2.90	2.70	2.37	13.28	12.36	95	A++	7.43	8.60	406	A+	4.02	4.50	1567	3.81	0.69	A+++	5.89	4.10	974	4.10	0
0.37	1.19	2.33	1.68	5.45	10.66	95	A++	7.30	4.00	192	A	3.86	3.50	1267	3.19	0.31	A+++	5.85	3.90	933	3.90	0
0.39	1.37	2.34	1.76	6.28	10.71	95	A++	7.35	4.50	215	A	3.87	3.50	1265	3.19	0.31	A+++	5.86	3.90	932	3.90	0
0.47	1.75	2.45	2.15	8.01	11.21	95	A++	7.49	5.50	257	A	3.92	3.80	1355	3.37	0.43	A+++	5.85	4.00	956	4.00	0
0.58	2.04	2.68	2.67	9.34	12.27	95	A++	7.50	6.20	290	A	3.93	3.80	1353	3.38	0.42	A+++	5.86	4.00	956	4.00	0
0.59	2.35	3.02	2.71	10.76	13.82	95	A++	7.52	7.00	326	A+	4.03	4.50	1564	3.77	0.73	A+++	5.89	4.00	951	4.00	0
0.61	2.62	2.72	2.80	12.00	12.45	95	A++	7.48	7.50	351	A+	4.03	4.50	1560	3.79	0.71	A+++	5.89	4.10	975	4.10	0
0.65	2.90	2.93	2.97	13.28	13.41	95	A++	7.49	8.00	374	A+	4.04	4.50	1557	3.81	0.69	A+++	5.89	4.20	999	4.20	0
0.44	1.73	2.38	2.02	7.92	10.89	95	A++	7.46	5.00	235	A	3.88	3.50	1263	3.20	0.30	A+++	5.86	3.90	932	3.90	0
0.56	2.08	2.70	2.58	9.52	12.36	95	A++	7.48	6.00	281	A	3.93	3.80	1352	3.38	0.42	A+++	5.87	4.00	954	4.00	0
0.61	2.35	2.93	2.80	10.76	13.41	95	A++	7.55	6.70	311	A	3.94	3.80	1349	3.38	0.42	A+++	5.87	4.00	953	4.00	0
0.62	2.58	3.11	2.84	11.81	14.23	95	A++	7.46	7.50	352	A+	4.05	4.50	1552	3.78	0.72	A+++	5.90	4.00	948	4.00	0
0.63	2.76	2.79	2.88	12.64	12.77	95	A++	7.49	8.00	374	A+	4.06	4.50	1549	3.80	0.70	A+++	5.90	4.10	972	4.10	0
0.68	2.89	3.18	3.10	13.23	14.55	95	A++	7.47	8.50	398	A+	4.07	4.50	1546	3.82	0.68	A+++	5.90	4.20	996	4.20	0
0.61	2.54	2.90	2.80	11.63	13.27	95	A++	7.53	7.00	326	A+	4.03	4.50	1561	3.77	0.73	A+++	5.90	4.00	949	4.00	0
0.66	2.77	3.25	3.01	12.68	14.87	95	A++	7.48	7.70	360	A+	4.04	4.50	1558	3.77	0.73	A+++	5.90	4.00	949	4.00	0
0.67	2.73	3.15	3.05	12.50	14.42	95	A++	7.46	8.00	375	A+	4.09	5.20	1777	4.17	1.03	A+++	5.96	4.00	939	4.00	0
0.68	2.77	3.16	3.10	12.68	14.46	95	A++	7.47	8.00	375	A+	4.11	5.20	1770	4.19	1.01	A+++	5.96	4.10	963	4.10	0
0.72	2.73	3.08	3.31	12.50	13.78	95	A++	7.35	9.00	429	A+	4.13	5.20	1763	4.21	0.99	A+++	5.96	4.20	986	4.20	0
0.68	2.62	3.25	3.10	12.00	14.87	95	A++	7.42	8.00	377	A+	4.05	4.50	1555	3.77	0.73	A+++	5.90	4.00	948	4.00	0
0.69	2.78	3.21	3.14	12.73	14.69	95	A++	7.41	8.00	378	A+	4.16	5.20	1748	4.17	1.03	A+++	5.90	4.10	962	4.10	0
0.71	2.74	3.15	3.23	12.55	14.42	95	A++	7.38	8.50	404	A+	4.18	5.20	1741	4.19	1.01	A+++	5.96	4.10	962	4.10	0
0.74	2.69	3.07	3.40	12.32	14.05	95	A++	7.35	9.00	429	A+	4.19	5.20	1734	4.21	0.99	A+++	5.96	4.20	986	4.20	0
0.71	2.71	3.13	3.27	12.41	14.32	95	A++	7.49	8.50	397	A+	4.05	6.46	2229	4.87	1.59	A+++	6.04	4.10	950	4.10	0
0.71	2.67	3.05	3.23	12.22	13.96	95	A++	7.54	9.00	418	A+	4.07	6.46	2220	4.89	1.57	A+++	6.04	4.10	950	4.10	0
0.78	2.63	2.83	3.57	12.04	12.95	95	A++	7.55	9.00	417	A+	4.09	6.46	2211	4.91	1.55	A+++	6.04	4.20	973	4.20	0
0.71	2.65	2.80	3.27	12.13	12.81	95	A++	7.55	9.00	418	A+	4.08	6.46	2215	4.90	1.56	A+++	6.04	4.20	973	4.20	0
0.79	2.62	2.79	3.61	12.00	12.77	95	A++	7.56	9.00	417	A+	4.10	6.46	2206	4.91	1.55	A+++	6.04	4.20	973	4.20	0
0.84	2.60	2.78	3.83	11.90	12.72	95	A++	7.56	9.00	417	A+	4.09	6.46	2207	4.93	1.53	A+++	6.04	4.30	997	4.30	0
0.44	1.20	2.28	2.02	5.50	10.43	95	A++	8.03	4.50	197	A+	4.00	4.80	1679	3.97	0.83	A+++	5.78	3.60	871	3.60	0
0.46	1.38	2.36	2.11	6.32	10.80	95	A++	8.10	5.00	217	A+	4.01	4.80	1674	3.98	0.82	A+++	5.77	3.70	897	3.70	0
0.48	1.59	2.39	2.19	7.28	10.94	95	A++	8.32	5.50	232	A+	4.02	4.80	1669	3.98	0.82	A+++	5.76	3.70	899	3.70	0
0.52	2.05	2.51	2.37	9.39	11.49	95	A++	8.33	6.50	273	A+	4.02	5.50	1914	4.38	1.12	A+++	5.79	3.80	919	3.80	0
0.56	2.29	2.51	2.58	10.49	11.49	95	A++	8.29	7.20	304	A+	4.03	5.50	1908	4.39	1.11	A+++	5.78	3.80	921	3.80	0
0.56	2.48	2.61	2.58	11.36	11.95	95	A++	8.22	7.50	320	A+	4.12	6.46	2191	4.93	1.53	A+++	5.76	3.90	947	3.90	0
0.57	2.48	2.80	2.62	11.36	12.81	95	A++	8.16	8.00	344	A+	4.15	6.46	2175	4.95	1.51	A+++	5.72	4.00	979	4.00	0
0.61	2.70	2.79	2.80	12.36	12.77	95	A++	8.09	8.50	368	A+	4.18	6.46	2159	4.97	1.49	A+++	5.68	4.10	1011	4.10	0
0.48	1.60	2.43	2.19	7.33	11.12	95	A++	8.30	5.50	232	A+	4.01	4.80	1672	3.98	0.82	A+++	5.76	3.60	875	3.60	0
0.50	1.77	2.46	2.28	8.11	11.26	95	A++	8.30	6.00	253	A+	4.04	4.80	1663	3.99	0.81	A+++	5.75	3.60	877	3.60	0
0.54	2.21	2.60	2.45	10.12	11.90	95	A++	8.32	7.00	295	A+	4.02										

Combination tables

Indoor unit	Cooling capacity [kW]					Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]				Total heating capacity [kW]			
	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.
1.5+4.2+4.2	1.36	3.82	3.82	---	---	2.83	9.00	8.69	0.55	2.73	2.51	2.53	12.50	11.50	1.52	4.24	4.24	---	---	3.46	10.00	10.90
1.5+4.2+5.0	1.26	3.53	4.21	---	---	2.95	9.00	8.88	0.56	2.62	2.52	2.57	12.00	11.60	1.40	3.93	4.67	---	---	3.69	10.00	11.03
1.5+4.2+6.0	1.15	3.23	4.62	---	---	3.10	9.00	9.51	0.59	2.58	2.90	2.69	11.90	13.30	1.28	3.59	5.13	---	---	3.98	10.00	11.27
1.5+4.2+7.1	1.05	2.95	4.99	---	---	3.32	9.00	9.53	0.57	2.58	2.90	2.70	11.80	13.27	1.17	3.28	5.55	---	---	4.29	10.00	11.30
1.5+5.0+5.0	1.17	3.91	3.91	---	---	3.07	9.00	9.27	0.59	2.52	2.66	2.69	11.60	12.20	1.30	4.35	4.35	---	---	3.92	10.00	11.17
1.5+5.0+6.0	1.08	3.60	4.32	---	---	3.35	9.00	9.70	0.56	2.51	2.91	2.70	11.50	13.40	1.20	4.00	4.80	---	---	4.21	10.00	11.41
1.5+5.0+7.1	0.99	3.31	4.70	---	---	3.53	9.00	9.72	0.60	2.51	2.92	2.80	11.50	13.40	1.10	3.68	5.22	---	---	4.53	10.00	11.44
1.5+6.0+6.0	1.00	4.00	4.00	---	---	3.53	9.00	10.20	0.60	2.47	3.25	2.80	11.40	15.00	1.11	4.44	4.44	---	---	4.50	10.00	11.65
1.5+6.0+7.1	0.92	3.70	4.38	---	---	3.53	9.00	10.22	0.60	2.47	3.25	2.80	11.40	15.00	1.32	3.97	4.70	---	---	4.81	10.00	11.68
2.0+2.0+2.0	2.00	2.00	2.00	---	---	2.31	6.00	6.80	0.46	1.33	1.63	2.11	6.10	7.50	2.50	2.50	2.50	---	---	2.33	7.50	10.49
2.0+2.0+2.5	2.00	2.00	2.50	---	---	2.36	6.50	7.17	0.46	1.52	1.78	2.11	7.00	8.20	2.46	2.46	3.08	---	---	2.48	8.00	10.57
2.0+2.0+3.5	2.00	2.00	3.50	---	---	2.48	7.50	7.88	0.50	1.93	2.10	2.27	8.90	9.70	2.40	2.40	4.20	---	---	2.77	9.00	10.68
2.0+2.0+4.2	2.00	2.00	4.20	---	---	2.58	8.20	8.31	0.50	2.27	2.33	2.27	10.40	10.70	2.29	2.29	4.81	---	---	2.97	9.40	10.68
2.0+2.0+5.0	1.78	4.44	---	---	2.70	8.00	8.71	0.52	2.09	2.46	2.40	9.60	11.30	2.22	2.22	5.56	---	---	3.20	10.00	10.90	
2.0+2.0+6.0	1.70	1.70	5.10	---	---	2.85	8.50	9.24	0.53	2.33	2.76	2.44	10.70	12.70	2.00	2.00	6.00	---	---	3.49	10.00	11.14
2.0+2.0+7.1	1.62	1.62	5.76	---	---	3.01	9.00	9.54	0.56	2.62	2.96	2.57	12.00	13.60	1.80	1.80	6.40	---	---	3.80	10.00	11.18
2.0+2.5+2.5	2.00	2.50	2.50	---	---	2.42	7.00	7.52	0.46	1.71	1.94	2.11	7.90	8.90	2.43	3.04	3.04	---	---	2.62	8.50	10.59
2.0+2.5+3.5	1.88	2.34	3.28	---	---	2.55	7.50	8.22	0.50	1.92	2.27	2.27	8.80	10.40	2.33	2.91	4.07	---	---	2.92	9.30	10.68
2.0+2.5+4.2	1.84	2.30	3.86	---	---	2.66	8.00	8.53	0.52	2.15	2.44	2.40	9.90	11.30	2.30	2.87	4.83	---	---	3.12	10.00	10.77
2.0+2.5+5.0	1.68	2.11	4.21	---	---	2.77	8.00	8.83	0.52	2.09	2.52	2.40	9.60	11.60	2.11	2.63	5.26	---	---	3.35	10.00	11.11
2.0+2.5+6.0	1.66	2.07	4.97	---	---	2.92	8.70	9.36	0.56	2.44	2.83	2.57	11.20	13.00	1.90	2.38	5.71	---	---	3.63	10.00	11.14
2.0+2.5+7.1	1.55	1.94	5.51	---	---	3.08	9.00	9.56	0.59	2.62	2.96	2.69	12.00	13.60	1.72	2.16	6.12	---	---	3.95	10.00	11.18
2.0+3.5+3.5	1.78	3.11	3.11	---	---	2.70	8.00	8.67	0.52	2.15	2.51	2.40	9.90	11.50	2.22	3.89	3.89	---	---	3.20	10.00	10.77
2.0+3.5+4.2	1.75	3.07	3.68	---	---	2.80	8.50	8.68	0.55	2.42	2.51	2.53	11.10	11.50	2.06	3.61	4.33	---	---	3.41	10.00	10.97
2.0+3.5+5.0	1.66	2.90	4.14	---	---	2.92	8.70	8.87	0.56	2.44	2.52	2.57	11.20	11.60	1.90	3.33	4.76	---	---	3.63	10.00	11.34
2.0+3.5+6.0	1.57	2.74	4.70	---	---	3.07	9.00	9.50	0.59	2.58	2.90	2.69	11.90	13.30	1.74	3.04	5.22	---	---	3.92	10.00	11.34
2.0+3.5+7.1	1.43	2.50	5.07	---	---	3.32	9.00	9.51	0.57	2.58	2.90	2.70	11.80	13.30	1.59	2.78	5.63	---	---	4.23	10.00	11.35
2.0+4.2+4.2	1.67	3.51	3.51	---	---	2.91	8.70	8.69	0.55	2.54	2.51	2.53	11.70	11.50	1.92	4.04	4.04	---	---	3.60	10.00	10.98
2.0+4.2+5.0	1.61	3.38	4.02	---	---	3.02	9.00	9.09	0.59	2.62	2.64	2.69	12.00	12.20	1.79	3.75	4.46	---	---	3.84	10.00	11.35
2.0+4.2+6.0	1.48	3.10	4.43	---	---	3.32	9.00	9.51	0.57	2.58	2.90	2.70	11.90	13.30	1.64	3.44	4.92	---	---	4.12	10.00	11.37
2.0+4.2+7.1	1.35	2.84	4.80	---	---	3.49	9.00	9.53	0.60	2.58	2.90	2.80	11.80	13.30	1.50	3.16	5.34	---	---	4.44	10.00	11.40
2.0+5.0+5.0	1.50	3.75	3.75	---	---	3.14	9.00	9.27	0.59	2.52	2.66	2.69	11.60	12.20	1.67	4.17	4.17	---	---	4.07	10.00	11.06
2.0+5.0+6.0	1.38	3.46	4.15	---	---	3.35	9.00	9.70	0.56	2.51	2.91	2.70	11.50	13.40	1.54	3.85	4.62	---	---	4.36	10.00	11.29
2.0+5.0+7.1	1.28	3.19	4.53	---	---	3.53	9.00	9.72	0.60	2.51	2.92	2.80	11.50	13.40	1.42	3.55	5.04	---	---	4.67	10.00	11.33
2.0+6.0+6.0	1.29	3.86	3.86	---	---	3.53	9.00	10.20	0.60	2.47	3.25	2.80	11.40	15.00	1.43	4.29	4.29	---	---	4.64	10.00	11.53
2.0+6.0+7.1	1.19	3.58	4.23	---	---	3.70	9.00	10.65	0.64	2.47	3.60	3.00	11.40	16.60	1.32	3.97	4.70	---	---	4.96	10.00	11.56
2.5+2.5+2.5	2.50	2.50	2.50	---	---	2.48	7.50	7.87	0.50	1.93	2.10	2.27	8.90	9.70	3.33	3.33	3.33	---	---	2.77	10.00	10.72
2.5+2.5+3.5	2.35	2.35	3.29	---	---	2.63	8.00	8.44	0.52	2.15	2.39	2.40	9.90	11.00	2.94	2.94	4.12	---	---	3.06	10.00	10.92
2.5+2.5+4.2	2.17	2.17	3.65	---	---	2.73	8.00	8.65	0.52	2.15	2.50	2.40	9.90	11.50	2.72	2.72	4.57	---	---	3.26	10.00	11.04
2.5+2.5+5.0	2.13	2.13	4.25	---	---	2.85	8.50	8.84	0.56	2.33	2.52	2.57	10.70	11.60	2.50	2.50	5.00	---	---	3.49	10.00	11.33
2.5+2.5+6.0	2.05	2.05	4.91	---	---	2.99	9.00	9.37	0.56	2.62	2.83	2.57	12.00	13.00	2.27	2.27	5.45	---	---	3.77	10.00	11.35
2.5+2.5+7.1	1.86	1.86	5.28	---	---	3.32	9.00	9.58	0.57	2.62	2.96	2.70	12.00	13.60	2.07	2.07	5.87	---	---	4.09	10.00	11.37
2.5+3.5+3.5	2.11	2.95	3.95	---	---	2.77	8.00	8.68	0.55	2.14	2.51	2.53	9.90	11.50	2.63	3.68	3.68	---	---	3.35	10.00	11.19
2.5+3.5+4.2	2.08	2.92	3.50	---	---	2.88	8.50	8.69	0.55	2.42	2.51	2.53	11.10	11.50	2.45	3.43	4.12	---	---	3.55	10.00	11.20
2.5+3.5+5.0	2.05	2.86	4.09	---	---	2.99	9.00	8.89	0.59	2.62	2.52	2.69	12.00	11.60	2.27	3.18	4.55	---	---	3.77	10.00	11.34
2.5+3.5+6.0	1.88	2.63	4.50	---	---	3.14	9.00	9.51	0.59	2.58	2.90	2.69	11.80	13.30	2.08	2.92	5.00	---	---	4.07	10.00	11.35
2.5+3.5+7.1	1.72	2.40	4.88	---	---	3.33	9.00	9.53	0.57	2.57	2.90	2.70	11.80	13.30	1.91	2.67	5.42	---	---	4.39	10.00	11.40
2.5+4.2+4.2	2.06	3.47	3.47	---	---	2.98	9.00	8.71	0.59	2.72	2.51	2.69	12.50	11.50	2.29	3.85	3.85	---	---	3.75	10.00	11.20
2.5+4.2+5.0	1.92	3.23	3.85	---	---	3.10	9.00	9.10	0.59	2.58	2.64	2.69	11.90	12.20	2.14	3.59	4.27	---	---	3.98	10.00	11.35
2.5+4.2+6.0	1.77	2.98	4.25	---	---	3.32	9.00	9.52	0.57	2.58	2.90	2.70	11.80	13.30	1.97							

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)					Seasonal data heating (warm climate)						
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.68	2.69	2.92	3.10	12.32	13.36	95	A++	8.26	9.90	419	A+	4.12	6.46	2194	4.93	1.53	A+++	5.86	3.80	907	3.80	0
0.71	2.59	2.82	3.23	11.86	12.91	95	A++	8.18	9.00	385	A+	4.18	6.46	2162	4.94	1.52	A+++	5.78	3.90	944	3.90	0
0.71	2.54	2.80	3.27	11.63	12.81	95	A++	8.19	9.00	385	A+	4.21	6.46	2147	4.96	1.50	A+++	5.74	4.00	975	4.00	0
0.76	2.49	2.78	3.48	11.40	12.72	95	A++	8.20	9.00	384	A+	4.24	6.46	2132	4.98	1.48	A+++	5.70	4.10	1007	4.10	0
0.71	2.50	2.83	3.23	11.45	12.95	95	A++	8.21	9.00	384	A+	4.19	6.46	2156	4.95	1.51	A+++	5.78	3.90	944	3.90	0
0.71	2.46	2.75	3.27	11.26	12.59	95	A++	8.22	9.00	384	A+	4.22	6.46	2140	4.97	1.49	A+++	5.74	4.00	975	4.00	0
0.79	2.41	2.73	3.61	11.03	12.49	95	A++	8.22	9.00	383	A+	4.25	6.46	2125	4.99	1.47	A+++	5.70	4.10	1006	4.10	0
0.72	2.42	2.67	3.31	11.08	12.22	95	A++	8.22	9.00	383	A+	4.24	6.46	2133	4.97	1.49	A+++	5.75	4.00	974	4.00	0
0.79	2.40	2.66	3.61	10.99	12.17	95	A++	8.23	9.00	383	A+	4.26	6.46	2119	4.99	1.47	A+++	5.70	4.10	1006	4.10	0
0.50	1.77	2.50	2.28	8.11	11.44	95	A++	8.30	6.00	253	A+	4.03	4.80	1665	4.00	0.80	A+++	5.75	3.60	877	3.60	0
0.52	1.92	2.54	2.37	8.79	11.62	95	A++	8.30	6.50	275	A+	4.04	4.80	1660	4.00	0.80	A+++	5.74	3.60	878	3.60	0
0.56	2.27	2.66	2.58	10.39	12.17	95	A++	8.28	7.50	317	A+	4.06	5.60	1931	4.46	1.14	A+++	5.77	3.70	897	3.70	0
0.60	2.47	2.66	2.75	11.31	12.17	95	A++	8.13	8.20	353	A+	4.07	5.60	1925	4.46	1.14	A+++	5.76	3.70	899	3.70	0
0.61	2.76	2.82	2.80	12.64	12.91	95	A++	8.14	8.00	344	A+	4.16	6.46	2174	4.95	1.51	A+++	5.74	3.80	927	3.80	0
0.62	2.72	2.80	2.84	12.45	12.81	95	A++	8.08	8.50	368	A+	4.19	6.46	2158	4.97	1.49	A+++	5.70	3.90	958	3.90	0
0.66	2.67	2.79	3.01	12.22	12.77	95	A++	8.04	9.00	392	A+	4.22	6.46	2142	4.99	1.47	A+++	5.65	4.00	990	4.00	0
0.54	2.15	2.63	2.45	9.84	12.04	95	A++	8.32	7.00	295	A+	4.07	5.00	1716	4.11	0.89	A+++	5.78	3.60	871	3.60	0
0.58	2.45	2.66	2.67	11.22	12.17	95	A++	8.28	7.50	317	A+	4.09	5.60	1913	4.46	1.14	A+++	5.80	3.70	893	3.70	0
0.63	2.77	2.87	2.88	12.68	13.14	95	A++	8.11	8.00	345	A+	4.11	5.60	1908	4.46	1.14	A+++	5.79	3.70	894	3.70	0
0.63	2.73	2.82	2.88	12.50	12.91	95	A++	8.14	8.00	344	A+	4.19	6.46	2154	4.95	1.51	A+++	5.77	3.90	947	3.90	0
0.64	2.68	2.80	2.93	12.27	12.81	95	A++	8.05	8.70	378	A+	4.22	6.46	2139	4.97	1.49	A+++	5.72	4.00	978	4.00	0
0.69	2.66	2.79	3.14	12.18	12.77	95	A++	8.05	9.00	392	A+	4.25	6.46	2124	4.99	1.47	A+++	5.68	4.00	985	4.00	0
0.65	2.76	2.87	2.97	12.64	13.14	95	A++	8.12	8.00	345	A+	4.25	6.46	2126	4.94	1.52	A+++	5.98	3.90	913	3.90	0
0.68	2.75	2.97	3.10	12.59	13.59	95	A++	8.07	8.50	369	A+	4.26	6.46	2120	4.94	1.52	A+++	5.97	3.90	915	3.90	0
0.68	2.73	3.04	3.10	12.50	13.91	95	A++	8.04	8.70	379	A+	4.32	6.46	2090	4.96	1.50	A+++	5.88	4.10	976	4.10	0
0.69	2.68	2.80	3.14	12.27	12.81	95	A++	8.05	9.00	392	A+	4.35	6.46	2076	4.97	1.49	A+++	5.84	4.20	1007	4.20	0
0.76	2.72	2.79	3.48	12.45	12.77	95	A++	8.06	9.00	391	A+	4.38	6.46	2062	4.99	1.47	A+++	5.79	4.20	1014	4.20	0
0.70	2.73	2.97	3.18	12.50	13.59	95	A++	8.06	8.70	378	A+	4.28	6.46	2113	4.95	1.51	A+++	5.97	4.00	938	4.00	0
0.72	2.71	3.04	3.31	12.41	13.91	95	A++	8.03	9.00	392	A+	4.34	6.46	2084	4.96	1.50	A+++	5.88	4.10	976	4.10	0
0.73	2.60	2.80	3.36	11.90	12.81	95	A++	8.05	9.00	392	A+	4.37	6.46	2069	4.98	1.48	A+++	5.84	4.20	1007	4.20	0
0.78	2.55	2.78	3.57	11.68	12.72	95	A++	8.06	9.00	391	A+	4.40	6.46	2055	5.00	1.46	A+++	5.80	4.30	1038	4.30	0
0.75	2.59	2.83	3.44	11.86	12.95	95	A++	8.09	9.00	390	A+	4.35	6.46	2077	4.96	1.50	A+++	5.88	4.10	975	4.10	0
0.74	2.55	2.75	3.40	11.68	12.59	95	A++	8.10	9.00	389	A+	4.38	6.46	2063	4.98	1.48	A+++	5.84	4.20	1006	4.20	0
0.81	2.53	2.73	3.70	11.58	12.49	95	A++	8.11	9.00	388	A+	4.41	6.46	2049	5.00	1.46	A+++	5.80	4.30	1038	4.30	0
0.77	2.44	2.67	3.53	11.17	12.22	95	A++	8.11	9.00	389	A+	4.39	6.46	2057	4.99	1.47	A+++	5.85	4.20	1006	4.20	0
0.82	2.39	2.66	3.74	10.94	12.17	95	A++	8.12	9.00	388	A+	4.42	6.46	2043	5.00	1.46	A+++	5.80	4.30	1037	4.30	0
0.56	2.67	2.66	2.58	12.22	12.17	95	A++	8.28	7.50	317	A+	4.09	5.00	1709	4.13	0.87	A+++	5.77	3.70	898	3.70	0
0.63	2.63	2.74	2.88	12.04	12.54	95	A++	8.13	8.00	345	A+	4.11	5.60	1906	4.48	1.12	A+++	5.79	3.70	894	3.70	0
0.65	2.61	2.87	2.97	11.95	13.14	95	A++	8.14	8.00	344	A+	4.12	5.60	1900	4.48	1.12	A+++	5.78	3.80	921	3.80	0
0.66	2.51	3.04	3.01	11.49	13.91	95	A++	8.07	8.50	369	A+	4.20	6.46	2152	4.97	1.49	A+++	5.75	3.90	949	3.90	0
0.67	2.46	2.80	3.05	11.26	12.81	95	A++	8.05	9.00	391	A+	4.23	6.46	2136	4.99	1.47	A+++	5.71	4.00	980	4.00	0
0.73	2.41	2.79	3.36	11.03	12.77	95	A++	8.07	9.00	391	A+	4.26	6.46	2121	5.00	1.46	A+++	5.67	4.10	1012	4.10	0
0.68	2.57	2.80	3.18	11.68	14.10	95	A++	8.14	8.00	344	A+	4.15	6.46	2176	4.96	1.50	A+++	5.85	3.80	909	3.80	0
0.70	2.55	2.80	3.08	11.68	14.10	95	A++	8.09	8.50	368	A+	4.16	6.46	2170	4.96	1.50	A+++	5.84	3.80	910	3.80	0
0.71	2.45	3.04	3.23	11.22	13.91	95	A++	8.05	9.00	392	A+	4.22	6.46	2139	4.97	1.49	A+++	5.76	3.90	948	3.90	0
0.71	2.40	2.80	3.27	10.99	12.81	95	A++	8.06	9.00	391	A+	4.25	6.46	2124	4.99	1.47	A+++	5.72	4.00	979	4.00	0
0.78	2.36	2.79	3.57	10.81	12.77	95	A++	8.07	9.00	390	A+	4.28	6.46	2110	5.01	1.45	A+++	5.67	4.10	1011	4.10	0
0.72	2.53	3.08	3.31	11.58	14.10	95	A++	8.01	9.00	394	A+	4.18	6.46	2163	4.96	1.50	A+++	5.85	3.80	910	3.80	0
0.75	2.43	3.04	3.44	11.13	13.91	95	A++	7.99	9.00	394	A+	4.24	6.46	2133	4.97	1.49	A+++	5.76	4.00	972	4.00	0
0.76	2.39	2.80	3.48	10.94	12.81	95	A++	8.01	9.00	394	A+	4.27	6.46	2118	4.99	1.47	A+++	5.72	4.00	979	4.00	0
0.81	2.34	2.78	3.70	10.71	12.72	95	A++	8.02	9.00	393	A+	4.30	6.46	2103	5.01	1.45	A+++	5.68	4.10	1011	4.10	0
0.78	2.41	2.83	3.57	11.03	12.95	95	A++	8.10	9.00	389	A+	4.25	6.46	2126	4.98	1.48	A+++	5.76	4.00	972	4.00	0
0.79	2.37	2.75	3.61	10.85	12.59	95	A++	8.11														

Combination tables

Indoor unit	Cooling capacity [kW]					Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]					Total heating capacity [kW]		
	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.
4.2+4.2+5.0	2.82	2.82	3.36	---	---	3.50	9.00	9.35	0.60	2.57	2.77	2.80	11.80	12.80	3.13	3.13	3.73	---	---	4.47	10.00	11.25
4.2+4.2+6.0	2.63	2.63	3.75	---	---	3.50	9.00	9.58	0.60	2.56	2.90	2.80	11.80	13.40	2.92	2.92	4.17	---	---	4.75	10.00	11.27
4.2+4.2+7.1	2.44	2.44	4.12	---	---	3.67	9.00	10.06	0.64	2.56	3.24	3.00	11.80	14.90	2.71	2.71	4.58	---	---	5.07	10.00	11.30
4.2+5.0+5.0	2.66	3.17	3.17	---	---	3.53	9.00	9.23	0.60	2.47	2.60	2.80	11.40	11.90	2.96	3.52	3.52	---	---	4.70	10.00	11.07
4.2+5.0+6.0	2.49	2.96	3.55	---	---	3.71	9.00	10.24	0.64	2.47	3.25	3.00	11.30	15.00	2.76	3.29	3.95	---	---	4.99	10.00	11.30
5.0+5.0+5.0	3.00	3.00	3.00	---	---	3.73	9.00	10.00	0.64	2.41	3.00	3.00	11.10	13.80	3.33	3.33	3.33	---	---	4.93	10.00	11.20
1.5+1.5+1.5+1.5	1.65	1.65	1.65	1.65	---	2.31	6.60	7.10	0.44	1.35	1.55	2.02	6.20	7.10	1.83	1.83	1.83	1.83	---	2.33	7.30	10.12
1.5+1.5+1.5+2.0	1.55	1.55	1.55	2.06	---	2.36	6.70	7.30	0.47	1.43	1.66	2.15	6.53	7.58	1.85	1.85	1.85	2.46	---	2.48	8.00	10.30
1.5+1.5+1.5+2.5	1.50	1.50	1.50	2.50	---	2.42	7.00	7.50	0.47	1.53	1.74	2.15	7.00	7.98	1.82	1.82	1.82	3.04	---	2.63	8.50	10.41
1.5+1.5+1.5+3.5	1.41	1.41	1.41	3.28	---	2.55	7.50	8.18	0.50	1.74	2.02	2.27	8.00	9.30	1.74	1.74	1.74	4.07	---	2.92	9.30	10.60
1.5+1.5+1.5+4.2	1.38	1.38	1.38	3.86	---	2.66	8.00	8.55	0.50	1.95	2.19	2.27	9.00	10.10	1.72	1.72	1.72	4.83	---	3.12	10.00	11.17
1.5+1.5+1.5+5.0	1.26	1.26	1.26	4.21	---	2.77	8.00	9.03	0.53	1.90	2.37	2.44	8.80	10.90	1.58	1.58	1.58	5.26	---	3.35	10.00	11.29
1.5+1.5+1.5+6.0	1.24	1.24	1.24	4.97	---	2.92	8.70	9.50	0.53	2.23	2.62	2.44	10.20	12.10	1.43	1.43	1.43	5.71	---	3.63	10.00	11.53
1.5+1.5+1.5+7.1	1.16	1.16	1.16	5.51	---	3.08	9.00	9.95	0.56	2.36	2.88	2.57	10.90	13.20	1.29	1.29	1.29	6.12	---	3.95	10.00	11.56
1.5+1.5+2.0+2.0	1.50	1.50	2.00	2.00	---	2.42	7.00	7.50	0.47	1.53	1.74	2.15	7.00	8.10	1.82	1.82	1.82	2.43	---	2.63	8.50	10.49
1.5+1.5+2.0+2.5	1.50	1.50	2.00	2.50	---	2.48	7.50	7.90	0.47	1.74	1.91	2.15	8.00	8.80	1.80	1.80	1.80	3.00	---	2.77	9.00	10.59
1.5+1.5+2.0+3.5	1.41	1.41	1.88	3.29	---	2.63	8.00	8.42	0.50	1.95	2.13	2.27	9.00	9.80	1.76	1.76	2.35	4.12	---	3.06	10.00	10.69
1.5+1.5+2.0+4.2	1.30	1.30	1.74	3.65	---	2.73	8.00	8.90	0.53	1.95	2.36	2.44	9.00	10.90	1.63	1.63	2.17	4.57	---	3.26	10.00	11.17
1.5+1.5+2.0+5.0	1.28	1.28	1.70	4.25	---	2.85	8.50	9.26	0.53	2.13	2.50	2.44	9.80	11.50	1.50	1.50	2.00	5.00	---	3.49	10.00	11.29
1.5+1.5+2.0+6.0	1.23	1.23	1.64	4.91	---	2.99	9.00	9.72	0.56	2.36	2.75	2.57	10.90	12.60	1.36	1.36	1.82	5.45	---	3.77	10.00	11.53
1.5+1.5+2.0+7.1	1.12	1.12	1.49	5.28	---	3.16	9.00	10.05	0.60	2.36	2.95	2.74	10.90	13.60	1.24	1.24	1.65	5.87	---	4.09	10.00	11.56
1.5+1.5+2.5+2.5	1.41	1.41	2.34	2.34	---	2.55	7.50	8.16	0.50	1.74	2.02	2.27	8.00	9.30	1.88	1.88	3.13	3.13	---	2.92	10.00	10.59
1.5+1.5+2.5+3.5	1.33	1.33	2.22	3.11	---	2.70	8.00	8.79	0.53	1.95	2.31	2.44	9.00	10.60	1.67	1.67	2.78	3.89	---	3.20	10.00	11.16
1.5+1.5+2.5+4.2	1.31	1.31	2.19	3.68	---	2.80	8.50	9.14	0.53	2.17	2.49	2.44	10.00	11.40	1.55	1.55	2.58	4.33	---	3.41	10.00	11.17
1.5+1.5+2.5+5.0	1.24	1.24	2.07	4.14	---	2.92	8.70	9.49	0.56	2.23	2.62	2.57	10.30	12.10	1.43	1.43	2.38	4.76	---	3.63	10.00	11.29
1.5+1.5+2.5+6.0	1.17	1.17	1.96	4.70	---	3.07	9.00	9.84	0.56	2.36	2.81	2.57	10.90	13.00	1.30	1.30	2.17	5.22	---	3.92	10.00	11.53
1.5+1.5+2.5+7.1	1.07	1.07	1.79	5.07	---	3.23	9.00	10.16	0.60	2.36	3.01	2.74	10.80	13.90	1.19	1.19	1.98	5.63	---	4.23	10.00	11.56
1.5+1.5+3.5+3.5	1.28	1.28	2.98	2.98	---	2.85	8.50	9.27	0.53	2.17	2.55	2.44	10.00	11.70	1.50	1.50	3.50	3.50	---	3.49	10.00	11.17
1.5+1.5+3.5+4.2	1.26	1.26	2.94	3.53	---	2.95	9.00	9.39	0.56	2.41	2.61	2.57	11.10	12.00	1.40	1.40	3.27	3.93	---	3.69	10.00	11.17
1.5+1.5+3.5+5.0	1.17	1.17	2.74	3.91	---	3.07	9.00	9.74	0.59	2.36	2.75	2.69	10.80	12.70	1.30	1.30	3.04	4.35	---	3.92	10.00	11.30
1.5+1.5+3.5+6.0	1.08	1.08	2.52	4.32	---	3.21	9.00	10.18	0.59	2.36	3.02	2.69	10.80	13.90	1.20	1.20	2.80	4.80	---	4.21	10.00	11.54
1.5+1.5+3.5+7.1	0.99	0.99	2.32	4.70	---	3.42	9.00	10.20	0.56	2.35	3.02	2.70	10.80	13.90	1.10	1.10	2.57	5.22	---	4.53	10.00	11.58
1.5+1.5+4.2+4.2	1.18	1.18	3.32	3.32	---	3.05	9.00	9.61	0.59	2.41	2.74	2.69	11.10	12.60	1.32	1.32	3.68	3.68	---	3.90	10.00	11.18
1.5+1.5+4.2+5.0	1.11	1.11	3.10	3.69	---	3.17	9.00	9.75	0.59	2.36	2.75	2.69	10.80	12.70	1.23	1.23	3.44	4.10	---	4.12	10.00	11.32
1.5+1.5+4.2+6.0	1.02	1.02	2.86	4.09	---	3.41	9.00	10.19	0.56	2.35	3.02	2.70	10.80	13.90	1.14	1.14	3.18	4.55	---	4.41	10.00	11.55
1.5+1.5+4.2+7.1	0.94	0.94	2.64	4.47	---	3.60	9.00	10.20	0.60	2.35	3.02	2.80	10.80	13.90	1.05	1.05	2.94	4.97	---	4.72	10.00	11.59
1.5+1.5+5.0+5.0	1.04	1.04	3.46	3.46	---	3.43	9.00	9.97	0.56	2.31	2.83	2.70	10.60	13.00	1.15	1.15	3.85	3.85	---	4.36	10.00	11.45
1.5+1.5+5.0+6.0	0.96	0.96	3.21	3.86	---	3.44	9.00	10.42	0.56	2.31	3.10	2.70	10.60	14.20	1.07	1.07	3.57	4.29	---	4.64	10.00	11.68
1.5+1.5+5.0+7.1	0.89	0.89	2.98	4.23	---	3.62	9.00	10.73	0.60	2.30	3.30	2.80	10.60	15.20	0.99	0.99	3.31	4.70	---	4.96	10.00	11.72
1.5+1.5+6.0+6.0	0.90	0.90	3.60	3.60	---	3.62	9.00	10.74	0.60	2.30	3.31	2.80	10.60	15.20	1.00	1.00	4.00	4.00	---	4.93	10.00	11.92
1.5+2.0+2.0+2.0	1.50	2.00	2.00	2.00	---	2.48	7.50	7.89	0.47	1.74	1.91	2.15	8.00	8.80	1.90	1.90	2.53	2.53	---	2.77	9.50	10.68
1.5+2.0+2.0+2.5	1.41	1.88	1.88	2.34	---	2.55	7.50	8.15	0.50	1.74	2.02	2.27	8.00	9.30	1.88	1.88	2.50	2.50	---	3.13	10.00	10.77
1.5+2.0+2.0+3.5	1.33	1.78	1.78	3.11	---	2.70	8.00	8.78	0.53	1.95	2.30	2.44	9.00	10.60	1.67	1.67	2.22	2.22	---	3.20	10.00	11.16
1.5+2.0+2.0+4.2	1.31	1.75	1.75	3.68	---	2.80	8.50	9.12	0.53	2.18	2.49	2.44	10.00	11.40	1.55	1.55	2.06	2.06	---	3.41	10.00	11.17
1.5+2.0+2.0+5.0	1.24	1.66	1.66	4.14	---	2.92	8.70	9.48	0.56	2.23	2.62	2.57	10.30	12.00	1.43	1.43	1.90	4.76	---	3.63	10.00	11.29
1.5+2.0+2.0+6.0	1.17	1.57	1.57	4.70	---	3.07	9.00	9.94	0.56	2.36	2.88	2.57	10.90	13.20	1.30	1.30	1.74	5.22	---	3.92	10.00	11.53
1.5+2.0+2.0+7.1	1.07	1.43	1.43	5.07	---	3.23	9.00	10.26	0.60	2.36	3.08	2.74	10.90	14.20	1.19	1.19	1.59	5.63	---	4.23	10.00	11.56
1.5+2.0+2.5+2.5	1.41	1.88	2.35																			

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)						Seasonal data heating (warm climate)					
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.86	2.49	2.87	3.91	11.40	13.14	95	A++	7.99	9.00	395	A+	4.38	6.46	2063	5.00	1.46	A+++	5.84	4.20	1006	4.20	0
0.86	2.44	2.79	3.96	11.17	12.77	95	A++	8.00	9.00	394	A+	4.41	6.46	2049	5.02	1.44	A+++	5.80	4.30	1038	4.30	0
0.92	2.39	2.78	4.22	10.94	12.72	95	A++	8.01	9.00	394	A+	4.44	6.46	2036	5.04	1.42	A+++	5.76	4.30	1045	4.30	0
0.86	2.47	2.82	3.91	11.31	12.91	95	A++	7.99	9.00	394	A+	4.39	6.46	2057	5.01	1.45	A+++	5.85	4.20	1006	4.20	0
0.87	2.42	2.74	4.00	11.08	12.54	95	A++	8.00	9.00	394	A+	4.42	6.46	2043	5.03	1.43	A+++	5.80	4.30	1037	4.30	0
0.89	2.45	2.78	4.09	11.22	12.72	95	A++	8.00	9.00	394	A+	4.41	6.46	2051	5.01	1.45	A+++	5.85	4.30	1029	4.30	0
0.43	1.71	2.14	1.98	7.83	9.79	95	A++	8.33	6.00	252	A+	4.01	6.46	2252	4.97	1.49	A+++	5.78	3.40	824	3.40	0
0.45	1.93	2.24	2.06	8.84	10.25	95	A++	8.44	6.50	270	A+	4.03	6.46	2242	4.97	1.49	A+++	5.77	3.50	849	3.50	0
0.47	2.07	2.24	2.15	9.48	10.25	95	A+++	8.57	7.00	286	A+	4.05	6.46	2233	4.97	1.49	A+++	5.77	3.50	849	3.50	0
0.51	2.32	2.53	2.32	10.62	11.58	95	A+++	8.58	7.50	306	A+	4.08	6.46	2214	4.98	1.48	A+++	5.76	3.50	850	3.50	0
0.55	2.60	2.79	2.54	11.90	12.77	95	A++	8.38	8.00	335	A+	4.08	6.46	2216	4.99	1.47	A+++	5.76	3.60	875	3.60	0
0.55	2.50	2.74	2.54	11.45	12.54	95	A++	8.37	8.00	335	A+	4.15	6.46	2179	5.00	1.46	A+++	5.70	3.70	909	3.70	0
0.56	2.45	2.67	2.58	11.22	12.22	95	A++	8.15	8.70	374	A+	4.18	6.46	2161	5.00	1.46	A+++	5.67	3.80	939	3.80	0
0.62	2.40	2.65	2.84	10.99	12.13	95	A++	8.20	9.00	385	A+	4.21	6.46	2145	5.00	1.46	A+++	5.63	3.90	969	3.90	0
0.47	2.04	2.28	2.15	9.34	10.43	95	A+++	8.57	7.00	286	A+	4.13	6.46	2187	4.97	1.49	A+++	5.83	3.50	840	3.50	0
0.49	2.19	2.54	2.24	10.03	11.62	95	A+++	8.57	7.50	307	A+	4.15	6.46	2178	4.98	1.48	A+++	5.83	3.50	840	3.50	0
0.55	2.52	2.53	2.54	11.54	11.58	95	A++	8.38	8.00	335	A+	4.18	6.46	2160	4.99	1.47	A+++	5.82	3.50	841	3.50	0
0.57	2.50	2.79	2.62	11.45	12.77	95	A++	8.38	8.00	334	A+	4.18	6.46	2163	4.99	1.47	A+++	5.82	3.60	866	3.60	0
0.60	2.40	2.74	2.75	10.99	12.54	95	A++	8.20	8.50	363	A+	4.25	6.46	2128	5.00	1.46	A+++	5.76	3.70	899	3.70	0
0.58	2.35	2.67	2.67	10.76	12.22	95	A++	8.20	9.00	385	A+	4.28	6.46	2112	5.00	1.46	A+++	5.72	3.80	929	3.80	0
0.65	2.31	2.65	2.97	10.58	12.13	95	A++	8.21	9.00	384	A+	4.31	6.46	2096	5.01	1.45	A+++	5.69	3.90	959	3.90	0
0.54	2.54	2.54	2.45	11.63	11.62	95	A+++	8.57	7.50	307	A+	4.17	6.46	2168	4.98	1.48	A+++	5.84	3.50	838	3.50	0
0.57	2.50	2.80	2.62	11.45	12.81	95	A++	8.39	8.00	334	A+	4.18	6.46	2162	4.99	1.47	A+++	5.83	3.60	864	3.60	0
0.59	2.48	2.79	2.71	11.36	12.77	95	A++	8.18	8.50	364	A+	4.19	6.46	2154	4.99	1.47	A+++	5.83	3.60	864	3.60	0
0.62	2.38	2.74	2.84	10.90	12.54	95	A++	8.16	8.70	373	A+	4.26	6.46	2120	5.00	1.46	A+++	5.77	3.70	898	3.70	0
0.63	2.34	2.67	2.88	10.71	12.22	95	A++	8.15	9.00	387	A+	4.30	6.46	2104	5.01	1.45	A+++	5.74	3.80	927	3.80	0
0.67	2.29	2.65	3.05	10.49	12.13	95	A++	8.17	9.00	386	A+	4.33	6.46	2088	5.01	1.45	A+++	5.70	3.90	957	3.90	0
0.62	2.48	2.79	2.84	11.36	12.77	95	A++	8.18	8.50	364	A+	4.20	6.46	2154	4.99	1.47	A+++	5.84	3.60	862	3.60	0
0.64	2.46	2.79	2.93	11.26	12.77	95	A++	8.13	9.00	388	A+	4.21	6.46	2146	5.00	1.46	A+++	5.84	3.60	862	3.60	0
0.67	2.36	2.74	3.05	10.81	12.54	95	A++	8.13	9.00	388	A+	4.28	6.46	2112	5.01	1.45	A+++	5.78	3.80	920	3.80	0
0.68	2.32	2.66	3.10	10.62	12.17	95	A++	8.15	9.00	387	A+	4.31	6.46	2096	5.01	1.45	A+++	5.75	3.80	925	3.80	0
0.74	2.28	2.65	3.40	10.44	12.13	95	A++	8.16	9.00	386	A+	4.34	6.46	2080	5.02	1.44	A+++	5.71	3.90	955	3.90	0
0.69	2.44	2.79	3.14	11.17	12.77	95	A++	8.14	9.00	387	A+	4.23	6.46	2137	5.00	1.46	A+++	5.85	3.70	885	3.70	0
0.71	2.34	2.74	3.27	10.71	12.54	95	A++	8.14	9.00	387	A+	4.30	6.46	2103	5.01	1.45	A+++	5.79	3.80	918	3.80	0
0.72	2.30	2.66	3.31	10.53	12.17	95	A++	8.15	9.00	387	A+	4.33	6.46	2088	5.02	1.44	A+++	5.76	3.90	948	3.90	0
0.76	2.26	2.65	3.48	10.35	12.13	95	A++	8.17	9.00	386	A+	4.36	6.46	2072	5.02	1.44	A+++	5.72	3.90	953	3.90	0
0.71	2.33	2.70	3.27	10.67	12.36	95	A++	8.19	9.00	385	A+	4.31	6.46	2095	5.02	1.44	A+++	5.80	3.80	916	3.80	0
0.72	2.28	2.67	3.31	10.44	12.22	95	A++	8.20	9.00	384	A+	4.34	6.46	2080	5.02	1.44	A+++	5.77	3.90	946	3.90	0
0.79	2.24	2.65	3.61	10.26	12.13	95	A++	8.21	9.00	384	A+	4.38	6.46	2065	5.02	1.44	A+++	5.73	4.00	976	4.00	0
0.75	2.27	2.59	3.44	10.39	11.85	95	A++	8.21	9.00	384	A+	4.36	6.46	2072	5.02	1.44	A+++	5.78	3.90	944	3.90	0
0.49	2.31	2.54	2.24	10.58	11.62	95	A+++	8.57	7.50	307	A+	4.15	6.46	2176	4.98	1.48	A+++	5.85	3.50	837	3.50	0
0.54	2.42	2.54	2.45	11.08	11.62	95	A++	8.44	7.50	311	A+	4.17	6.46	2167	4.99	1.47	A+++	5.85	3.50	838	3.50	0
0.57	2.40	2.80	2.62	10.99	12.81	95	A++	8.39	8.00	334	A+	4.18	6.46	2161	4.99	1.47	A+++	5.84	3.60	863	3.60	0
0.59	2.38	2.79	2.71	10.90	12.77	95	A++	8.18	8.50	364	A+	4.20	6.46	2153	5.00	1.46	A+++	5.84	3.60	864	3.60	0
0.62	2.35	2.74	2.84	10.76	12.54	95	A++	8.15	8.70	374	A+	4.26	6.46	2119	5.01	1.45	A+++	5.77	3.70	897	3.70	0
0.63	2.31	2.67	2.88	10.58	12.22	95	A++	8.15	9.00	387	A+	4.30	6.46	2103	5.01	1.45	A+++	5.74	3.80	927	3.80	0
0.67	2.29	2.65	3.05	10.49	12.13	95	A++	8.17	9.00	386	A+	4.33	6.46	2087	5.02	1.44	A+++	5.71	3.90	957	3.90	0
0.55	2.51	2.54	2.54	11.49	11.62	95	A++	8.35	8.00	336	A+	4.19	6.46	2158	4.99	1.47	A+++	5.86	3.50	836	3.50	0
0.59	2.47	2.80	2.71	11.31	12.81	95	A++	8.37	8.00	335	A+	4.20	6.46	2153	5.00	1.46	A+++	5.85	3.60	861	3.60	0
0.62	2.45	2.79	2.84	11.22	12.77	95	A++	8.17	8.50	364	A+	4.21	6.46	2145	5.00	1.46	A+++	5.85	3.60	862	3.60	0
0.64	2.36	2.74	2.93	10.81	12.54	95	A++	8.14	9.00	387	A+	4.28	6.46	2111	5.01	1.45	A+++	5.78	3.80	919	3.80	0
0.65	2.31	2.67	2.97	10.58	12.22	95	A++	8.16	9.00	386	A+	4.31	6.46	2095	5.02	1.44	A+++	5.75	3.80	925	3.80	0
0.70	2.27	2.65	3.18	10.39	12.13	95	A++	8.1														

Combination tables

Indoor unit	Cooling capacity [kW]					Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]					Total heating capacity [kW]		
	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.
1.5+2.5+2.5+6.0	1.08	1.80	1.80	4.32	---	3.21	9.00	10.16	0.59	2.36	3.01	2.69	10.80	13.90	1.20	2.00	2.00	4.80	---	4.21	10.00	11.53
1.5+2.5+2.5+7.1	0.99	1.65	1.65	4.70	---	3.41	9.00	10.18	0.56	2.36	3.01	2.70	10.80	13.90	1.10	1.84	1.84	5.22	---	4.53	10.00	11.56
1.5+2.5+3.5+3.5	1.23	2.05	2.86	2.86	---	2.99	9.00	9.39	0.56	2.41	2.61	2.57	11.10	12.00	1.36	2.27	3.18	3.18	---	3.77	10.00	11.17
1.5+2.5+3.5+4.2	1.15	1.92	2.69	3.23	---	3.10	9.00	9.51	0.59	2.41	2.68	2.69	11.10	12.30	1.28	2.14	2.99	3.59	---	3.98	10.00	11.17
1.5+2.5+3.5+5.0	1.08	1.80	2.52	3.60	---	3.21	9.00	9.75	0.59	2.36	2.75	2.69	10.80	12.70	1.20	2.00	2.80	4.00	---	4.21	10.00	11.30
1.5+2.5+3.5+6.0	1.00	1.67	2.33	4.00	---	3.41	9.00	10.19	0.56	2.35	3.02	2.70	10.80	13.90	1.11	1.85	2.59	4.44	---	4.50	10.00	11.54
1.5+2.5+3.5+7.1	0.92	1.54	2.16	4.38	---	3.60	9.00	10.21	0.60	2.35	3.02	2.80	10.80	13.90	1.03	1.71	2.40	4.86	---	4.81	10.00	11.58
1.5+2.5+4.2+4.2	1.09	1.81	3.05	3.05	---	3.20	9.00	9.62	0.59	2.41	2.74	2.69	11.10	12.60	1.21	2.02	3.39	3.39	---	4.18	10.00	11.18
1.5+2.5+4.2+5.0	1.02	1.70	2.86	3.41	---	3.41	9.00	9.76	0.56	2.36	2.75	2.70	10.80	12.70	1.14	1.89	3.18	3.79	---	4.41	10.00	11.32
1.5+2.5+4.2+6.0	0.95	1.58	2.66	3.80	---	3.60	9.00	10.20	0.60	2.35	3.02	2.80	10.80	13.90	1.06	1.76	2.96	4.23	---	4.70	10.00	11.55
1.5+2.5+4.2+7.1	0.88	1.47	2.47	4.18	---	3.78	9.00	10.71	0.63	2.35	3.36	3.00	10.80	15.50	0.98	1.63	2.75	4.64	---	5.02	10.00	11.59
1.5+2.5+5.0+5.0	0.96	1.61	3.21	3.21	---	3.20	9.00	9.53	0.59	2.31	2.57	2.69	10.60	11.80	1.07	1.79	3.57	3.57	---	4.18	10.00	11.46
1.5+2.5+5.0+6.0	0.90	1.50	3.00	3.60	---	3.44	9.00	9.78	0.56	2.30	2.70	2.70	10.60	12.40	1.00	1.67	3.33	4.00	---	4.41	10.00	11.48
1.5+3.5+3.5+3.5	1.13	2.63	2.63	2.63	---	3.14	9.00	9.53	0.59	2.41	2.68	2.69	11.10	12.30	1.25	2.92	2.92	2.92	---	4.07	10.00	11.17
1.5+3.5+3.5+4.2	1.06	2.48	2.48	2.98	---	3.39	9.00	9.54	0.56	2.40	2.68	2.70	11.10	12.30	1.18	2.76	2.76	3.31	---	4.26	10.00	11.18
1.5+3.5+3.5+5.0	1.00	2.33	2.33	3.33	---	3.42	9.00	9.78	0.56	2.35	2.75	2.70	10.80	12.70	1.11	2.59	2.59	3.70	---	4.50	10.00	11.32
1.5+3.5+3.5+6.0	0.93	2.17	2.17	3.72	---	3.60	9.00	10.22	0.60	2.35	3.02	2.80	10.80	13.90	1.03	2.41	2.41	4.14	---	4.78	10.00	11.55
1.5+3.5+3.5+7.1	0.87	2.02	2.02	4.10	---	3.78	9.00	10.73	0.63	2.32	3.37	3.00	10.70	15.50	0.96	2.24	2.24	4.55	---	5.10	10.00	11.59
1.5+3.5+4.2+4.2	1.01	2.35	2.82	2.82	---	3.39	9.00	9.55	0.56	2.40	2.68	2.70	11.10	12.30	1.12	2.61	3.13	3.13	---	4.47	10.00	11.19
1.5+3.5+4.2+5.0	0.95	2.22	2.66	3.17	---	3.60	9.00	9.79	0.60	2.35	2.75	2.80	10.80	12.70	1.06	2.46	2.96	3.52	---	4.70	10.00	11.33
1.5+3.5+4.2+6.0	0.89	2.07	2.49	3.55	---	3.78	9.00	10.73	0.63	2.32	3.37	3.00	10.70	15.50	0.99	2.30	2.76	3.95	---	4.99	10.00	11.56
1.5+3.5+5.0+5.0	0.90	2.10	3.00	3.00	---	3.62	9.00	10.53	0.60	2.30	3.17	2.80	10.60	14.60	1.00	2.33	3.33	3.33	---	4.93	10.00	11.45
1.5+4.2+4.2+4.2	0.96	2.68	2.68	2.68	---	3.57	9.00	9.56	0.60	2.40	2.68	2.80	11.00	12.40	1.06	2.98	2.98	2.98	---	4.67	10.00	11.20
1.5+4.2+4.2+5.0	0.91	2.54	2.54	3.02	---	3.60	9.00	10.32	0.60	2.35	3.09	2.80	10.80	14.20	1.01	2.82	2.82	3.36	---	4.90	10.00	11.34
2.0+2.0+2.0+2.0	1.88	1.88	1.88	1.88	---	2.55	7.50	8.14	0.50	1.74	2.02	2.27	8.00	9.30	2.50	2.50	2.50	2.50	---	2.92	10.00	10.86
2.0+2.0+2.0+2.5	1.88	1.88	1.88	2.35	---	2.63	8.00	8.51	0.50	1.95	2.19	2.27	9.00	10.10	2.35	2.35	2.35	2.94	---	3.06	10.00	10.95
2.0+2.0+2.0+3.5	1.68	1.68	1.68	2.95	---	2.77	8.00	9.00	0.53	1.95	2.42	2.44	9.00	11.20	2.11	2.11	3.68	3.68	---	3.35	10.00	11.16
2.0+2.0+2.0+4.2	1.67	1.67	1.67	3.50	---	2.88	8.50	9.34	0.56	2.18	2.61	2.57	10.00	12.00	1.96	1.96	4.12	4.12	---	3.55	10.00	11.17
2.0+2.0+2.0+5.0	1.64	1.64	1.64	4.09	---	2.99	9.00	9.59	0.56	2.37	2.68	2.57	10.90	12.40	1.82	1.82	4.55	4.55	---	3.77	10.00	11.29
2.0+2.0+2.0+6.0	1.50	1.50	1.50	4.50	---	3.14	9.00	10.04	0.60	2.36	2.95	2.74	10.90	13.60	1.67	1.67	5.00	5.00	---	4.07	10.00	11.53
2.0+2.0+2.0+7.1	1.37	1.37	1.37	4.88	---	3.41	9.00	10.26	0.56	2.36	3.08	2.70	10.90	14.20	1.53	1.53	5.42	5.42	---	4.39	10.00	11.56
2.0+2.0+2.5+2.5	1.73	1.73	2.17	2.17	---	2.70	7.80	8.75	0.53	1.88	2.30	2.44	8.70	10.60	2.22	2.22	2.78	2.78	---	3.20	10.00	11.15
2.0+2.0+2.5+3.5	1.70	1.70	2.13	2.98	---	2.85	8.50	9.24	0.53	2.18	2.55	2.44	10.00	11.70	2.00	2.00	2.50	3.50	---	3.49	10.00	11.16
2.0+2.0+2.5+4.2	1.68	1.68	2.10	3.53	---	2.95	9.00	9.36	0.56	2.42	2.61	2.57	11.10	12.00	1.87	1.87	2.34	3.93	---	3.69	10.00	11.17
2.0+2.0+2.5+5.0	1.57	1.57	1.96	3.91	---	3.07	9.00	9.71	0.59	2.36	2.75	2.69	10.90	12.60	1.74	1.74	4.35	4.35	---	3.92	10.00	11.29
2.0+2.0+2.5+6.0	1.44	1.44	1.80	4.32	---	3.21	9.00	10.15	0.60	2.36	3.01	2.74	10.90	13.90	1.60	1.60	2.00	4.80	---	4.21	10.00	11.53
2.0+2.0+2.5+7.1	1.32	1.32	1.65	4.70	---	3.41	9.00	10.16	0.56	2.36	3.01	2.70	10.80	13.90	1.47	1.47	1.84	5.22	---	4.53	10.00	11.56
2.0+2.0+3.5+3.5	1.64	1.64	2.86	2.86	---	2.99	9.00	9.38	0.56	2.41	2.61	2.57	11.10	12.00	1.82	1.82	3.18	3.18	---	3.77	10.00	11.17
2.0+2.0+3.5+4.2	1.54	1.54	2.69	3.23	---	3.10	9.00	9.60	0.59	2.41	2.74	2.69	11.10	12.60	1.71	1.71	2.99	3.59	---	3.98	10.00	11.17
2.0+2.0+3.5+5.0	1.44	1.44	2.52	3.60	---	3.21	9.00	9.74	0.59	2.36	2.75	2.69	10.80	12.70	1.60	1.60	2.80	4.00	---	4.21	10.00	11.30
2.0+2.0+3.5+6.0	1.33	1.33	2.33	4.00	---	3.41	9.00	10.18	0.56	2.36	3.02	2.70	10.80	13.90	1.48	1.48	2.59	4.44	---	4.50	10.00	11.54
2.0+2.0+3.5+7.1	1.23	1.23	2.16	4.38	---	3.59	9.00	10.20	0.60	2.35	3.02	2.80	10.80	13.90	1.37	1.37	2.40	4.86	---	4.81	10.00	11.58
2.0+2.0+4.2+4.2	1.45	1.45	3.05	3.05	---	3.20	9.00	9.61	0.59	2.41	2.74	2.69	11.10	12.60	1.61	1.61	3.39	3.39	---	4.18	10.00	11.18
2.0+2.0+4.2+5.0	1.36	1.36	2.86	3.41	---	3.41	9.00	9.75	0.56	2.36	2.75	2.70	10.80	12.70	1.52	1.52	3.18	3.79	---	4.41	10.00	11.32
2.0+2.0+4.2+6.0	1.27	1.27	2.66	3.80	---	3.59	9.00	10.19	0.60	2.35	3.02	2.80	10.80	13.90	1.41	1.41	2.96	4.23	---	4.70	10.00	11.55
2.0+2.0+4.2+7.1	1.18	1.18	2.47	4.18	---	3.77	9.00	10.69	0.63	2.35	3.36	3.00	10.80	15.50	1.31	1.31	2.75	4.64	---	5.02	10.00	11.59
2.0+2.0+5.0+5.0	1.29	1.29	3.21	3.21	---	3.43	9.00	9.97	0.56	2.31	2.83	2.70	10.60	13.00	1.43	1.43</						

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)						Seasonal data heating (warm climate)					
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.68	2.30	2.67	3.10	10.53	12.22	95	A++	8.16	9.00	386	A+	4.33	6.46	2085	5.03	1.43	A+++	5.74	3.90	950	3.90	0
0.74	2.25	2.65	3.40	10.30	12.13	95	A++	8.18	9.00	386	A+	4.36	6.46	2070	5.03	1.43	A+++	5.71	3.90	956	3.90	0
0.67	2.43	2.79	3.05	11.13	12.77	95	A++	8.22	9.00	384	A+	4.23	6.46	2134	5.02	1.44	A+++	5.86	3.70	884	3.70	0
0.71	2.41	2.79	3.27	11.03	12.77	95	A++	8.22	9.00	383	A+	4.25	6.46	2127	5.02	1.44	A+++	5.85	3.70	885	3.70	0
0.71	2.32	2.74	3.27	10.62	12.54	95	A++	8.22	9.00	384	A+	4.32	6.46	2093	5.03	1.43	A+++	5.79	3.80	918	3.80	0
0.72	2.28	2.66	3.31	10.44	12.17	95	A++	8.23	9.00	383	A+	4.35	6.46	2078	5.03	1.43	A+++	5.76	3.90	948	3.90	0
0.79	2.24	2.65	3.61	10.26	12.13	95	A++	8.25	9.00	382	A+	4.38	6.46	2062	5.04	1.42	A+++	5.72	4.00	978	4.00	0
0.73	2.40	2.79	3.36	10.99	12.77	95	A++	8.23	9.00	383	A+	4.27	6.46	2118	5.02	1.44	A+++	5.86	3.70	883	3.70	0
0.76	2.31	2.74	3.48	10.58	12.54	95	A++	8.22	9.00	383	A+	4.33	6.46	2085	5.03	1.43	A+++	5.80	3.90	941	3.90	0
0.77	2.26	2.66	3.53	10.35	12.17	95	A++	8.24	9.00	383	A+	4.37	6.46	2070	5.04	1.42	A+++	5.77	3.90	946	3.90	0
0.85	2.22	2.65	3.87	10.17	12.13	95	A++	8.25	9.00	382	A+	4.40	6.46	2055	5.04	1.42	A+++	5.73	4.00	976	4.00	0
0.73	2.29	2.79	3.36	10.49	12.77	95	A++	8.23	9.00	383	A+	4.35	6.46	2077	5.04	1.42	A+++	5.81	3.90	939	3.90	0
0.76	2.25	2.74	3.48	10.30	12.54	95	A++	8.24	9.00	382	A+	4.38	6.46	2062	5.04	1.42	A+++	5.78	4.00	969	4.00	0
0.71	2.43	2.79	3.27	11.13	12.77	95	A++	8.21	9.00	384	A+	4.24	6.46	2132	5.05	1.41	A+++	5.86	3.70	884	3.70	0
0.76	2.41	2.79	3.48	11.03	12.77	95	A++	8.22	9.00	384	A+	4.25	6.46	2124	5.05	1.41	A+++	5.86	3.70	884	3.70	0
0.79	2.32	2.74	3.61	10.62	12.54	95	A++	8.21	9.00	384	A+	4.32	6.46	2091	5.06	1.40	A+++	5.79	3.80	918	3.80	0
0.80	2.28	2.66	3.66	10.44	12.17	95	A++	8.23	9.00	383	A+	4.35	6.46	2075	5.07	1.39	A+++	5.76	3.90	948	3.90	0
0.85	2.24	2.65	3.87	10.26	12.13	95	A++	8.24	9.00	383	A+	4.39	6.46	2060	5.07	1.39	A+++	5.72	4.00	978	4.00	0
0.78	2.40	2.78	3.57	10.99	12.72	95	A++	8.22	9.00	383	A+	4.27	6.46	2116	5.06	1.40	A+++	5.87	3.70	883	3.70	0
0.81	2.31	2.74	3.70	10.58	12.54	95	A++	8.22	9.00	384	A+	4.34	6.46	2083	5.07	1.39	A+++	5.80	3.90	941	3.90	0
0.82	2.26	2.66	3.74	10.35	12.17	95	A++	8.23	9.00	383	A+	4.37	6.46	2067	5.07	1.39	A+++	5.77	3.90	946	3.90	0
0.85	2.29	2.70	3.87	10.49	12.36	95	A++	8.22	9.00	383	A+	4.36	6.46	2075	5.07	1.39	A+++	5.82	3.90	939	3.90	0
0.84	2.38	2.78	3.83	10.90	12.72	95	A++	8.23	9.00	383	A+	4.29	6.46	2107	5.06	1.40	A+++	5.88	3.70	881	3.70	0
0.86	2.29	2.73	3.96	10.49	12.49	95	A++	8.22	9.00	383	A+	4.36	6.46	2075	5.07	1.39	A+++	5.82	3.90	939	3.90	0
0.54	2.53	2.54	2.45	11.58	11.62	95	A+++	8.58	7.50	306	A+	4.17	6.46	2166	4.99	1.47	A+++	5.87	3.50	835	3.50	0
0.55	2.51	2.54	2.54	11.49	11.62	95	A++	8.38	8.00	334	A+	4.19	6.46	2157	4.99	1.47	A+++	5.87	3.50	835	3.50	0
0.59	2.47	2.80	2.71	11.31	12.81	95	A++	8.38	8.00	335	A+	4.20	6.46	2152	5.00	1.46	A+++	5.85	3.60	861	3.60	0
0.62	2.45	2.79	2.84	11.22	12.77	95	A++	8.02	8.50	371	A+	4.21	6.46	2144	5.00	1.46	A+++	5.85	3.60	861	3.60	0
0.64	2.36	2.75	2.93	10.81	12.59	95	A++	7.93	9.00	398	A+	4.28	6.46	2110	5.02	1.44	A+++	5.79	3.80	919	3.80	0
0.65	2.31	2.67	2.97	10.58	12.22	95	A++	7.96	9.00	396	A+	4.32	6.46	2094	5.02	1.44	A+++	5.76	3.80	924	3.80	0
0.70	2.27	2.65	3.18	10.39	12.13	95	A++	7.96	9.00	396	A+	4.35	6.46	2078	5.02	1.44	A+++	5.72	3.90	954	3.90	0
0.57	2.49	2.80	2.62	11.40	12.81	95	A++	8.48	7.80	322	A+	4.19	6.46	2159	5.00	1.46	A+++	5.87	3.60	858	3.60	0
0.62	2.45	2.80	2.84	11.22	12.81	95	A++	8.02	8.50	371	A+	4.22	6.46	2143	5.00	1.46	A+++	5.87	3.60	859	3.60	0
0.64	2.43	2.79	2.93	11.13	12.77	95	A++	7.93	9.00	398	A+	4.23	6.46	2135	5.01	1.45	A+++	5.86	3.70	884	3.70	0
0.67	2.34	2.75	3.05	10.71	12.59	95	A++	7.93	9.00	397	A+	4.30	6.46	2102	5.02	1.44	A+++	5.80	3.80	917	3.80	0
0.68	2.30	2.67	3.10	10.53	12.22	95	A++	7.95	9.00	397	A+	4.33	6.46	2086	5.02	1.44	A+++	5.77	3.90	947	3.90	0
0.74	2.25	2.65	3.40	10.30	12.13	95	A++	7.97	9.00	396	A+	4.36	6.46	2070	5.03	1.43	A+++	5.73	3.90	952	3.90	0
0.67	2.43	2.79	3.05	11.13	12.77	95	A++	8.07	9.00	391	A+	4.23	6.46	2135	5.01	1.45	A+++	5.88	3.70	881	3.70	0
0.71	2.41	2.79	3.27	11.03	12.77	95	A++	8.07	9.00	391	A+	4.25	6.46	2127	5.01	1.45	A+++	5.87	3.70	882	3.70	0
0.71	2.32	2.74	3.27	10.62	12.54	95	A++	8.07	9.00	391	A+	4.32	6.46	2093	5.02	1.44	A+++	5.81	3.80	915	3.80	0
0.72	2.28	2.66	3.31	10.44	12.17	95	A++	8.08	9.00	390	A+	4.35	6.46	2078	5.03	1.43	A+++	5.78	3.90	945	3.90	0
0.79	2.24	2.65	3.61	10.26	12.13	95	A++	8.10	9.00	389	A+	4.38	6.46	2063	5.03	1.43	A+++	5.74	4.00	975	4.00	0
0.73	2.40	2.79	3.36	10.99	12.77	95	A++	8.08	9.00	390	A+	4.26	6.46	2119	5.02	1.44	A+++	5.88	3.70	880	3.70	0
0.76	2.31	2.74	3.48	10.58	12.54	95	A++	8.07	9.00	390	A+	4.33	6.46	2085	5.03	1.43	A+++	5.82	3.90	938	3.90	0
0.77	2.26	2.66	3.53	10.35	12.17	95	A++	8.09	9.00	390	A+	4.37	6.46	2070	5.03	1.43	A+++	5.79	3.90	943	3.90	0
0.85	2.22	2.65	3.87	10.17	12.13	95	A++	8.11	9.00	389	A+	4.40	6.46	2055	5.03	1.43	A+++	5.76	4.00	973	4.00	0
0.79	2.29	2.70	3.61	10.49	12.36	95	A++	8.08	9.00	390	A+	4.35	6.46	2077	5.03	1.43	A+++	5.83	3.90	936	3.90	0
0.80	2.25	2.67	3.66	10.30	12.22	95	A++	8.10	9.00	389	A+	4.38	6.46	2062	5.03	1.43	A+++	5.80	4.00	965	4.00	0
0.60	2.47	2.80	2.75	11.31	12.81	95	A++	8.40	8.00	334	A+	4.20	6.46	2149	5.01	1.45	A+++	5.86	3.60	860	3.60	0
0.64	2.43	2.80	2.93	11.13	12.81	95	A++	8.03	8.70	379	A+	4.23	6.46	2134	5.02	1.44	A+++	5.85	3.70	886	3.70	0
0.69	2.41	2.79	3.14	11.03	12.77	95	A++	7.93	9.00	398	A+	4.25	6.46	2126	5.02	1.44	A+++	5.84	3.70	886	3.70	0
0.69	2.32	2.75	3.14	10.62	12.59	95	A++	7.93	9.00	397	A+	4.32	6.46	2093	5.03	1.43	A+++	5.78	3.80	920	3.80	0
0.70	2.28	2.67	3.18	10.44	12.22	95	A++	7.95														

Combination tables

Indoor unit	Cooling capacity [kW]					Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]					Total heating capacity [kW]		
	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.
2.0+3.5+5.0+5.0	1.16	2.03	2.90	2.90	---	3.80	9.00	10.53	0.63	2.30	3.17	3.00	10.60	14.60	1.29	2.26	3.23	3.23	---	5.07	10.00	11.45
2.0+4.2+4.2+4.2	1.23	2.59	2.59	2.59	---	3.57	9.00	9.56	0.60	2.40	2.68	2.80	11.00	12.40	1.37	2.88	2.88	2.88	---	4.81	10.00	11.20
2.0+4.2+4.2+5.0	1.17	2.45	2.45	2.92	---	3.78	9.00	10.22	0.63	2.35	3.02	3.00	10.80	13.90	1.30	2.73	2.73	3.25	---	5.04	10.00	11.34
2.5+2.5+2.5+2.5	2.13	2.13	2.13	2.13	---	2.85	8.50	9.23	0.53	2.18	2.55	2.44	10.00	11.70	2.50	2.50	2.50	2.50	---	3.49	10.00	11.15
2.5+2.5+2.5+3.5	2.05	2.05	2.05	2.86	---	2.99	9.00	9.37	0.56	2.42	2.61	2.57	11.10	12.00	2.27	2.27	2.27	3.18	---	3.77	10.00	11.16
2.5+2.5+2.5+4.2	1.92	1.92	1.92	3.23	---	3.10	9.00	9.59	0.59	2.42	2.74	2.69	11.10	12.60	2.14	2.14	3.59	3.59	---	3.98	10.00	11.17
2.5+2.5+2.5+5.0	1.80	1.80	1.80	3.60	---	3.21	9.00	9.73	0.59	2.36	2.75	2.69	10.90	12.60	2.00	2.00	4.00	4.00	---	4.21	10.00	11.29
2.5+2.5+2.5+6.0	1.67	1.67	1.67	4.00	---	3.41	9.00	10.17	0.56	2.36	3.01	2.70	10.80	13.90	1.85	1.85	4.44	4.44	---	4.50	10.00	11.53
2.5+2.5+2.5+7.1	1.54	1.54	1.54	4.38	---	3.59	9.00	10.19	0.60	2.36	3.02	2.80	10.80	13.90	1.71	1.71	4.86	4.86	---	4.81	10.00	11.56
2.5+2.5+3.5+3.5	1.88	1.88	2.63	2.63	---	3.14	9.00	9.51	0.59	2.41	2.68	2.69	11.10	12.30	2.08	2.08	2.92	2.92	---	4.07	10.00	11.17
2.5+2.5+3.5+4.2	1.77	1.77	2.48	2.98	---	3.39	9.00	9.52	0.56	2.41	2.68	2.70	11.10	12.30	1.97	1.97	2.76	3.31	---	4.26	10.00	11.17
2.5+2.5+3.5+5.0	1.67	1.67	2.33	3.33	---	3.41	9.00	9.76	0.56	2.36	2.75	2.70	10.80	12.70	1.85	1.85	2.59	3.70	---	4.50	10.00	11.30
2.5+2.5+3.5+6.0	1.55	1.55	2.17	3.72	---	3.60	9.00	10.20	0.60	2.35	3.02	2.80	10.80	13.90	1.72	1.72	4.21	4.14	---	4.78	10.00	11.54
2.5+2.5+3.5+7.1	1.44	1.44	2.02	4.10	---	3.78	9.00	10.71	0.63	2.35	3.36	3.00	10.80	15.50	1.60	1.60	2.24	4.55	---	5.10	10.00	11.58
2.5+2.5+4.2+4.2	1.68	1.68	2.82	2.82	---	3.39	9.00	9.53	0.56	2.41	2.68	2.70	11.10	12.30	1.87	1.87	3.13	3.13	---	4.47	10.00	11.18
2.5+2.5+4.2+5.0	1.58	1.58	2.66	3.17	---	3.59	9.00	9.77	0.60	2.35	2.75	2.80	10.80	12.70	1.76	1.76	2.96	3.52	---	4.70	10.00	11.32
2.5+2.5+4.2+6.0	1.48	1.48	2.49	3.55	---	3.78	9.00	10.70	0.63	2.35	3.36	3.00	10.80	15.50	1.64	1.64	2.76	3.95	---	4.99	10.00	11.55
2.5+2.5+5.0+5.0	1.50	1.50	3.00	3.00	---	3.62	9.00	10.51	0.60	2.31	3.16	2.80	10.60	14.60	1.67	1.67	3.33	3.33	---	4.93	10.00	11.45
2.5+3.5+3.5+3.5	1.73	2.42	2.42	2.42	---	3.39	9.00	9.54	0.56	2.40	2.68	2.70	11.10	12.30	1.92	2.69	2.69	2.69	---	4.36	10.00	11.17
2.5+3.5+3.5+4.2	1.64	2.30	2.30	2.76	---	3.39	9.00	9.55	0.56	2.40	2.68	2.70	11.00	12.30	1.82	2.55	2.55	3.07	---	4.55	10.00	11.18
2.5+3.5+3.5+5.0	1.55	2.17	2.17	3.10	---	3.60	9.00	9.79	0.60	2.35	2.75	2.80	10.80	12.70	1.72	2.41	2.41	3.45	---	4.78	10.00	11.32
2.5+3.5+3.5+6.0	1.45	2.03	2.03	3.48	---	3.78	9.00	10.63	0.63	2.32	3.30	3.00	10.70	15.20	1.61	2.26	2.26	3.87	---	5.07	10.00	11.55
2.5+3.5+4.2+4.2	1.56	2.19	2.63	2.63	---	3.57	9.00	9.56	0.60	2.40	2.68	2.80	11.00	12.40	1.74	2.43	2.92	2.92	---	4.75	10.00	11.19
2.5+3.5+4.2+5.0	1.48	2.07	2.49	2.96	---	3.78	9.00	10.22	0.63	2.35	3.02	3.00	10.80	13.90	1.64	2.30	2.76	3.29	---	4.99	10.00	11.33
2.5+4.2+4.2+4.2	1.49	2.50	2.50	2.50	---	3.75	9.00	10.09	0.63	2.37	3.01	3.00	10.90	13.80	1.66	2.78	2.78	2.78	---	4.96	10.00	11.20
3.5+3.5+3.5+3.5	2.25	2.25	2.25	2.25	---	3.58	9.00	9.58	0.60	2.37	2.68	2.80	10.90	12.40	2.50	2.50	2.50	2.50	---	4.64	10.00	11.18
3.5+3.5+3.5+4.2	2.14	2.14	2.14	2.57	---	3.58	9.00	10.11	0.60	2.37	3.01	2.80	10.90	13.80	2.38	2.38	2.86	3.86	---	4.85	10.00	11.19
3.5+3.5+3.5+5.0	2.03	2.03	2.90	---	3.78	9.00	10.24	0.63	2.32	3.02	3.00	10.70	13.90	2.26	2.26	3.23	3.23	---	5.07	10.00	11.33	
3.5+3.5+4.2+4.2	2.05	2.05	2.45	2.45	---	3.76	9.00	10.12	0.63	2.37	3.01	3.00	10.90	13.80	2.27	2.27	2.73	2.73	---	5.04	10.00	11.20
1.5+1.5+1.5+1.5+1.5	1.50	1.50	1.50	1.50	1.50	2.48	7.50	7.81	0.48	1.65	1.76	2.19	7.60	8.10	2.00	2.00	2.00	2.00	2.00	2.77	10.00	10.90
1.5+1.5+1.5+1.5+2.0	1.41	1.41	1.41	1.41	1.88	2.55	7.50	8.22	0.48	1.65	1.92	2.19	7.60	8.90	1.88	1.88	1.88	1.88	2.50	2.92	10.00	10.90
1.5+1.5+1.5+1.5+2.5	1.41	1.41	1.41	1.41	2.35	2.63	8.00	8.49	0.51	1.85	2.03	2.32	8.50	9.40	1.76	1.76	1.76	1.76	2.94	3.06	10.00	10.90
1.5+1.5+1.5+1.5+3.5	1.26	1.26	1.26	1.26	2.95	2.77	8.00	9.02	0.53	1.84	2.27	2.44	8.50	10.40	1.58	1.58	1.58	1.58	3.68	3.35	10.00	11.55
1.5+1.5+1.5+1.5+4.2	1.32	1.32	1.32	1.32	3.71	2.88	9.00	9.39	0.53	2.26	2.45	2.44	10.40	11.30	1.47	1.47	1.47	1.47	4.12	3.55	10.00	11.55
1.5+1.5+1.5+1.5+5.0	1.23	1.23	1.23	1.23	4.09	2.99	9.00	9.70	0.56	2.25	2.58	2.57	10.40	11.90	1.36	1.36	1.36	1.36	4.55	3.77	10.00	11.69
1.5+1.5+1.5+1.5+6.0	1.13	1.13	1.13	1.13	4.50	3.14	9.00	10.06	0.57	2.25	2.78	2.61	10.30	12.80	1.25	1.25	1.25	1.25	5.00	4.07	10.00	11.93
1.5+1.5+1.5+1.5+7.1	1.03	1.03	1.03	1.03	4.88	3.48	9.00	10.39	0.56	2.25	2.98	2.60	10.30	13.70	1.15	1.15	1.15	1.15	5.42	4.39	10.00	11.96
1.5+1.5+1.5+2.0+2.0	1.41	1.41	1.41	1.41	1.88	1.88	2.63	8.00	8.48	0.51	1.85	2.03	2.32	8.50	9.40	1.76	1.76	2.35	2.35	3.06	10.00	10.90
1.5+1.5+1.5+2.0+2.5	1.33	1.33	1.33	1.78	2.22	2.70	8.00	8.75	0.51	1.85	2.15	2.32	8.50	9.90	1.67	1.67	2.22	2.78	3.20	10.00	11.54	
1.5+1.5+1.5+2.0+3.5	1.28	1.28	1.28	1.70	2.98	2.85	8.50	9.26	0.53	2.03	2.39	2.44	9.40	11.00	1.50	1.50	2.00	3.50	3.49	10.00	11.55	
1.5+1.5+1.5+2.0+4.2	1.26	1.26	1.26	1.68	3.53	2.95	9.00	9.63	0.53	2.26	2.58	2.44	10.40	11.90	1.40	1.40	1.87	3.93	3.69	10.00	11.55	
1.5+1.5+1.5+2.0+5.0	1.17	1.17	1.17	1.57	3.91	3.07	9.00	9.93	0.56	2.25	2.71	2.57	10.40	12.50	1.30	1.30	1.74	4.35	3.92	10.00	11.69	
1.5+1.5+1.5+2.0+6.0	1.08	1.08	1.08	1.44	4.32	3.21	9.00	10.17	0.57	2.25	2.84	2.61	10.30	13.10	1.20	1.20	1.60	4.80	4.21	10.00	11.93	
1.5+1.5+1.5+2.0+7.1	0.99	0.99	0.99	1.32	4.70	3.48	9.00	10.50	0.56	2.25	3.04	2.60	10.30	14.00	1.10	1.10	1.47	5.22	4.53	10.00	11.96	
1.5+1.5+1.5+2.5+2.5	1.26	1.26	2.11	2.11	2.77	8.00	9.01	0.53	1.84	2.27	2.44	8.50	10.40	1.58	1.58	2.63	2.63	3.35	10.00	11.54		
1.5+1.5+1.5+2.5+3.5	1.24	1.24	2.07	2.90	2.92	8.70	9.51	0.53	2.13	2.51	2.44	9.80	11.60	1.43	1.43	2.38	3.33	3.63	10.00	11.55		
1.5+1.5+1.5+2.5+4.2	1.21	1.21	2.01	3.38	3.0																	

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)						Seasonal data heating (warm climate)					
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.86	2.29	2.70	3.96	10.49	12.36	95	A++	8.09	9.00	390	A+	4.36	6.46	2075	5.08	1.38	A+++	5.80	3.90	940	3.90	0
0.86	2.36	2.78	3.96	10.81	12.72	95	A++	8.10	9.00	389	A+	4.30	6.46	2099	5.07	1.39	A+++	5.88	3.80	905	3.80	0
0.89	2.27	2.73	4.09	10.39	12.49	95	A++	8.09	9.00	389	A+	4.37	6.46	2067	5.08	1.38	A+++	5.82	3.90	938	3.90	0
0.62	2.45	2.80	2.84	11.22	12.81	95	A++	8.07	8.50	369	A+	4.22	6.46	2141	5.02	1.44	A+++	5.86	3.60	860	3.60	0
0.67	2.41	2.80	3.05	11.03	12.81	95	A++	8.04	9.00	392	A+	4.25	6.46	2125	5.03	1.43	A+++	5.85	3.70	886	3.70	0
0.71	2.40	2.79	3.27	10.99	12.77	95	A++	8.05	9.00	392	A+	4.27	6.46	2118	5.03	1.43	A+++	5.84	3.70	886	3.70	0
0.71	2.31	2.75	3.27	10.58	12.59	95	A++	8.04	9.00	392	A+	4.33	6.46	2085	5.04	1.42	A+++	5.78	3.90	944	3.90	0
0.72	2.26	2.67	3.31	10.35	12.22	95	A++	8.06	9.00	391	A+	4.37	6.46	2069	5.05	1.41	A+++	5.75	3.90	950	3.90	0
0.79	2.22	2.65	3.61	10.17	12.13	95	A++	8.08	9.00	390	A+	4.40	6.46	2054	5.05	1.41	A+++	5.71	4.00	980	4.00	0
0.71	2.40	2.79	3.27	10.99	12.77	95	A++	8.05	9.00	392	A+	4.27	6.46	2117	5.03	1.43	A+++	5.86	3.70	884	3.70	0
0.76	2.38	2.79	3.48	10.90	12.77	95	A++	8.05	9.00	391	A+	4.28	6.46	2109	5.03	1.43	A+++	5.86	3.70	884	3.70	0
0.79	2.29	2.74	3.61	10.49	12.54	95	A++	8.05	9.00	391	A+	4.35	6.46	2077	5.05	1.41	A+++	5.79	3.90	942	3.90	0
0.80	2.25	2.66	3.66	10.30	12.17	95	A++	8.07	9.00	391	A+	4.38	6.46	2062	5.05	1.41	A+++	5.76	4.00	972	4.00	0
0.85	2.21	2.65	3.87	10.12	12.13	95	A++	8.09	9.00	390	A+	4.41	6.46	2047	5.05	1.41	A+++	5.72	4.00	978	4.00	0
0.79	2.36	2.79	3.61	10.81	12.77	95	A++	8.06	9.00	391	A+	4.30	6.46	2101	5.04	1.42	A+++	5.87	3.80	907	3.80	0
0.82	2.27	2.74	3.74	10.39	12.54	95	A++	8.06	9.00	391	A+	4.37	6.46	2069	5.05	1.41	A+++	5.80	3.90	940	3.90	0
0.82	2.23	2.66	3.74	10.21	12.17	95	A++	8.08	9.00	390	A+	4.40	6.46	2054	5.05	1.41	A+++	5.77	4.00	970	4.00	0
0.85	2.25	2.70	3.87	10.30	12.36	95	A++	8.07	9.00	391	A+	4.38	6.46	2061	5.05	1.41	A+++	5.82	3.90	938	3.90	0
0.79	2.40	2.79	3.61	10.99	12.77	95	A++	8.07	9.00	390	A+	4.27	6.46	2114	5.06	1.40	A+++	5.86	3.70	883	3.70	0
0.81	2.38	2.79	3.70	10.90	12.77	95	A++	8.08	9.00	390	A+	4.29	6.46	2107	5.07	1.39	A+++	5.86	3.70	884	3.70	0
0.84	2.29	2.74	3.83	10.49	12.54	95	A++	8.07	9.00	390	A+	4.36	6.46	2074	5.08	1.38	A+++	5.79	3.90	942	3.90	0
0.85	2.25	2.66	3.87	10.30	12.17	95	A++	8.09	9.00	390	A+	4.39	6.46	2059	5.08	1.38	A+++	5.76	4.00	972	4.00	0
0.86	2.36	2.78	3.96	10.81	12.72	95	A++	8.08	9.00	390	A+	4.31	6.46	2099	5.07	1.39	A+++	5.87	3.80	906	3.80	0
0.86	2.27	2.74	3.96	10.39	12.54	95	A++	8.08	9.00	390	A+	4.37	6.46	2066	5.08	1.38	A+++	5.81	3.90	940	3.90	0
0.89	2.34	2.78	4.09	10.71	12.72	95	A++	8.09	9.00	390	A+	4.32	6.46	2091	5.08	1.38	A+++	5.88	3.80	904	3.80	0
0.84	2.33	2.79	3.83	10.67	12.77	95	A++	8.08	9.00	390	A+	4.33	6.46	2085	5.07	1.39	A+++	5.88	3.70	881	3.70	0
0.86	2.31	2.78	3.96	10.58	12.72	95	A++	8.08	9.00	390	A+	4.35	6.46	2077	5.07	1.39	A+++	5.87	3.80	905	3.80	0
0.89	2.23	2.74	4.09	10.21	12.54	95	A++	8.08	9.00	390	A+	4.42	6.46	2046	5.08	1.38	A+++	5.81	3.90	939	3.90	0
0.92	2.30	2.78	4.22	10.53	12.72	95	A++	8.09	9.00	390	A+	4.37	6.46	2069	5.08	1.38	A+++	5.89	3.80	904	3.80	0
0.42	2.14	2.47	1.94	9.80	11.30	95	A++	7.90	7.50	333	A+	4.25	6.46	2127	5.22	1.24	A+++	5.45	3.10	796	3.10	0
0.44	2.13	2.47	2.02	9.75	11.30	95	A++	7.89	7.50	333	A+	4.26	6.46	2119	5.22	1.24	A+++	5.45	3.20	822	3.20	0
0.48	2.11	2.47	2.19	9.66	11.30	95	A++	7.80	8.00	359	A+	4.28	6.46	2111	5.23	1.23	A+++	5.44	3.20	823	3.20	0
0.52	2.08	2.77	2.37	9.52	12.17	95	A++	7.81	8.00	359	A+	4.31	6.46	2096	5.23	1.23	A+++	5.43	3.30	850	3.30	0
0.55	2.07	2.77	2.54	9.48	12.17	95	A++	7.66	9.00	411	A+	4.33	6.46	2088	5.24	1.22	A+++	5.43	3.30	851	3.30	0
0.56	2.00	2.78	2.58	9.16	12.22	95	A++	7.69	9.00	410	A+	4.40	6.46	2055	5.25	1.21	A+++	5.36	3.40	888	3.40	0
0.56	1.99	2.70	2.58	9.11	11.85	95	A++	7.71	9.00	409	A+	4.42	6.46	2043	5.25	1.21	A+++	5.32	3.50	920	3.50	0
0.62	1.96	2.68	2.84	8.98	11.76	95	A++	7.73	9.00	408	A+	4.43	6.46	2039	5.26	1.20	A+++	5.28	3.60	953	3.60	0
0.48	2.11	2.57	2.19	9.66	11.30	95	A++	7.80	8.00	359	A+	4.28	6.46	2110	5.23	1.23	A+++	5.46	3.20	820	3.20	0
0.50	2.10	2.77	2.28	9.62	12.17	95	A++	7.80	8.00	359	A+	4.30	6.46	2102	5.23	1.23	A+++	5.46	3.20	821	3.20	0
0.54	2.07	2.77	2.45	9.48	12.17	95	A++	7.76	8.50	383	A+	4.33	6.46	2087	5.24	1.22	A+++	5.44	3.30	848	3.30	0
0.58	2.06	2.77	2.67	9.43	12.17	95	A++	7.81	9.00	404	A+	4.35	6.46	2079	5.24	1.22	A+++	5.44	3.30	849	3.30	0
0.58	1.99	2.78	2.67	9.11	12.22	95	A++	7.83	9.00	403	A+	4.42	6.46	2046	5.25	1.21	A+++	5.37	3.50	912	3.50	0
0.61	1.96	2.70	2.80	8.98	11.85	95	A++	7.85	9.00	402	A+	4.45	6.46	2031	5.26	1.20	A+++	5.33	3.50	918	3.50	0
0.65	1.93	2.68	2.97	8.84	11.76	95	A++	7.86	9.00	401	A+	4.48	6.46	2018	5.26	1.20	A+++	5.30	3.60	950	3.60	0
0.52	2.08	2.77	2.37	9.52	12.17	95	A++	7.81	8.00	359	A+	4.32	6.46	2094	5.23	1.23	A+++	5.47	3.30	845	3.30	0
0.56	2.06	2.77	2.58	9.43	12.17	95	A++	7.71	8.70	395	A+	4.35	6.46	2078	5.24	1.22	A+++	5.46	3.30	847	3.30	0
0.60	2.04	2.77	2.75	9.34	12.17	95	A++	7.66	9.00	411	A+	4.36	6.46	2071	5.24	1.22	A+++	5.45	3.30	847	3.30	0
0.62	1.98	2.78	2.84	9.07	12.22	95	A++	7.69	9.00	410	A+	4.43	6.46	2038	5.26	1.20	A+++	5.38	3.50	910	3.50	0
0.63	1.95	2.70	2.88	8.93	11.85	95	A++	7.70	9.00	409	A+	4.44	6.46	2034	5.26	1.20	A+++	5.35	3.60	943	3.60	0
0.67	1.92	2.68	3.05	8.79	11.76	95	A++	7.72	9.00	408	A+	4.47	6.46	2022	5.26	1.20	A+++	5.31	3.60	949	3.60	0
0.62	2.04	2.77	2.84	9.34	12.17	95	A++	7.68	9.00	411	A+	4.37	6.46	2070	5.24	1.22	A+++	5.47	3.30	845	3.30	0
0.65	2.03	2.77	2.97	9.30	12.17	95	A++	7.68	9.00	410	A+	4.38	6.46	2062	5.25	1.21	A+++	5.46	3.40	871	3.40	0
0.67	1.97	2.77	3.05	9.02	12.17	95	A++	7.70	9.00	409	A+</td											

Combination tables

Indoor unit	Cooling capacity [kW]					Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]					Total heating capacity [kW]		
	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.
1.5+1.5+2.0+2.5+5.0	1.08	1.08	1.44	1.80	3.60	3.21	9.00	10.16	0.60	2.25	2.84	2.74	10.40	13.10	1.20	1.20	1.60	2.00	4.00	4.21	10.00	11.69
1.5+1.5+2.0+2.5+6.0	1.00	1.00	1.33	1.67	4.00	3.48	9.00	10.50	0.56	2.25	3.04	2.60	10.30	14.00	1.11	1.11	1.48	1.85	4.44	4.50	10.00	11.93
1.5+1.5+2.0+2.5+7.1	0.92	0.92	1.23	1.54	4.38	3.67	9.00	10.61	0.59	2.25	3.11	2.80	10.30	14.30	1.03	1.03	1.37	1.71	4.86	4.81	10.00	11.96
1.5+1.5+2.0+3.5+3.5	1.13	1.13	1.50	2.63	2.63	3.14	9.00	10.10	0.56	2.26	2.84	2.57	10.40	13.00	1.25	1.25	1.67	2.92	2.92	4.07	10.00	11.55
1.5+1.5+2.0+3.5+4.2	1.06	1.06	1.42	2.48	2.98	3.24	9.00	10.22	0.60	2.26	2.90	2.74	10.40	13.40	1.18	1.18	1.57	2.76	3.31	4.26	10.00	11.56
1.5+1.5+2.0+3.5+5.0	1.00	1.00	1.33	2.33	3.33	3.48	9.00	10.40	0.56	2.25	2.98	2.60	10.30	13.70	1.11	1.11	1.48	2.59	3.70	4.50	10.00	11.70
1.5+1.5+2.0+3.5+6.0	0.93	0.93	1.24	2.17	3.72	3.67	9.00	10.62	0.59	2.25	3.11	2.80	10.30	14.30	1.03	1.03	1.38	2.41	4.14	4.78	10.00	11.94
1.5+1.5+2.0+3.5+7.1	0.87	0.87	1.15	2.02	4.10	3.67	9.00	10.73	0.59	2.25	3.18	2.80	10.30	14.60	0.96	0.96	1.28	2.24	4.55	5.10	10.00	11.97
1.5+1.5+2.0+4.2+4.2	1.01	1.01	1.34	2.82	2.82	3.46	9.00	10.22	0.56	2.26	2.90	2.70	10.40	13.40	1.12	1.12	1.49	3.13	3.13	4.47	10.00	11.58
1.5+1.5+2.0+4.2+5.0	0.95	0.95	1.27	2.66	3.17	3.48	9.00	10.40	0.56	2.25	2.98	2.60	10.30	13.70	1.06	1.06	1.41	2.96	3.52	4.70	10.00	11.71
1.5+1.5+2.0+4.2+6.0	0.89	0.89	1.18	2.49	3.55	3.67	9.00	10.73	0.59	2.25	3.18	2.80	10.30	14.60	0.99	0.99	1.32	2.76	3.95	4.99	10.00	11.95
1.5+1.5+2.0+5.0+5.0	0.90	0.90	1.20	3.00	3.00	3.69	9.00	10.66	0.59	2.21	3.12	2.80	10.20	14.30	1.00	1.00	1.33	3.33	3.33	4.93	10.00	11.84
1.5+1.5+2.5+2.5+2.5	1.24	1.24	2.07	2.07	2.92	8.70	9.50	0.53	2.14	2.51	2.44	9.80	11.60	1.43	1.43	2.38	2.38	2.38	3.63	10.00	11.54	
1.5+1.5+2.5+2.5+3.5	1.17	1.17	1.96	1.96	2.74	3.07	9.00	9.87	0.56	2.26	2.71	2.57	10.40	12.50	1.30	1.30	2.17	2.17	3.04	3.92	10.00	11.55
1.5+1.5+2.5+2.5+4.2	1.11	1.11	1.84	1.84	3.10	3.17	9.00	10.09	0.60	2.26	2.84	2.74	10.40	13.00	1.23	1.23	2.05	3.44	4.12	10.00	11.55	
1.5+1.5+2.5+2.5+5.0	1.04	1.04	1.73	1.73	3.46	3.29	9.00	10.39	0.60	2.25	2.98	2.74	10.30	13.70	1.15	1.15	1.92	3.85	4.36	10.00	11.69	
1.5+1.5+2.5+2.5+6.0	0.96	0.96	1.61	1.61	3.86	3.48	9.00	10.61	0.56	2.25	3.11	2.60	10.30	14.30	1.07	1.07	1.79	4.29	4.64	10.00	11.93	
1.5+1.5+2.5+2.5+7.1	0.89	0.89	1.49	1.49	4.23	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	0.99	0.99	1.66	4.70	4.96	10.00	11.96	
1.5+1.5+2.5+3.5+3.5	1.08	1.08	1.80	2.52	2.52	3.21	9.00	10.22	0.60	2.26	2.90	2.74	10.40	13.40	1.20	1.20	2.00	2.80	2.80	4.21	10.00	11.55
1.5+1.5+2.5+3.5+4.2	1.02	1.02	1.70	2.39	2.86	3.46	9.00	10.22	0.56	2.26	2.90	2.70	10.40	13.40	1.14	1.14	1.89	2.65	3.18	4.41	10.00	11.56
1.5+1.5+2.5+3.5+5.0	0.96	0.96	1.61	2.25	3.21	3.48	9.00	10.40	0.56	2.25	2.98	2.60	10.30	13.70	1.07	1.07	1.79	2.50	3.57	4.64	10.00	11.70
1.5+1.5+2.5+3.5+6.0	0.90	0.90	1.50	2.10	3.60	3.67	9.00	10.73	0.59	2.25	3.18	2.80	10.30	14.60	1.00	1.00	1.67	2.33	4.00	4.93	10.00	11.94
1.5+1.5+2.5+4.2+4.2	0.97	0.97	1.62	2.72	2.72	3.47	9.00	10.23	0.56	2.26	2.90	2.70	10.40	13.40	1.08	1.08	1.80	3.02	3.02	4.61	10.00	11.58
1.5+1.5+2.5+4.2+5.0	0.92	0.92	1.53	2.57	3.06	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	1.02	1.02	1.70	2.86	3.40	4.85	10.00	11.71
1.5+1.5+2.5+5.0+5.0	0.87	0.87	1.45	2.90	2.90	3.69	9.00	10.77	0.59	2.21	3.19	2.80	10.20	14.60	0.97	0.97	1.61	3.23	3.23	5.07	10.00	11.84
1.5+1.5+3.5+3.5+3.5	1.00	1.00	2.33	2.33	2.33	3.47	9.00	10.24	0.56	2.26	2.91	2.70	10.40	13.40	1.11	1.11	2.59	2.59	2.59	4.50	10.00	11.56
1.5+1.5+3.5+3.5+4.2	0.95	0.95	2.22	2.22	2.66	3.47	9.00	10.24	0.56	2.26	2.91	2.70	10.40	13.40	1.06	1.06	2.46	2.46	2.96	4.70	10.00	11.58
1.5+1.5+3.5+3.5+5.0	0.90	0.90	2.10	2.10	3.00	3.67	9.00	10.73	0.59	2.25	3.18	2.80	10.30	14.60	1.00	1.00	2.33	2.33	3.33	4.93	10.00	11.71
1.5+1.5+3.5+4.2+4.2	0.91	0.91	2.11	2.54	2.54	3.65	9.00	10.67	0.60	2.26	3.18	2.80	10.40	14.60	1.01	1.01	2.35	2.82	2.82	4.90	10.00	11.59
1.5+2.0+2.0+2.0+2.0	1.26	1.68	1.68	1.68	2.77	8.00	8.99	0.53	1.85	2.27	2.44	8.50	10.40	1.58	2.11	2.11	2.11	3.35	10.00	11.54		
1.5+2.0+2.0+2.0+2.5	1.28	1.70	1.70	2.13	2.85	8.50	9.25	0.53	2.06	2.39	2.44	9.50	11.00	1.50	2.00	2.00	2.00	2.50	3.49	10.00	11.54	
1.5+2.0+2.0+2.0+3.5	1.23	1.64	1.64	2.86	2.99	9.00	9.74	0.56	2.26	2.64	2.57	10.40	12.10	1.36	1.82	1.82	1.82	3.18	3.77	10.00	11.55	
1.5+2.0+2.0+2.0+4.2	1.15	1.54	1.54	3.23	3.10	9.00	9.97	0.56	2.26	2.77	2.57	10.40	12.70	1.28	1.71	1.71	1.71	3.59	3.98	10.00	11.55	
1.5+2.0+2.0+2.0+5.0	1.08	1.44	1.44	3.60	3.21	9.00	10.27	0.60	2.25	2.91	2.74	10.40	13.40	1.20	1.60	1.60	1.60	4.00	4.21	10.00	11.69	
1.5+2.0+2.0+2.0+6.0	1.00	1.33	1.33	4.00	3.48	9.00	10.49	0.56	2.25	3.04	2.60	10.30	14.00	1.11	1.48	1.48	1.48	4.44	4.50	10.00	11.70	
1.5+2.0+2.0+2.0+7.1	0.92	1.23	1.23	4.38	3.67	9.00	10.71	0.59	2.25	3.18	2.80	10.30	14.60	1.03	1.37	1.37	1.37	4.86	4.81	10.00	11.71	
1.5+2.0+2.0+2.5+2.5	1.24	1.66	1.66	2.07	2.07	2.92	8.70	9.49	0.53	2.14	2.51	2.44	9.80	11.60	1.43	1.90	1.90	2.38	2.38	3.63	10.00	11.54
1.5+2.0+2.0+2.5+3.5	1.17	1.57	1.57	1.96	2.74	3.07	9.00	9.86	0.56	2.26	2.70	2.57	10.40	12.50	1.30	1.74	1.74	2.17	3.04	3.92	10.00	11.56
1.5+2.0+2.0+2.5+4.2	1.11	1.48	1.48	1.84	3.10	3.17	9.00	10.09	0.60	2.26	2.84	2.74	10.40	13.00	1.23	1.64	1.64	2.05	3.44	4.12	10.00	11.58
1.5+2.0+2.0+2.5+5.0	1.04	1.38	1.38	1.73	3.46	3.29	9.00	10.38	0.60	2.25	2.98	2.74	10.40	13.70	1.15	1.54	1.54	1.92	3.85	4.36	10.00	11.71
1.5+2.0+2.0+2.5+6.0	0.96	1.29	1.29	1.91	3.86	3.48	9.00	10.61	0.56	2.25	3.11	2.60	10.30	14.30	1.07	1.43	1.43	1.79	4.29	4.64	10.00	11.72
1.5+2.0+2.0+2.5+7.1	0.89	1.19	1.19	1.49	4.23	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	0.99	1.32	1.32	1.66	4.70	4.96	10.00	11.54
1.5+2.0+2.0+2.5+8.5	1.08	1.44	1.44	2.52	2.52	3.21	9.00	10.21	0.60	2.26	2.90	2.74	10.40	13.40	1.20	1.60	1.60	2.80	2.80	4.21	10.00	11.53
1.5+2.0+2.0+3.5+4.2	1.02	1.36	1.36	2.39	2.86	3.46	9.00	10.22	0.56	2.26	2.90	2.70	10.40	13.40	1.14	1.52	1.52	2.65	3.18	4.41	10.00	11.55
1.5+2.0+2.0+3.5+5.0	0.96	1.29	1.29	2.25	3.21	3.48	9.00	10.40	0.56	2.25	2.98	2.60	10.30	13.70	1.07	1.4						

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling			Seasonal data heating (average climate)						Seasonal data heating (warm climate)						
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.65	2.07	2.78	2.97	9.48	12.22	95	A++	7.71	9.00	409	A+	4.45	6.46	2032	5.25	1.21	A+++	5.34	3.50	917	3.50	0
0.65	2.03	2.70	2.97	9.30	11.85	95	A++	7.73	9.00	408	A+	4.47	6.46	2022	5.26	1.20	A+++	5.34	3.60	943	3.60	0
0.71	2.02	2.68	3.27	9.25	11.76	95	A++	7.76	9.00	406	A+	4.50	6.46	2010	5.26	1.20	A+++	5.30	3.70	976	3.70	0
0.65	2.08	2.77	2.97	9.52	12.17	95	A++	7.68	9.00	410	A+	4.38	6.46	2064	5.24	1.22	A+++	5.43	3.40	877	3.40	0
0.67	2.07	2.77	3.05	9.48	12.17	95	A++	7.69	9.00	410	A+	4.39	6.46	2056	5.24	1.22	A+++	5.42	3.40	877	3.40	0
0.70	2.06	2.77	3.18	9.43	12.17	95	A++	7.72	9.00	408	A+	4.46	6.46	2024	5.26	1.20	A+++	5.35	3.60	941	3.60	0
0.70	2.02	2.69	3.18	9.25	11.81	95	A++	7.74	9.00	407	A+	4.49	6.46	2015	5.26	1.20	A+++	5.35	3.60	941	3.60	0
0.76	1.99	2.68	3.48	9.11	11.76	95	A++	7.76	9.00	406	A+	4.53	6.46	1995	5.26	1.20	A+++	5.35	3.70	968	3.70	0
0.71	2.07	2.76	3.27	9.48	12.13	95	A++	7.70	9.00	409	A+	4.41	6.46	2048	5.25	1.21	A+++	5.44	3.40	875	3.40	0
0.74	2.06	2.77	3.40	9.43	12.17	95	A++	7.73	9.00	408	A+	4.45	6.46	2028	5.26	1.20	A+++	5.37	3.60	939	3.60	0
0.74	2.05	2.69	3.40	9.39	11.81	95	A++	7.75	9.00	407	A+	4.48	6.46	2016	5.26	1.20	A+++	5.33	3.70	972	3.70	0
0.77	2.00	2.73	3.53	9.16	11.95	95	A++	7.70	9.00	410	A++	4.60	6.46	1966	5.28	1.18	A+++	5.36	3.60	939	3.60	0
0.56	2.08	2.77	2.58	9.52	12.17	95	A++	7.72	8.70	395	A+	4.36	6.46	2071	5.24	1.22	A+++	5.43	3.40	877	3.40	0
0.63	2.07	2.77	2.88	9.48	12.17	95	A++	7.67	9.00	411	A+	4.39	6.46	2057	5.24	1.22	A+++	5.42	3.40	879	3.40	0
0.65	2.07	2.77	2.97	9.48	12.17	95	A++	7.68	9.00	411	A+	4.41	6.46	2049	5.25	1.21	A+++	5.41	3.40	879	3.40	0
0.67	2.06	2.78	3.05	9.43	12.22	95	A++	7.71	9.00	409	A+	4.45	6.46	2030	5.26	1.20	A+++	5.34	3.60	943	3.60	0
0.68	2.05	2.70	3.10	9.39	11.85	95	A++	7.73	9.00	408	A+	4.48	6.46	2018	5.26	1.20	A+++	5.30	3.70	976	3.70	0
0.74	2.05	2.57	3.40	9.39	11.76	95	A++	7.75	9.00	406	A+	4.51	6.46	2006	5.27	1.19	A+++	5.27	3.70	983	3.70	0
0.67	2.07	2.77	3.05	9.48	12.17	95	A++	7.68	9.00	410	A+	4.41	6.46	2048	5.25	1.21	A+++	5.43	3.40	877	3.40	0
0.71	2.07	2.77	3.27	9.48	12.17	95	A++	7.69	9.00	410	A+	4.43	6.46	2041	5.25	1.21	A+++	5.42	3.50	903	3.50	0
0.71	2.05	2.77	3.27	9.39	12.17	95	A++	7.72	9.00	408	A+	4.47	6.46	2023	5.26	1.20	A+++	5.35	3.60	941	3.60	0
0.74	2.05	2.69	3.40	9.39	11.81	95	A++	7.74	9.00	407	A+	4.49	6.46	2011	5.27	1.19	A+++	5.32	3.70	974	3.70	0
0.74	2.06	2.75	3.40	9.43	12.13	95	A++	7.70	9.00	410	A+	4.44	6.46	2033	5.26	1.20	A+++	5.43	3.50	901	3.50	0
0.77	2.05	2.77	3.53	9.39	12.17	95	A++	7.73	9.00	408	A+	4.48	6.46	2016	5.27	1.19	A+++	5.37	3.60	939	3.60	0
0.79	2.00	2.73	3.61	9.16	11.95	95	A++	7.67	9.00	411	A++	4.60	6.46	1964	5.27	1.19	A+++	5.38	3.60	937	3.60	0
0.71	2.05	2.77	3.27	9.39	12.17	95	A++	7.69	9.00	410	A+	4.48	6.46	2018	5.25	1.21	A+++	5.46	3.50	897	3.50	0
0.76	2.04	2.76	3.48	9.34	12.13	95	A++	7.70	9.00	410	A+	4.49	6.46	2011	5.26	1.20	A+++	5.46	3.50	897	3.50	0
0.79	2.03	2.77	3.61	9.30	12.17	95	A++	7.73	9.00	408	A+	4.53	6.46	1994	5.27	1.19	A+++	5.39	3.60	935	3.60	0
0.82	2.04	2.76	3.74	9.34	12.13	95	A++	7.71	9.00	409	A+	4.51	6.46	2003	5.26	1.20	A+++	5.47	3.50	896	3.50	0
0.52	2.07	2.77	2.37	9.48	12.17	95	A++	7.81	8.00	359	A+	4.40	6.46	2056	5.24	1.22	A+++	5.43	3.40	877	3.40	0
0.55	2.07	2.77	2.50	9.48	12.17	95	A++	7.83	8.50	380	A+	4.41	6.46	2048	5.25	1.21	A+++	5.42	3.40	877	3.40	0
0.58	2.06	2.77	2.67	9.43	12.17	95	A++	7.67	9.00	411	A+	4.44	6.46	2034	5.26	1.20	A+++	5.41	3.50	905	3.50	0
0.62	2.06	2.77	2.84	9.43	12.17	95	A++	7.68	9.00	411	A+	4.46	6.46	2027	5.26	1.20	A+++	5.41	3.50	906	3.50	0
0.65	2.05	2.78	2.97	9.39	12.22	95	A++	7.71	9.00	409	A+	4.49	6.46	2011	5.27	1.19	A+++	5.34	3.70	970	3.70	0
0.65	2.04	2.65	2.97	9.34	12.13	95	A++	7.73	9.00	408	A+	4.52	6.46	1999	5.27	1.19	A+++	5.30	3.70	977	3.70	0
0.71	2.00	2.66	3.27	9.16	12.17	95	A++	7.76	9.00	406	A++	4.60	6.46	1964	5.29	1.17	A+++	5.30	3.80	1003	3.80	0
0.56	2.07	2.61	2.58	9.48	11.95	95	A++	7.86	8.70	388	A+	4.43	6.46	2040	5.25	1.21	A+++	5.43	3.50	902	3.50	0
0.63	2.06	2.66	2.88	9.43	12.17	95	A++	7.90	9.00	399	A+	4.46	6.46	2026	5.26	1.20	A+++	5.42	3.50	903	3.50	0
0.65	2.05	2.65	2.97	9.39	12.13	95	A++	7.90	9.00	399	A+	4.48	6.46	2019	5.26	1.20	A+++	5.42	3.60	930	3.60	0
0.67	2.04	2.66	3.05	9.34	12.17	95	A++	7.93	9.00	397	A+	4.51	6.46	2005	5.27	1.19	A+++	5.35	3.70	968	3.70	0
0.68	2.04	2.65	3.10	9.34	12.13	95	A++	7.95	9.00	396	A+	4.53	6.46	1993	5.28	1.18	A+++	5.31	3.80	1001	3.80	0
0.74	2.00	2.66	3.40	9.16	12.17	95	A++	7.97	9.00	395	A++	4.62	6.46	1958	5.29	1.17	A+++	5.31	3.80	1001	3.80	0
0.67	2.05	2.66	3.05	9.39	12.17	95	A++	7.91	9.00	399	A+	4.48	6.46	2018	5.26	1.20	A+++	5.43	3.60	927	3.60	0
0.71	2.05	2.66	3.27	9.39	12.17	95	A++	7.91	9.00	398	A+	4.47	6.46	2023	5.27	1.19	A+++	5.43	3.60	928	3.60	0
0.71	2.04	2.66	3.27	9.34	12.22	95	A++	7.94	9.00	397	A+	4.52	6.46	1998	5.28	1.18	A+++	5.36	3.70	966	3.70	0
0.74	2.00	2.67	3.40	9.16	12.13	95	A++	7.96	9.00	396	A++	4.60	6.46	1963	5.30	1.16	A+++	5.36	3.80	992	3.80	0
0.74	2.05	2.76	3.40	9.39	12.17	95	A++	7.92	9.00	398	A+	4.48	6.46	2016	5.27	1.19	A+++	5.44	3.60	926	3.60	0
0.77	2.03	2.77	3.53	9.30	11.95	95	A++	7.95	9.00	396	A+	4.54	6.46	1991	5.28	1.18	A+++	5.37	3.80	990	3.80	0
0.79	2.00	2.73	3.61	9.16	12.17	95	A++	7.95	9.00	396	A++	4.63	6.46	1954	5.30	1.16	A+++	5.38	3.80	989	3.80	0
0.58	2.07	2.77	2.67	9.48	12.17	95	A++	7.89	9.00	399	A+	4.43	6.46	2041	5.25	1.21	A+++	5.43	3.50	903	3.50	0
0.65	2.06	2.77	2.97	9.43	12.17	95	A++	7.91	9.00	399	A+	4.46	6.46	2027	5.26	1.20	A+++	5.41	3.50	905	3.50	0
0.67	2.05	2.77	3.05	9.39	12.17	95	A++	7.91	9.00	398	A+	4.47	6.46	2020	5.26	1.20	A+++	5.41	3.60	931	3.60	0
0.70	2.04	2.78	3.18	9.34	12.22	95	A++	7.94	9.00	397	A+	4.51	6.46	2005								

Combination tables

Indoor unit	Cooling capacity [kW]					Total cooling capacity [kW]			Power input cooling [kW]			Total current cooling [A]			Heating capacity [kW]					Total heating capacity [kW]		
	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Room A	Room B	Room C	Room D	Room E	Min.	Nom.	Max.
1.5+2.5+2.5+3.5+3.5	1.00	1.67	1.67	2.33	2.33	3.46	9.00	10.22	0.56	2.26	2.90	2.70	10.40	13.40	1.11	1.85	1.85	2.59	2.59	4.50	10.00	11.55
1.5+2.5+2.5+3.5+4.2	0.95	1.58	1.58	2.22	2.66	3.47	9.00	10.23	0.56	2.26	2.90	2.70	10.40	13.40	1.06	1.76	1.76	2.46	2.96	4.70	10.00	11.56
1.5+2.5+2.5+3.5+5.0	0.90	1.50	1.50	2.10	3.00	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	1.00	1.67	1.67	2.33	3.33	4.93	10.00	11.70
1.5+2.5+2.5+4.2+4.2	0.91	1.51	1.51	2.54	2.54	3.65	9.00	10.66	0.60	2.26	3.18	2.80	10.40	14.60	1.01	1.68	1.68	2.82	2.82	4.90	10.00	11.58
1.5+2.5+3.5+3.5+3.5	0.93	1.55	2.17	2.17	2.17	3.65	9.00	10.24	0.60	2.26	2.91	2.80	10.40	13.40	1.03	1.72	2.41	2.41	2.41	4.78	10.00	11.56
1.5+2.5+3.5+3.5+4.2	0.89	1.48	2.07	2.07	2.49	3.65	9.00	10.77	0.60	2.25	3.25	2.80	10.40	14.90	0.99	1.64	2.30	2.30	2.76	4.99	10.00	11.58
1.5+3.5+3.5+3.5+3.5	0.87	2.03	2.03	2.03	2.03	3.66	9.00	10.79	0.60	2.25	3.25	2.80	10.40	15.00	0.97	2.26	2.26	2.26	2.26	5.07	10.00	11.58
2.0+2.0+2.0+2.0+2.0	1.70	1.70	1.70	1.70	1.70	2.85	8.50	9.24	0.53	2.06	2.39	2.44	9.50	11.00	2.00	2.00	2.00	2.00	3.49	10.00	11.54	
2.0+2.0+2.0+2.0+2.5	1.66	1.66	1.66	1.66	2.07	2.92	8.70	9.49	0.53	2.14	2.51	2.44	9.80	11.60	1.90	1.90	1.90	1.90	2.38	3.63	10.00	11.54
2.0+2.0+2.0+2.0+3.5	1.57	1.57	1.57	1.57	2.74	3.07	9.00	9.85	0.56	2.26	2.70	2.57	10.40	12.50	1.74	1.74	1.74	1.74	3.04	3.92	10.00	11.55
2.0+2.0+2.0+2.0+4.2	1.48	1.48	1.48	1.48	3.10	3.17	9.00	10.08	0.60	2.26	2.84	2.74	10.40	13.00	1.64	1.64	1.64	1.64	3.44	4.12	10.00	11.55
2.0+2.0+2.0+2.0+5.0	1.38	1.38	1.38	1.38	3.46	3.29	9.00	10.38	0.60	2.25	2.98	2.74	10.40	13.70	1.54	1.54	1.54	1.54	3.85	4.36	10.00	11.69
2.0+2.0+2.0+2.0+6.0	1.29	1.29	1.29	3.86	3.48	9.00	10.60	0.56	2.25	3.11	2.60	10.30	14.30	1.43	1.43	1.43	1.43	4.29	4.64	10.00	11.93	
2.0+2.0+2.0+2.0+7.1	1.19	1.19	1.19	4.23	3.67	9.00	10.71	0.59	2.25	3.18	2.80	10.30	14.60	1.32	1.32	1.32	1.32	4.70	4.96	10.00	11.96	
2.0+2.0+2.0+2.5+2.5	1.64	1.64	2.05	2.05	2.99	9.00	9.73	0.56	2.27	2.64	2.57	10.40	12.10	1.82	1.82	1.82	2.27	2.27	3.77	10.00	11.54	
2.0+2.0+2.0+2.5+3.5	1.50	1.50	1.50	1.88	2.63	3.14	9.00	10.08	0.56	2.26	2.84	2.57	10.40	13.00	1.67	1.67	1.67	2.08	2.92	4.07	10.00	11.55
2.0+2.0+2.0+2.5+4.2	1.42	1.42	1.42	1.77	2.98	3.24	9.00	10.20	0.60	2.26	2.90	2.74	10.40	13.40	1.57	1.57	1.57	1.97	3.31	4.26	10.00	11.55
2.0+2.0+2.0+2.5+5.0	1.33	1.33	1.33	1.67	3.33	3.48	9.00	10.38	0.56	2.25	2.98	2.60	10.40	13.70	1.48	1.48	1.48	1.85	3.70	4.50	10.00	11.69
2.0+2.0+2.0+2.5+6.0	1.24	1.24	1.24	1.55	3.72	3.67	9.00	10.61	0.59	2.25	3.11	2.80	10.30	14.30	1.38	1.38	1.38	1.72	4.14	4.78	10.00	11.93
2.0+2.0+2.0+2.5+7.1	1.15	1.15	1.15	1.44	4.10	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	1.28	1.28	1.28	1.60	4.55	5.10	10.00	11.96
2.0+2.0+2.0+3.5+3.5	1.38	1.38	1.38	2.42	2.42	2.99	9.00	9.65	0.56	2.26	2.58	2.57	10.40	11.90	1.54	1.54	1.54	2.69	3.77	10.00	11.54	
2.0+2.0+2.0+3.5+4.2	1.31	1.31	1.31	2.30	2.76	3.46	9.00	10.22	0.56	2.26	2.90	2.70	10.40	13.40	1.46	1.46	1.46	2.55	3.07	4.55	10.00	11.56
2.0+2.0+2.0+3.5+5.0	1.24	1.24	1.24	2.17	3.10	3.67	9.00	10.40	0.59	2.25	2.98	2.80	10.30	13.70	1.38	1.38	1.38	2.41	3.45	4.78	10.00	11.70
2.0+2.0+2.0+3.5+6.0	1.16	1.16	1.16	2.03	3.48	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	1.29	1.29	1.29	2.26	3.87	5.07	10.00	11.94
2.0+2.0+2.0+4.2+4.2	1.25	1.25	1.25	2.63	2.63	3.65	9.00	10.22	0.60	2.26	2.90	2.80	10.40	13.40	1.39	1.39	1.39	2.92	4.27	4.75	10.00	11.58
2.0+2.0+2.0+4.2+5.0	1.18	1.18	1.18	2.49	2.96	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	1.32	1.32	1.32	2.76	3.29	4.99	10.00	11.71
2.0+2.0+2.5+2.5+2.5	1.57	1.57	1.96	1.96	3.07	9.00	9.85	0.56	2.27	2.70	2.57	10.40	12.50	1.74	1.74	2.17	2.17	3.92	10.00	11.54		
2.0+2.0+2.5+2.5+3.5	1.44	1.44	1.80	1.80	2.52	3.21	9.00	10.20	0.60	2.26	2.90	2.74	10.40	13.40	1.60	1.60	2.00	2.80	4.21	10.00	11.55	
2.0+2.0+2.5+2.5+4.2	1.36	1.36	1.70	1.70	2.86	3.46	9.00	10.25	0.56	2.26	2.81	2.70	10.40	12.86	1.52	1.52	1.89	3.18	4.41	10.00	11.55	
2.0+2.0+2.5+2.5+5.0	1.29	1.29	1.61	1.61	3.21	3.48	9.00	10.39	0.56	2.25	2.98	2.60	10.30	13.70	1.43	1.43	1.79	3.57	4.64	10.00	11.69	
2.0+2.0+2.5+2.5+6.0	1.20	1.20	1.50	1.50	3.60	3.67	9.00	10.71	0.59	2.25	3.18	2.80	10.30	14.60	1.33	1.33	1.67	4.00	4.93	10.00	11.93	
2.0+2.0+2.5+3.5+3.5	1.33	1.33	1.67	2.33	2.33	3.46	9.00	10.22	0.56	2.26	2.90	2.70	10.40	13.40	1.48	1.48	1.85	2.59	4.50	10.00	11.55	
2.0+2.0+2.5+3.5+4.2	1.27	1.27	1.58	2.22	2.66	3.46	9.00	10.32	0.56	2.26	2.83	2.70	10.40	12.93	1.41	1.41	1.76	2.46	2.96	4.70	10.00	11.56
2.0+2.0+2.5+3.5+5.0	1.20	1.20	1.50	2.10	3.00	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	1.33	1.33	1.67	2.33	3.33	4.93	10.00	11.70
2.0+2.0+2.5+4.2+4.2	1.21	1.21	1.51	2.54	2.54	3.65	9.00	10.65	0.60	2.26	3.18	2.80	10.40	14.60	1.34	1.34	1.68	2.82	2.82	4.90	10.00	11.58
2.0+2.0+3.5+3.5+3.5	1.24	1.24	2.17	2.17	2.17	3.65	9.00	10.24	0.60	2.26	2.91	2.80	10.40	13.40	1.38	1.38	2.41	2.41	4.78	10.00	11.56	
2.0+2.0+3.5+3.5+4.2	1.18	1.18	2.07	2.07	2.49	3.65	9.00	10.77	0.60	2.26	3.25	2.80	10.40	14.90	1.32	1.32	2.30	2.76	4.99	10.00	11.58	
2.0+2.5+2.5+2.5+2.5	1.50	1.88	1.88	1.88	3.14	9.00	10.08	0.56	2.26	2.83	2.57	10.40	13.00	1.67	2.08	2.08	2.08	4.07	10.00	11.54		
2.0+2.5+2.5+2.5+3.5	1.38	1.73	1.73	1.73	2.42	3.46	9.00	10.21	0.56	2.26	2.90	2.70	10.40	13.40	1.54	1.92	1.92	2.69	4.36	10.00	11.55	
2.0+2.5+2.5+2.5+4.2	1.31	1.64	1.64	1.64	2.76	3.46	9.00	10.21	0.56	2.26	2.90	2.70	10.40	13.40	1.46	1.82	1.82	3.07	4.55	10.00	11.55	
2.0+2.5+2.5+2.5+5.0	1.24	1.55	1.55	1.55	3.10	3.67	9.00	10.39	0.59	2.25	2.98	2.80	10.30	13.70	1.38	1.72	1.72	3.45	4.78	10.00	11.69	
2.0+2.5+2.5+2.5+6.0	1.16	1.45	1.45	1.45	3.48	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	1.29	1.61	1.61	3.87	5.07	10.00	11.93	
2.0+2.5+2.5+3.5+3.5	1.29	1.61	1.61	2.25	2.25	3.46	9.00	10.22	0.56	2.26	2.90	2.70	10.40	13.40	1.43	1.79	1.79	2.50	2.50	4.64	10.00	11.55
2.0+2.5+2.5+3.5+4.2	1.22	1.53	1.53	2.14	2.57	3.65	9.00	10.65	0.60	2.26	3.18	2.80	10.40	14.60	1.36	1.70	1.70	2.38	2.86	4.85	10.00	11.56
2.0+2.5+2.5+3.5+5.0	1.16	1.45	1.45	2.03	2.90	3.67	9.00	10.72	0.59	2.25	3.18	2.80	10.30	14.60	1.29	1.61	1.61	2.26	3.23	5.07	10.00	11.70</td

Power input heating [kW]			Total current heating [A]			Power factor [%]	Seasonal data cooling				Seasonal data heating (average climate)					Seasonal data heating (warm climate)						
Min.	Nom.	Max.	Min.	Nom.	Max.		label	SEER	Pdesign	AEC	label	SCOP	Pdesign	AEC	Declared capacity at -10°C	Back-up heater capacity at -10°C	label	SCOP	Pdesign	AEC	Declared capacity at +2°C	Back-up heater capacity at +2°C
0.71	2.03	2.77	3.27	9.30	12.17	95	A++	7.90	9.00	399	A+	4.49	6.46	2013	5.27	1.19	A+++	5.45	3.60	925	3.60	0
0.77	2.02	2.77	3.53	9.25	12.17	95	A++	7.90	9.00	399	A+	4.50	6.46	2007	5.27	1.19	A+++	5.44	3.60	926	3.60	0
0.79	1.97	2.77	3.61	9.02	12.17	95	A++	7.93	9.00	397	A++	4.62	6.46	1957	5.29	1.17	A+++	5.42	3.80	981	3.80	0
0.82	2.02	2.76	3.74	9.25	12.13	95	A++	7.91	9.00	398	A+	4.52	6.46	2000	5.28	1.18	A+++	5.45	3.70	950	3.70	0
0.79	2.02	2.77	3.61	9.25	12.17	95	A++	7.91	9.00	399	A+	4.51	6.46	2006	5.27	1.19	A+++	5.46	3.60	923	3.60	0
0.82	2.02	2.76	3.74	9.25	12.13	95	A++	7.91	9.00	398	A+	4.52	6.46	2000	5.28	1.18	A+++	5.45	3.70	950	3.70	0
0.85	2.00	2.76	3.87	9.16	12.13	95	A++	7.92	9.00	398	A+	4.56	6.46	1981	5.29	1.17	A+++	5.46	3.70	948	3.70	0
0.55	2.05	2.77	2.50	9.39	12.17	95	A++	7.83	8.50	380	A+	4.47	6.46	2023	5.27	1.19	A+++	5.42	3.60	929	3.60	0
0.56	2.05	2.77	2.58	9.39	12.17	95	A++	7.72	8.70	395	A+	4.48	6.46	2017	5.27	1.19	A+++	5.42	3.60	929	3.60	0
0.63	2.04	2.77	2.88	9.34	12.17	95	A++	7.86	9.00	401	A+	4.51	6.46	2006	5.28	1.18	A+++	5.41	3.70	957	3.70	0
0.65	2.03	2.77	2.97	9.30	12.17	95	A++	7.86	9.00	401	A+	4.52	6.46	2000	5.28	1.18	A+++	5.40	3.70	958	3.70	0
0.67	2.00	2.78	3.05	9.16	12.22	95	A++	7.89	9.00	399	A++	4.61	6.46	1959	5.29	1.17	A+++	5.36	3.80	992	3.80	0
0.68	1.99	2.70	3.10	9.11	11.85	95	A++	7.91	9.00	399	A++	4.64	6.46	1948	5.30	1.16	A+++	5.32	3.90	1025	3.90	0
0.74	1.99	2.68	3.40	9.11	11.76	95	A++	7.93	9.00	398	A++	4.66	6.46	1937	5.30	1.16	A+++	5.28	4.00	1059	4.00	0
0.58	2.04	2.77	2.67	9.34	12.17	95	A++	7.76	9.00	406	A+	4.49	6.46	2010	5.27	1.19	A+++	5.43	3.60	927	3.60	0
0.65	2.03	2.77	2.97	9.30	12.17	95	A++	7.77	9.00	405	A+	4.52	6.46	1999	5.28	1.18	A+++	5.42	3.70	955	3.70	0
0.67	2.03	2.77	3.05	9.30	12.17	95	A++	7.78	9.00	405	A+	4.53	6.46	1993	5.29	1.17	A+++	5.42	3.70	956	3.70	0
0.70	1.99	2.78	3.18	9.11	12.22	95	A++	7.81	9.00	404	A++	4.62	6.46	1955	5.30	1.16	A+++	5.33	3.90	1024	3.90	0
0.70	1.99	2.70	3.18	9.11	11.85	95	A++	7.83	9.00	403	A++	4.65	6.46	1944	5.30	1.16	A+++	5.29	3.90	1032	3.90	0
0.77	1.98	2.68	3.53	9.07	11.76	95	A++	7.85	9.00	401	A++	4.67	6.46	1933	5.30	1.16	A+++	5.25	4.00	1066	4.00	0
0.58	2.03	2.77	2.67	9.30	12.17	95	A++	7.78	9.00	405	A+	4.54	6.46	1992	5.29	1.17	A+++	5.43	3.70	953	3.70	0
0.74	2.03	2.77	3.40	9.30	12.17	95	A++	7.79	9.00	405	A+	4.55	6.46	1986	5.29	1.17	A+++	5.43	3.80	980	3.80	0
0.77	1.99	2.77	3.53	9.11	12.17	95	A++	7.82	9.00	403	A++	4.65	6.46	1941	5.30	1.16	A+++	5.39	3.90	1013	3.90	0
0.77	1.99	2.69	3.53	9.11	11.81	95	A++	7.84	9.00	402	A++	4.68	6.46	1931	5.30	1.16	A+++	5.35	4.00	1047	4.00	0
0.76	2.02	2.76	3.48	9.25	12.13	95	A++	7.80	9.00	404	A++	4.61	6.46	1961	5.29	1.17	A+++	5.44	3.80	977	3.80	0
0.79	2.01	2.83	3.61	9.20	12.40	95	A++	7.83	9.00	403	A++	4.66	6.46	1938	5.30	1.16	A+++	5.37	3.90	1016	3.90	0
0.63	2.04	2.77	2.88	9.34	12.17	95	A++	7.74	9.00	407	A+	4.49	6.46	2011	5.27	1.19	A+++	5.43	3.60	929	3.60	0
0.67	2.03	2.77	3.05	9.30	12.17	95	A++	7.76	9.00	406	A+	4.52	6.46	1999	5.28	1.18	A+++	5.41	3.70	957	3.70	0
0.70	2.03	2.77	3.18	9.30	12.17	95	A++	7.76	9.00	406	A+	4.53	6.46	1993	5.29	1.17	A+++	5.41	3.70	957	3.70	0
0.71	1.99	2.78	3.27	9.11	12.22	95	A++	7.79	9.00	404	A++	4.63	6.46	1953	5.30	1.16	A+++	5.37	3.90	1017	3.90	0
0.75	1.99	2.70	3.44	9.11	11.85	95	A++	7.81	9.00	403	A++	4.65	6.46	1942	5.30	1.16	A+++	5.33	3.90	1024	3.90	0
0.71	1.99	2.77	3.27	9.11	12.17	95	A++	7.77	9.00	406	A++	4.60	6.46	1963	5.29	1.17	A+++	5.47	3.70	946	3.70	0
0.77	1.99	2.77	3.53	9.11	12.17	95	A++	7.77	9.00	406	A++	4.62	6.46	1957	5.29	1.17	A+++	5.47	3.80	972	3.80	0
0.79	1.98	2.77	3.61	9.07	12.17	95	A++	7.80	9.00	404	A++	4.67	6.46	1934	5.30	1.16	A+++	5.40	3.90	1011	3.90	0
0.82	1.99	2.82	3.74	9.11	12.36	95	A++	7.78	9.00	405	A++	4.63	6.46	1951	5.29	1.17	A+++	5.48	3.80	970	3.80	0
0.79	1.99	2.77	3.61	9.11	12.17	95	A++	7.77	9.00	405	A++	4.62	6.46	1957	5.29	1.17	A+++	5.48	3.80	970	3.80	0
0.82	1.99	2.82	3.74	9.11	12.36	95	A++	7.78	9.00	405	A++	4.63	6.46	1951	5.29	1.17	A+++	5.48	3.80	970	3.80	0
0.65	2.03	2.77	2.97	9.30	12.17	95	A++	7.75	9.00	407	A+	4.52	6.46	1999	5.28	1.18	A+++	5.42	3.70	955	3.70	0
0.70	2.03	2.77	3.18	9.30	12.17	95	A++	7.76	9.00	406	A+	4.55	6.46	1987	5.29	1.17	A+++	5.41	3.80	983	3.80	0
0.74	2.02	2.77	3.40	9.25	12.17	95	A++	7.76	9.00	406	A+	4.56	6.46	1981	5.29	1.17	A+++	5.41	3.80	983	3.80	0
0.77	1.99	2.78	3.53	9.11	12.22	95	A++	7.80	9.00	404	A++	4.65	6.46	1942	5.30	1.16	A+++	5.37	3.90	1017	3.90	0
0.77	1.98	2.70	3.53	9.07	11.85	95	A++	7.82	9.00	403	A++	4.68	6.46	1931	5.31	1.15	A+++	5.33	4.00	1050	4.00	0
0.77	1.99	2.77	3.53	9.11	12.17	95	A++	7.77	9.00	406	A++	4.60	6.46	1963	5.29	1.17	A+++	5.46	3.80	974	3.80	0
0.79	1.99	2.77	3.61	9.11	12.17	95	A++	7.77	9.00	405	A++	4.62	6.46	1957	5.30	1.16	A+++	5.46	3.80	975	3.80	0
0.82	1.98	2.77	3.74	9.07	12.17	95	A++	7.83	9.00	403	A++	4.67	6.46	1934	5.31	1.15	A+++	5.38	4.00	1040	4.00	0
0.85	1.99	2.82	3.87	9.11	12.36	95	A++	7.77	9.00	406	A++	4.63	6.46	1951	5.30	1.16	A+++	5.47	3.80	972	3.80	0
0.82	1.99	2.77	3.74	9.11	12.17	95	A++	7.78	9.00	405	A++	4.62	6.46	1957	5.30	1.16	A+++	5.47	3.80	972	3.80	0
0.68	2.03	2.77	3.10	9.30	12.17	95	A++	7.73	9.00	408	A+	4.55	6.46	1987	5.29	1.17	A+++	5.42	3.80	981	3.80	0
0.72	2.02	2.66	3.31	9.25	12.17	95	A++	7.74	9.00	407	A+	4.57	6.46	1975	5.30	1.16	A+++	5.41	3.80	983	3.80	0
0.77	2.02	2.66	3.53	9.25	12.17	95	A++	7.75	9.00	407	A+	4.59	6.46	1970	5.30	1.16	A+++	5.41	3.80	983	3.80	0
0.80	2.00	2.67	3.66	9.16	12.22	95	A++	7.75	9.00	407	A++	4.64	6.46	1946	5.31	1.15	A+++	5.34	4.00	1049	4.00	0
0.80	2.02	2.66	3.66	9.25	12.17	95	A++	7.76	9.00	406	A++	4.60	6.46	1965	5.30	1.16	A+++	5.42	3.80	981	3.80	0
0.82	2.01	2.66	3.74	9.20	12.17	95	A++	7.76	9.00	406	A++											



